

*Paragon Semiconductor Lighting Technology*

*PSLT*

**ParagonLED**

## Specifications

**Product Type : CBAV-84-5028-24V-30**

**Issued Date : 07/01/2013**

Paragon Semiconductor Lighting Technology Co., Ltd.  
Headquarters: 3F., No.369, Sec. 2, Wenhua 2nd Rd., Linkou Dist., New Taipei City 244, Taiwan (R.O.C.)  
TEL: +886-2-2602-1066      FAX: 886-2-2601-0508

# Contents

## 1. General Description

1-1 Naming Rule

1-2 Outline dimensions

## 2. Electro-optical characteristics

2-1 Absolute Maximum Rating

2-2 Electro-optical characteristics

2-3 Graphs


2-4 Layout

## 3. Junction Temperature measurement


## 4. Reliability Test

## 1. General Description

### (1) Naming rule

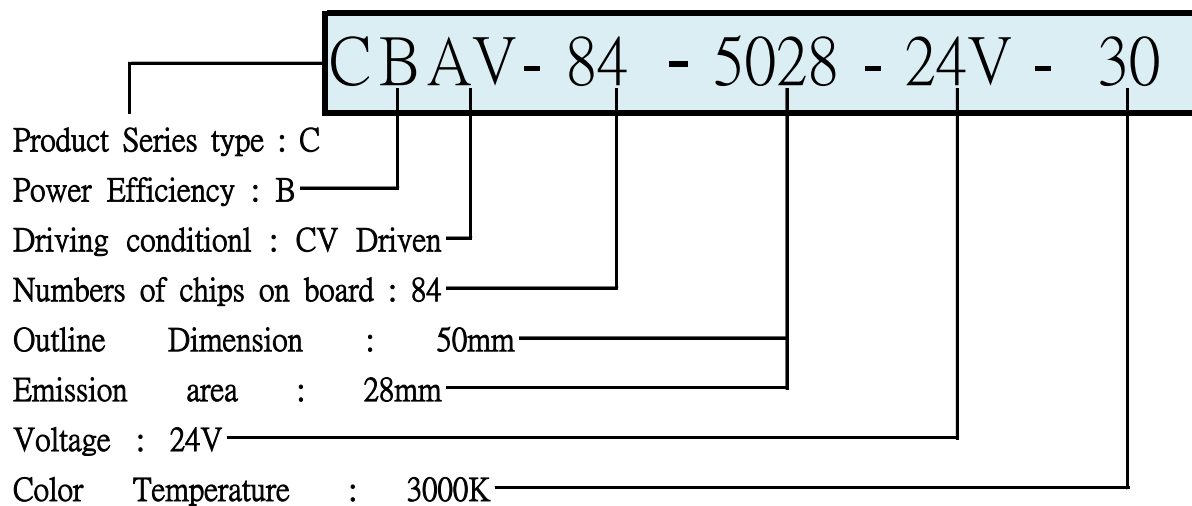

### (2) Outline Dimensions (Unit : mm / Tolerance: 0.2mm)

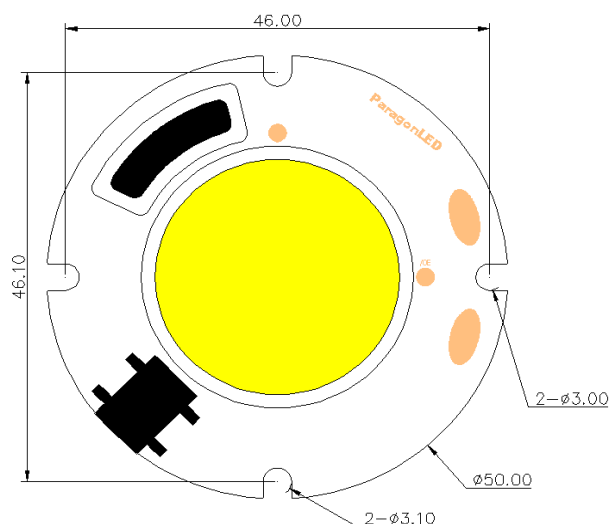

Thickness :  $1.6 \pm 0.2$ mm

## 2. Electro-Optical Characteristics

### (1) Absolute Maximum Rating

Parameter	Symbol	Value	Unit
Power Dissipation	PD	18	W
Forward Current	IF	—	mA
Forward Voltage	VF	24 ~ 24	V
Operating Temperature	Topr	-40 ~ +85	°C
Storage Temperature	Tstg	-40 ~ +100	°C
Assembly process temperature	Tsol	<300°C , 5 secs	

## (2) Electro-Optical Characteristics


Parameter	Symbol	Condition	Min	Typ	Max	Unit
Forward Voltage	VF	–	24	24	24	V
Reverse Current	IR	VR=24V	–	–	100	$\mu A$
Luminous Intensity	$\Phi_v$	VF=24V	–	900	–	Lm
Color rendering	Ra	VF=24V	–	80	–	

**Notice:** The output voltage of CV driver should not exceed 24V · users must keep the temperature of solder joint point under 60°C (with suitable heat sink), or may cause Serious luminous decay. We DO NOT guarantee of improper use.



## (3) Characteristics

CV series can be driven by constant voltage drivers directly.  
Lumens and wattages depend on the voltage delivers


### Spectrum

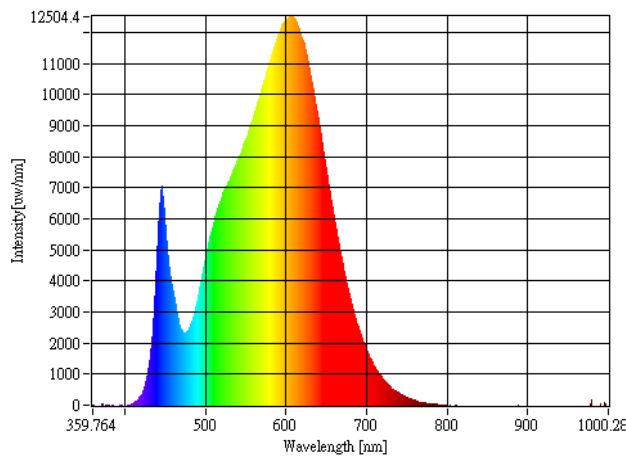

### Candle Power Distribution & Cartesian Coordinate

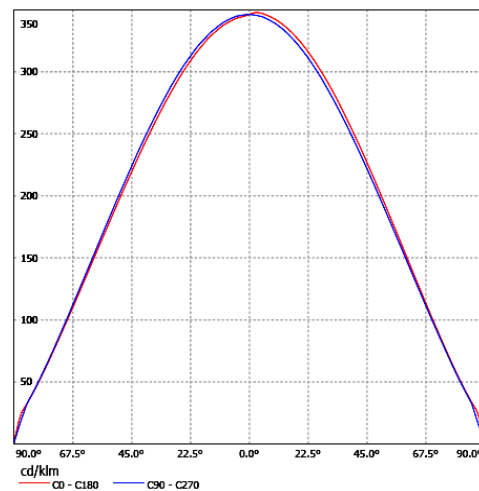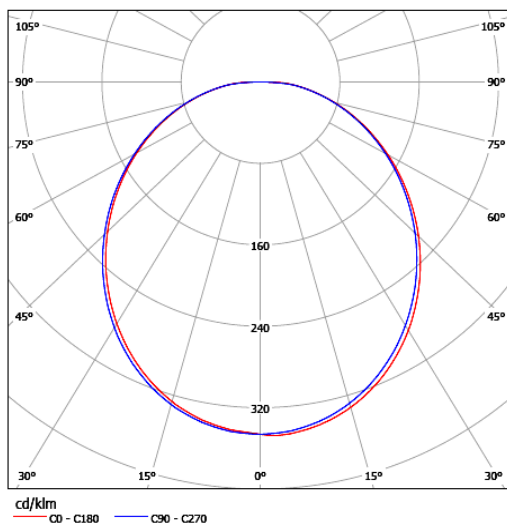


#### (4) Layout

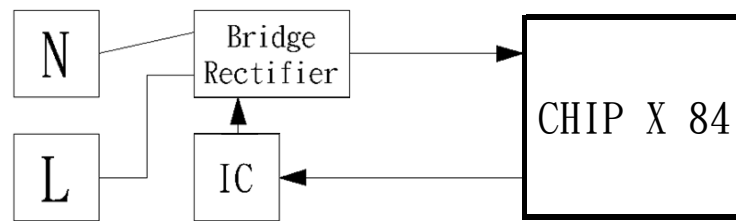

7 series x 12 parallel = 84 LED Chips

### 3. Junction Temperature Measurement

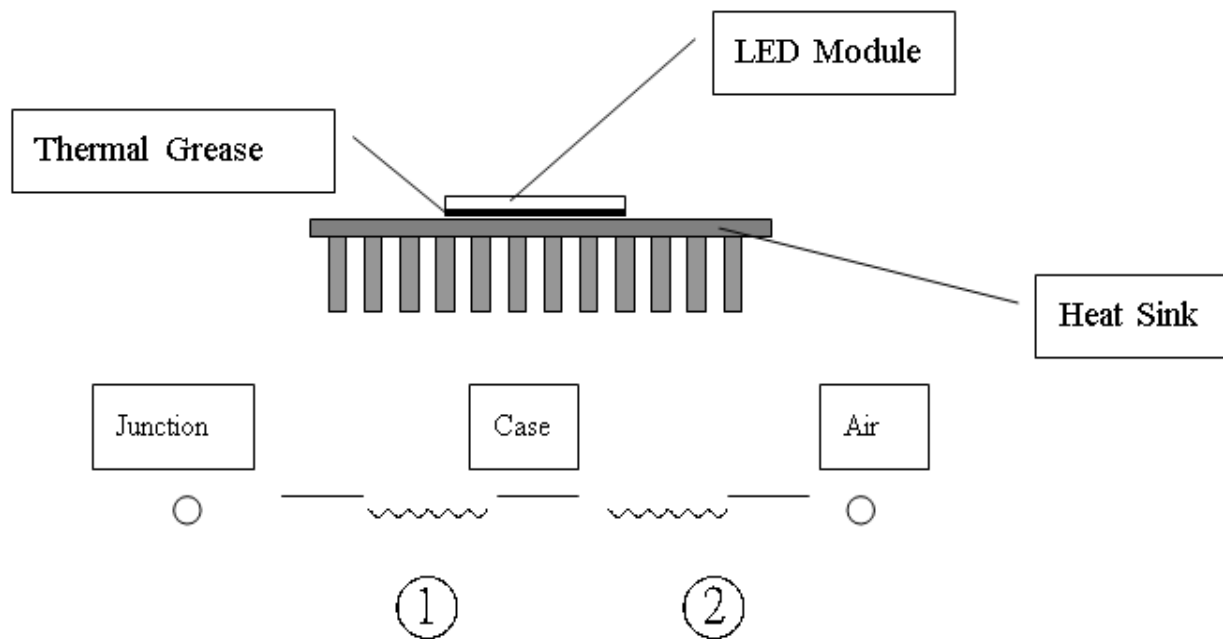

① Thermal resistance of Junction to Case without heat sink : 10(°C/W) [ Reference Value ]

② Thermal resistance of Case to Ambient Air: Depending on what kind of heat sink users choose. In ideal thermal dissipation situation, the thermal resistance is about 1~2 °C/W.

## 4. Reliability Test

Test Item	Test Conditions	Number of failed
High Temperature Storage Test	Tstg= +80°C , x1,000 hrs	0/20
Low Temperature Storage Test	Tstg=-40°C , x1,000 hrs	0/20
Continuous Light-on Test	Ta= 25°C , RH=65% , x1,00 hrs	0/20
Boiling Test	Ta=100°C , RH=100% , X180mins	0/20
Thermal Cycle Test	- 40°Cx30mins , 80°Cx30mins , 100cycles	0/20

Measuring Item	Measuring Condition	Judging Criteria of Failure
Forward Voltage	VF=24V	> 0 x 1.1
Total Luminous Flux	VF=24V	< L x 0.85

**WARNING : Please ground lighting fixtures while designing lamps.**  
**If any damage or defect of LED caused without grounding, we do not guarantee of improper use.**