

Paragon Semiconductor Lighting Technology

PSLT

ParagonLED

Specifications

Product Type : G2C000100-230V12WC30

Issued Date : 06/06/2014

Contents

1. General Description

1-1 Naming Rule

1-2 Outline dimensions

2. Electro-optical characteristics

2-1 Absolute Maximum Rating

2-2 Electro-optical characteristics

2-3 Graphs


2-4 Layout

3. Junction Temperature measurement


4. Reliability Test

1.General Description

(1)Naming rule

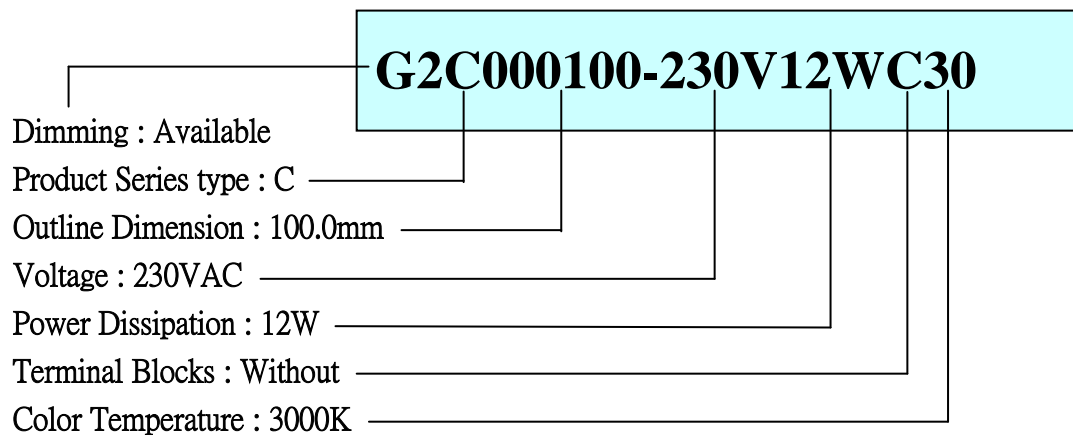

(2)Outline Dimensions (Unit : mm / Tolerance: 0.2mm)

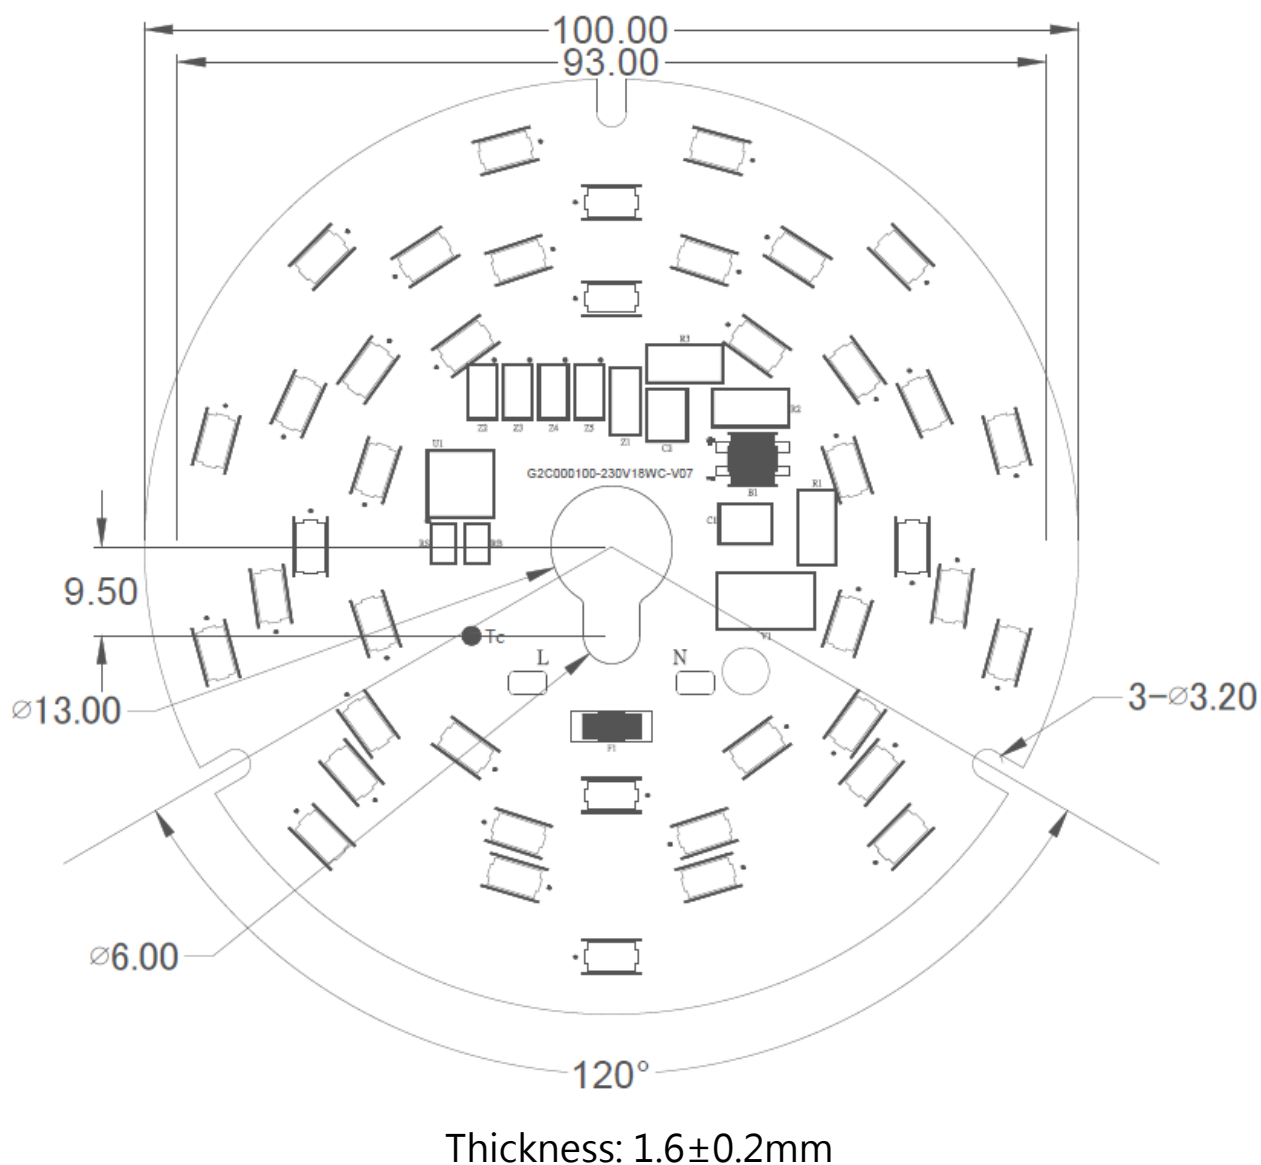

2.Electro-Optical Characteristics

(1)Absolute Maximum Rating

Parameter	Symbol	Value	Unit
Power Dissipation	P_D	12	W
Forward Voltage	V_F	230	V
Operating Temperature	T_{opr}	-40 ~ +105	°C
Storage Temperature	T_{stg}	-40 ~ +105	°C
Power Factor	Pf	>0.95	
THDi		<15%	
Dimming		Available	
Assembly process temperature	T_{sol}	<325°C , 5 secs	


(2)Electro-Optical Characteristics

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Forward Voltage	V_F	—	—	230	—	V
Reverse Current	I_R	$V_R=230V$	—	—	20	μA
Luminous Intensity	Φ_v	$V_F=230V$	—	1060	—	Lm
Color rendering	Ra	$V_F=230V$	—	80	—	CRI

Notice: Operating Voltage of product varies from 220V~250V · users must keep the temperature of solder joint point under 105 °C (with suitable heat sink), or may cause Serious luminous decay. We DO NOT guarantee of improper use.


(3) Graphs

 **Spectrum**

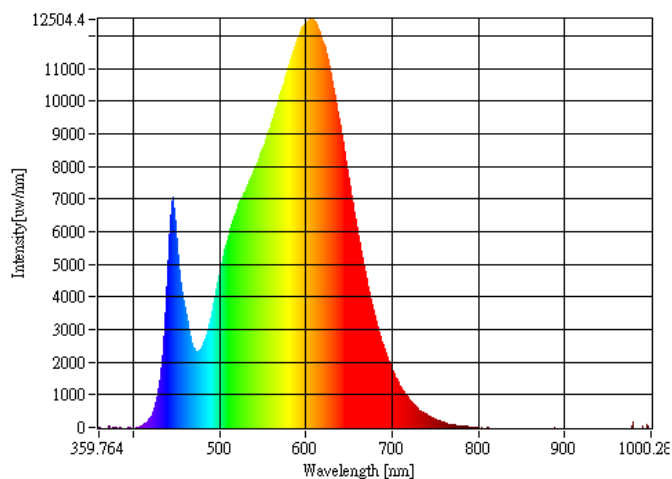





Candle Power Distribution & Cartesian Coordinate

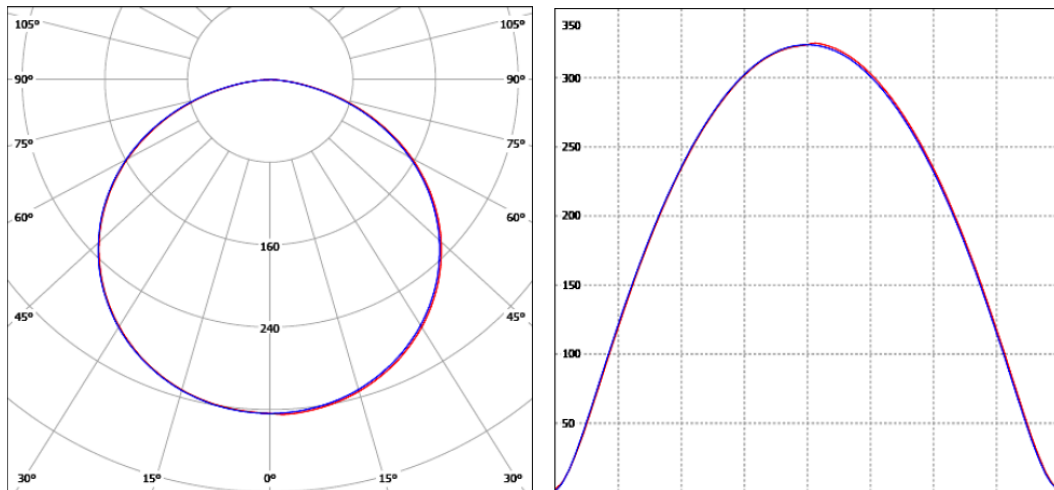

(4)Layout

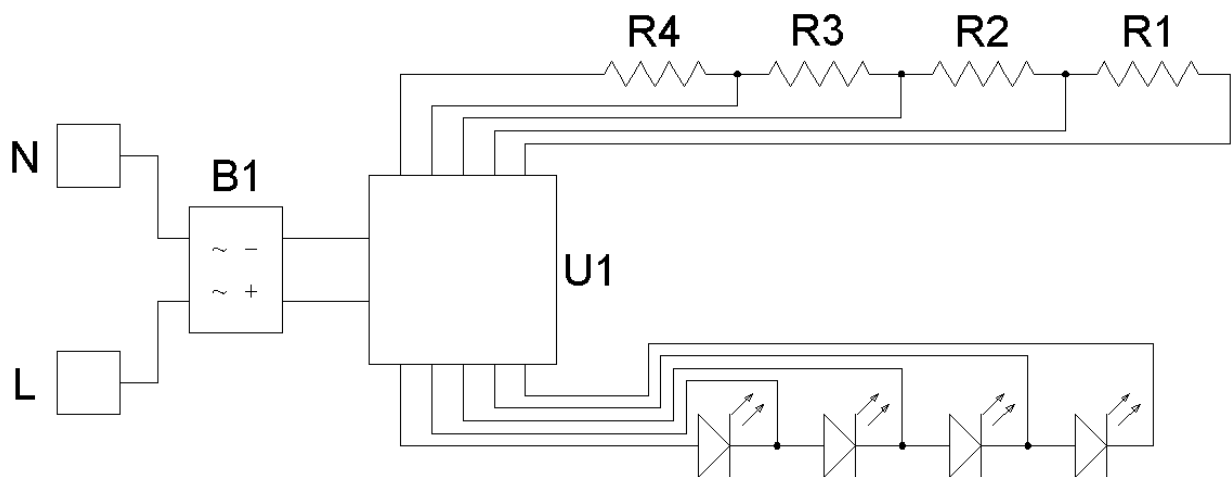

3. Junction Temperature Measurement

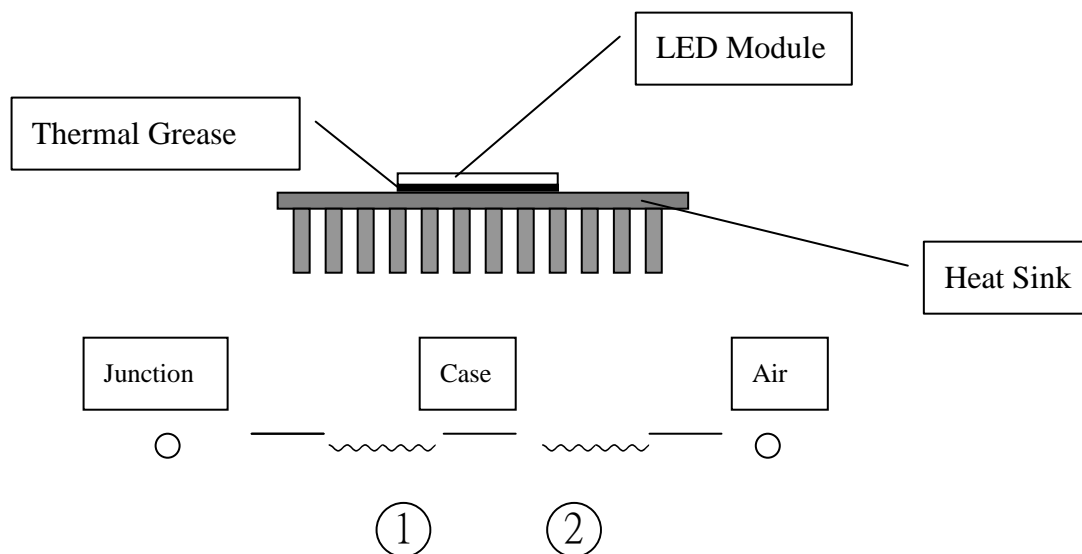

- ① Thermal resistance of Junction to Case without heat sink : $10^{\circ}\text{C}/\text{W}$ [Reference Value]
- ② Thermal resistance of Case to Ambient Air: Depending on what kind of heat sink users choose. In ideal thermal dissipation situation, the thermal resistance is about $1\sim 2^{\circ}\text{C}/\text{W}$.

4. Reliability Test

Test Item	Test Conditions	Number of failed
High Temperature Storage Test	Tstg= $+80^{\circ}\text{C}$, x1,000 hrs	0/20
Low Temperature Storage Test	Tstg= -40°C , x1,000 hrs	0/20
Continous Light-on Test	Ta= 25°C , RH=65%, x1,000 hrs	0/20
Boiling Test	Ta= 100°C , RH=100%, x180mins	0/20
Thermal Cycle Test	-40°C x 30 mins, 80°C x 30 mins, 100 cycles	0/20

Measuring Item	Measuring Condition	Judging Criteria of Failure
Forward Voltage	$I_F = 230\text{V}$	$> 0 \times 1.1$
Total Luminous Flux	$I_F = 230\text{V}$	$< L \times 0.7$