

Paragon Semiconductor Lighting Technology

PSLT

ParagonLED

Specifications

Product Type : SBAC-156-5050-220V-45

Issued Date : 07/01/2013

Paragon Semiconductor Lighting Technology Co., Ltd.
Headquarters: 3F., No.369, Sec. 2, Wenhua 2nd Rd., Linkou Dist., New Taipei City 244, Taiwan (R.O.C.)
TEL: +886-2-2602-1066 FAX: 886-2-2601-0508

Contents

1. General Description

1-1 Naming Rule

1-2 Outline dimensions

2. Electro-optical characteristics

2-1 Absolute Maximum Rating

2-2 Electro-optical characteristics

2-3 Graphs


2-4 Layout

3. Junction Temperature measurement


4. Reliability Test

1. General Description

(1) Naming rule

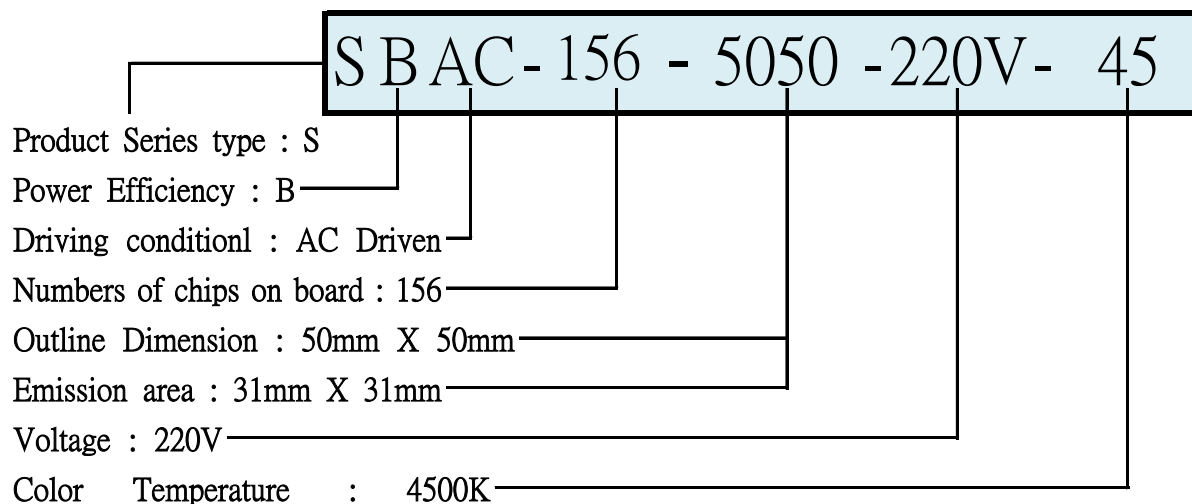

(2) Outline Dimensions (Unit : mm / Tolerance: 0.2mm)

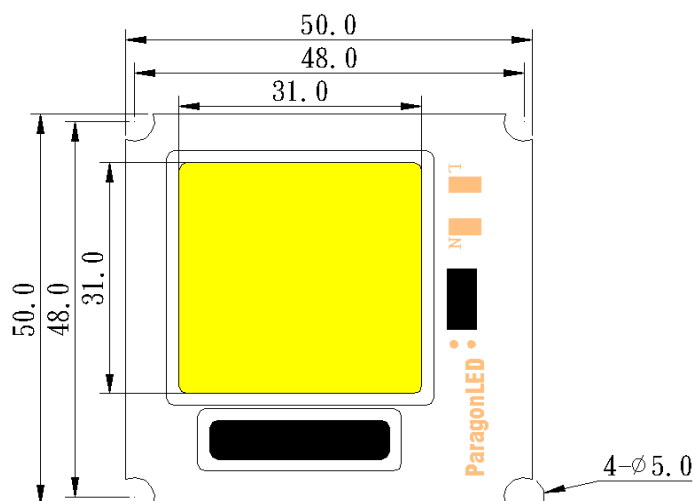

Thickness : 1.6 ± 0.2 mm

2. Electro-Optical Characteristics

(1) Absolute Maximum Rating

| Parameter | Symbol | Value | Unit |
|------------------------------|--------|-----------------|------|
| Power Dissipation | PD | 44 | W |
| Forward Current | IF | — | mA |
| Forward Voltage | VF | 210 ~ 240 | V |
| Operating Temperature | Topr | -40 ~ +85 | °C |
| Storage Temperature | Tstg | -40 ~ +100 | °C |
| Assembly process temperature | Tsol | <300°C , 5 secs | |


(2) Electro-Optical Characteristics

| Parameter | Symbol | Condition | Min | Typ | Max | Unit |
|--------------------|----------|-----------|-----|------|-----|---------------|
| Forward Voltage | VF | – | 210 | 220 | 240 | V |
| Reverse Current | IR | – | – | – | – | μA |
| Luminous Intensity | Φ_v | VF=220V | – | 3205 | – | Lm |
| Color rendering | Ra | VF=220V | – | 85 | – | |

Notice: Operating voltage of SBAC-156 product varies from 210V~240V · users must keep the temperature of solder joint point under 60°C (with suitable heat sink), or may cause Serious luminous decay. We DO NOT guarantee of improper use.

(3) Characteristics


Spectrum

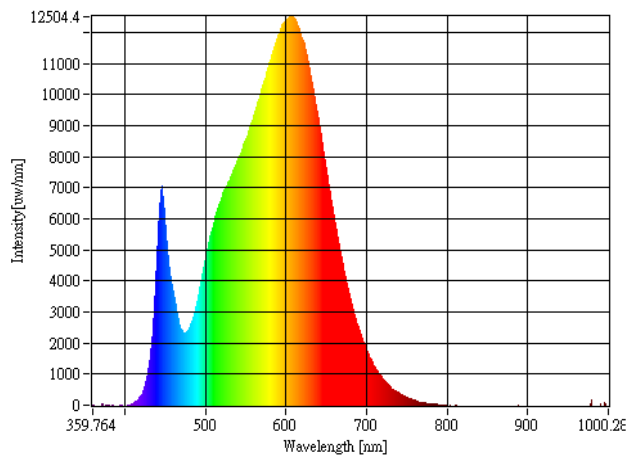


Candle Power Distribution & Cartesian Coordinate



(4) Layout

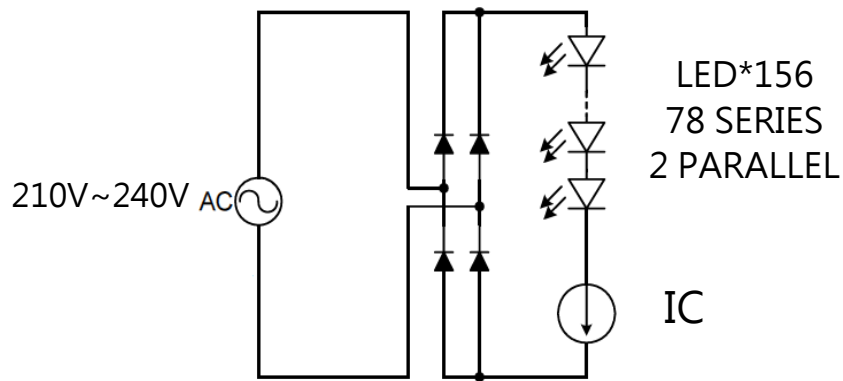

3. Junction Temperature Measurement

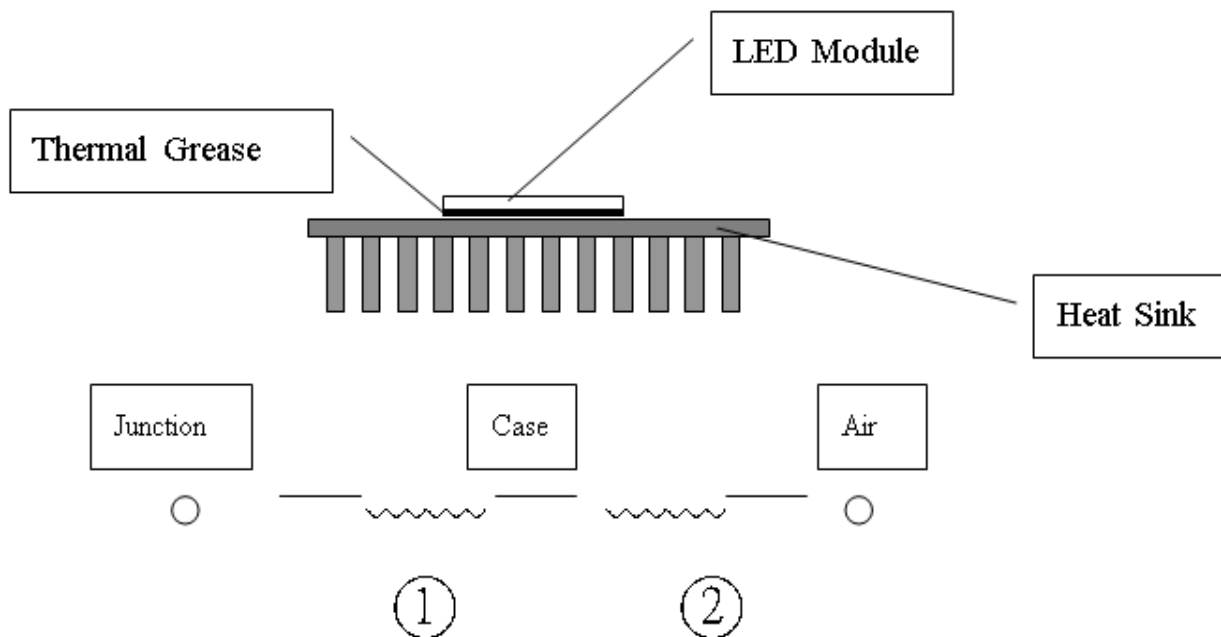

① Thermal resistance of Junction to Case without heat sink : 10(°C/W) [Reference Value]

② Thermal resistance of Case to Ambient Air: Depending on what kind of heat sink users choose. In ideal thermal dissipation situation, the thermal resistance is about 1~2 °C/W.

4. Reliability Test

| Test Item | Test Conditions | Number of failed |
|-------------------------------|-----------------------------------------|------------------|
| High Temperature Storage Test | Tstg= +80°C , x1,000 hrs | 0/20 |
| Low Temperature Storage Test | Tstg=-40°C , x1,000 hrs | 0/20 |
| Continuous Light-on Test | Ta= 25°C , RH=65% , x1,00 hrs | 0/20 |
| Boiling Test | Ta=100°C , RH=100% , X180mins | 0/20 |
| Thermal Cycle Test | - 40°Cx30mins , 80°Cx30mins , 100cycles | 0/20 |

| Measuring Item | Measuring Condition | Judging Criteria of Failure |
|---------------------|---------------------|-----------------------------|
| Forward Voltage | VF=220V | > 0 x 1.1 |
| Total Luminous Flux | VF=220V | < L x 0.85 |

WARNING : Please ground lighting fixtures while designing lamps.
If any damage or defect of LED caused without grounding, we do not guarantee of improper use.