

NZC-WD2020GSB


- SONY 1/2.8" 2.0MegaPixel CMOS STARVIS Sensor
- 1920x1080@25/30fps (1080P) ; H.264, MPEG4, M-JPEG
- Color:0.02Lux@F1.6, B/W:0.005Lux@F1.6
- 2D/3D Noise Reduction
- Fog Reduction ; High Light Compensation
- Motion Detection
- Two-way Audio & Multicast Support
- Support PoE(15W Switch) Power Input (Option)
- Support ONVIF Profile S
- 20x optical Zoom, f4.7mm(Wide)~94mm(Tele)
- Video Output: Support SDI 1080P



Video	Image Sensor	SONY 1/2.8" 2.0MegaPixel CMOS STARVIS Sensor
	Video Resolution/Frame Rate	1920x1080@25fps (1080P) , 1280x1024@30fps, 1280x960@30fps, 1280x720@30fps, 720x480@30fps
	Video Frame Rate	Up to 30fps for All Video except 1080P
	Video Compression	H.264, MPEG4, M-JPEG
	Minimum Illumination	Color:0.02Lux@F1.6, B/W:0.005Lux@F1.6
	WDR/HDR	Yes
	Video Output	SDI Output
	Signal to Noise Ratio	More than 52dB (AGC off)
	Mechanical IR Cut Filter	Automatically Switches (Adjustable Level); External
	IR LED ; Working Distance	---
Function	Menu	Can Be Set Via Browser
	Day&Night Mode	Day / Night / Compul(External) / Auto
	Auto Electronic Shutter	(1/30 ~ 1/34,000s for NTSC, 1/25~1/34,000s for PAL)
	Manual Electronic Shutter	1/25(30), 1/50(60)(Flickerless), 1/100, 1/120, 1/150, 1/180, 1/250, 1/350, 1/500, 1/750, 1/1,000, 1/2,000, 1/4,000, 1/10,000, 1/34,000 sec.
	White Balance	AUTO / ATW / AWB (One push)
	WDR/BLC	Off/Low/Mid/High
	DNR ; Sense Up	2D&3D(3D: Off/Low/Mid/High); ---
	Language	English / Japanese / Chinese (Traditional, Simplified) / Russian / Hungarian / German / Persian / Spanish / Polish / Dutch / Portuguese / French / Italian
	Image Setting	Gamma / AGC / WDR / Back Light Compensation / Eclipse(HLC) / Fog Reduction / DNR / D-ZOOM / Mirror / Freeze
	Integrated Video Detection	Motion Detection (Area/Sense-level/Display)
	Timer Clock	Yes
	Camera Control Interface	Pelco D, Pelco P, Customer
Network	Browser	IE 8.0 or Above
	Ethernet	10/100M Auto Negotiation
	Bit Rate Transmission	64 up to 12,000 Kbps
	Supported Protocols	TCP IP, UDP, HTTP, SMTP, FTP, NTP, DNS, DHCP, PPPoE, ARP, UPnP, QoSRTSP, RTP, SNMP, TRAP, Ethernet (RJ-45 Wired 10/100M Base-TX)
	Video Streaming	H.264, MPEG4 and M-JPEG Dual/Triple Streaming
	Audio Streaming	Two-way Audio ; G.711 (μLaw), 8KHz/16KHz Sample Rate
	Users	Support 9 Users
	Security	ID/Password Protection
	Alarm Trigger	File Upload via FTP and Email/Notification via Email, HTTP, External Digital Output Activation, micro SD Recording
	Multicast	Support Multicast Function
General	Connector	Audio, RJ45 / PoE, Power, BNC, Reset, RS485, MicroSD Slot
	Heater; Cooler	---;---
	Minimum Working Distance	Wide: 0.1M/Tele: 1.5M
	Focusing System	AUTO / MANUAL / PUSH AF
	Lens, Angle of View (H)	20X Optical Zoom f4.7mm(Wide)~94mm(Tele), F1.6 to F3.5 Lens
	Water Resistance	---
	Max. Breaking Strength	---
	Power Supply ; Consumption	12Vdc / PoE(15W Switch) ; 7.8W
	Operation ; Storage Temp.	-10° C ~ 50° C ; -20° C ~ 60° C
	Operation ; Storage Humidity	Maximum: RH80% ; RH90%
	Dimensions	67(W)x72(H)x170(L)mm
	Net Weight	660g

Dimensions

Tol:±0.5 Unit:mm

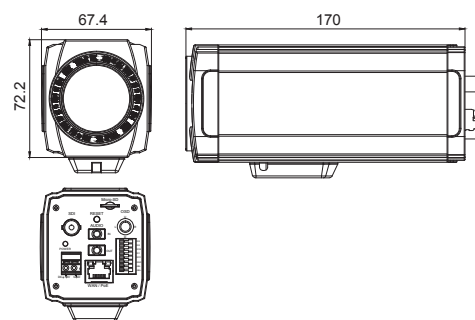

支架选配

*Specifications are subject to change without notice. _sENG_NZC-WD2020GSB_20171103