

SNC-WD2201MSZ-II

2M 3.5X / 10X Zoom

STARVIS


2M Starlight, HDR and Auto-focus Camera

- Full HD 1920x1080P@25/30fps
- 1/2.8" SONY 2.16 Megapixel STARVIS CMOS Sensor
- Color: 0.02Lux@F1.2, B/W: 0.005Lux@F1.2, Sense-up: 0.001Lux@F1.2
- Optical 10X (f5~50mm) AF, F1.8 to F3.0 & Max 8X E-Zoom
- True WDR up to 120dB
- ROI for Smart Zoom/Motion Detect
- Day/Night Switch Re-auto Focus
- Advanced Day/Night Focus Preset
- Lens Shading Compensation
- 2D/3D Noise Reduction & Sense up
- Fog Reduction Auto/Manual Mode




IP Camera

Video	Image Sensor	1/2.8" SONY 2.16 Megapixel STARVIS CMOS Sensor
	Video Frame Rate (Maximum)	1920x1080@25/30fps, 1280x1024@25/30fps, 1280x720@25/30fps, 720x480@25/30fps
	Minimum Illumination	Color: 0.02Lux@F1.2, B/W: 0.005Lux@F1.2, Sense-up: 0.001Lux@F1.2
	Wide Dynamic Range	120dB
	Video Output	1.0Vp-p Composite, 75Ω (BNC)
	Mechanical IR Cut Filter (ICR)	Yes
	IR LED ; Working Distance (Meter)	N/A
Function	Day & Night Mode	Color / B&W / Auto / External
	Auto Electronic Shutter	1/25(30)~1/30,000 sec; Flickerless
	Manual Electronic Shutter	1/25(30), 1/50(60), 1/100(120), 1/240, 1/500, 1/1000, 1/2000, 1/4000, 1/8000, 1/16000, 1/30000 sec
	White Balance	ATW / AWB / PWB(Push Lock) / Manual
	WDR & BLC Functions	D-WDR / WDR / BLC / HLC
	Fog Reduction	Auto / Manual / Off; Level: High / Middle / Low
	DNR	High / Middle / Low / Off
	Sense up	On (x2, x4, x8, x16, x32) / Off
	Language	English / Japanese / Traditional Chinese / Simplified Chinese / Russian / Hungarian / German / Persia / Spanish / Polish / Dutch
	E-Zoom	1.0X~8.0X (step 0.1)
	Image Setting	Sharpness / Mirror / Flip
	Privacy Zone Masks	16 Zones Programmable
	Motion Detection	On: Sensitivity, Area Program/Off
	Lens Shading Compensation	On / Off
	Network	Browser
Ethernet		10 / 100M Auto Negotiation
Bit Rate		64 up to 12,000 Kbps
Protocols		TCP IP, UDP, HTTP, SMTP, FTP, NTP, DNS, DHCP, PPPoE, ARP, UPnP, RTSP, RTP, SNMP, TRAP, Ethernet (RJ-45 Wired 10/100 Base-TX)
Video Streaming		H.264, MPEG4 and M-JPEG Dual / Triple Streaming
Audio Broadcast		Two-way Audio; G.711 (μLaw), 8KHz / 16KHz Sample Rate
Users		Support 9 Users
Security		ID / Password Protection
General	Alarm Trigger	File Upload via FTP and Email/Notification via Email, HTTP
	Multicast	Support Multicast Function
	Focusing System	Zoom & Auto Focus; Day / Night Focus Preset
	Connector	Audio, RJ45, DC Power, BNC, DI / DO / RS485, Reset Button, Micro SD Slot
	Alarm In / Out	DI / DO
	Automatic IRIS ; Connector	DC
	Lens Adapter	Built-in Zoom Lens
	Lens	10X Optical Zoom f5mm(Wide) ~ 50mm(Tele), F1.8 to F3.0
	Water Resistance	N/A
	Max. Breaking Strength	N/A
	Power Supply ; Consumption	12Vdc / PoE ; 4W
	Operation; Storage Temp.	-10°C ~ 50°C ; -20°C ~ 60°C
	Operation; Storage Humidity	Maximum: RH80%; RH90%
Dimensions	118(L) x 58(H) x 62(W)mm	
Net Weight	400g	

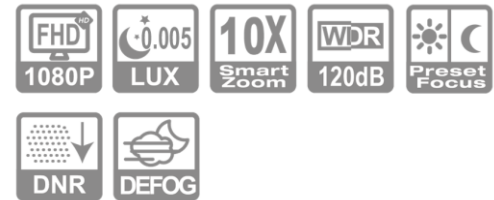

Dimensions

Tol: ±0.5 Unit: mm

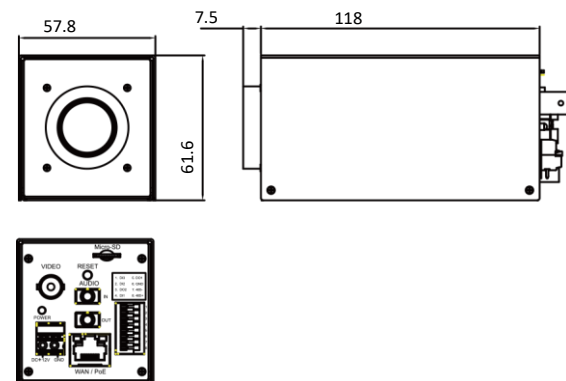

Options

*Specifications are subject to change without notice. 14H3_v03_180515