

SAC-WD3202OC-IIa

One Cable 1080P AHD Bullet Camera

- Full HD 1920x1080P@25/30fps (AHD)
- 1/3" Sony 2.2M Exmor CMOS Sensor
- Color: 0.1 Lux, B/W: 0.06 Lux
- Smart DNR, Fog Reduction
- OSD / CoC (Via the coax)
- Standard: AHD; Optional: AHD and CVBS Dual Output




AHD Camera

Video	Image Sensor	1/3" Sony 2.2M Exmor CMOS Sensor
	Video Frame Rate (Maximum)	1920x1080P@25/30fps, 1280x720P@30fps
	Minimum Illumination	Color: 0.1 Lux, B/W: 0.06 Lux
	Video Output	Standard: AHD; Optional: AHD and CVBS Dual Output
	Mechanical IR Cut Filter (ICR)	N/A
Function	IR LED; Working Distance (Meter)	N/A
	OSD Menu	OSD / CoC (Via the Coax)
	Day & Night Mode	Color / B&W / External
	Auto Electronic Shutter	1/25(30) ~ 1/30, 000 Sec; Flickerless
	Manual Electronic Shutter	1/25(30), 1/50(60), 1/100(120), 1/240, 1/500, 1/1000, 1/2000, 1/4000, 1/8000, 1/16000, 1/30000 Sec
	White Balance	ATW / AWB / PWB(Push Lock) / Manual
	WDR; BLC; HLC	DWDR / Middle / Low / Off ; Program ; On / Off
	Fog Reduction	Auto / Manual / Off ; Level: High / Middle / Low
	Dynamic Noise Reduction	High / Middle / Low / Off
	Language	English, Japanese, Traditional Chinese, Simplified Chinese mage Effects
General	Image Setting	Sharpness / Mirror / Flip
	Privacy Zone Mask	16 Zones Programmable
	Automatic IRIS; Connector	DC Iris
	Lens	N/A
	Water Resistance; Max. Breaking Strength	N/A
	Power Supply; Consumption	PoC Only: 2W
	Operation; Storage Temp.	-10°C ~ 50°C; -20°C ~ 60°C
	Operation; Storage Humidity	Maximum: RH80%; RH90%
	Dimensions	124(DIA)x102mm
	Net Weight	320g



Dimensions

Tol: ±0.5 Unit: mm

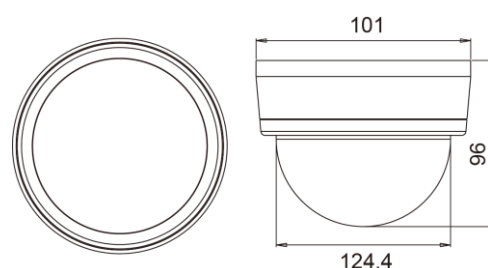

Options



MCU-UTC001AHD
UTC Controller

HD One Cable Power Supply Unit



MOP-UL114C
(5W/CH, 4CH)
PoC Device



MOP-UL118C
(5W/CH, 8CH)
PoC Device

*Specifications are subject to change without notice. 06L1_171211