


AHD 1080P STAVRIS Smart Duo-Light Bullet Camera

- 1920x1080P@25/30fps (AHD)
- 1/2.9" Sony 2.1 M STARVIS Sensor
- Color: 0.1Lux, B/W: 0.05Lux@F2.0 , IR On: 0 Lux
- Smart Duo-Light, IR and White LEDs Switching by Smart Detection in Night Time
- Smart DNR, 3D / 2D DNR, Sense up, Fog Reduction
- True WDR up to 90dB, Window WDR, D-WDR
- Support CoC / UTC / PELCO-D Multi-Coaxial Control Protocol
- OSD / CoC (Via the coax)
- Mechanical IR Cut Filter (ICR)
- Video Output: AHD or CVBS (Composite) via OSD Setting (TVI or CVI Optional)


STARVIS
**AHD, TVI, CVI & CVBS
4 in 1**


AHD/TVI/CVI Camera

Video	Image Sensor	1/2.9" Sony 2.1M STARVIS Sensor
	Video Frame Rate (Maximum)	1920x1080P@25/30fps
	Minimum Illumination	Color:0.1Lux, B/W:0.05Lux@F2.0, IR On: 0 Lux
	Wide Dynamic Range	90dB
	Video Output	Video Output, AHD or CVBS (Composite) via OSD Setting. TVI or CVI Output Optional
	Mechanical IR Cut Filter	Yes
	Audio	N/A
	White Light LED/ IR LED; Working Distance	4pcs Hi-Power White Light LEDs, 24pcs Hi-Bright OSRAM IR LEDs ; White LED: 10 M, IR LEDs: 20 M
Function	OSD Menu	OSD Control / CoC (Via the coax)
	Day & Night Mode	Color / B&W / Auto / IR Sync
	Auto Electronic Shutter	1/25(30)~1/30, 000 sec;
	White Balance	ATW / AWB / PWB (Push Lock) / Manual
	WDR; BLC; HLC	High (Max 90dB) / Middle / Low / Off; Program; On / Off; Window WDR, D-WDR
	Fog Reduction	Auto / Manual / Off ; Level: High / Middle / Low
	Dynamic Noise Reduction	High / Middle / Low / Off
	Sense Up	On (x2, x4, x8, x16, x32) / Off
	Language	English, Japanese, Traditional Chinese, Simplified Chinese
	IR / White LEDs Switch	Night Time Normal: IR Light Auto Switching to White Light by Smart Detection
	Image Setting	Sharpness / Mirror / Flip
	Privacy Zone Mask	16 Zones Programmable
	Motion Detection	On: Sensitivity, Programmable / Off
	Lens	Standard: f3.6mm
General	Lens Option	f6.0mm fixed focal lens
	Water Resistance	IP66
	Power Supply; Consumption	12Vdc@400mA (4.8W, Max)
	Operation; Storage Temp.	-10°C ~ 50°C; -20°C ~ 60°C
	Operation; Storage Humidity	Maximum: RH80%; RH90%
	Dimensions	85.5x 92.5 x 315 mm
	Net Weight	810g

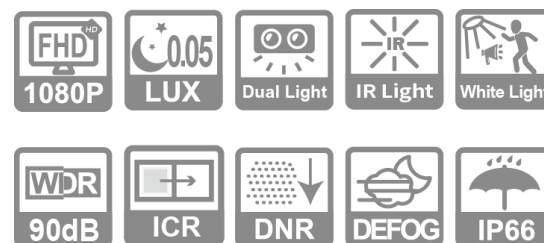

Dimensions

Tol: ±0.5 Unit: mm

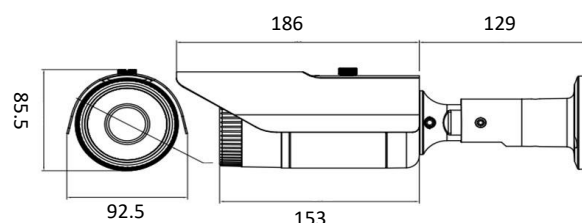

*Specifications are subject to change without notice. 17S1_v10_181211