

HZC-WDL327MZ

AHD/TVI/CVI 2M 3.5X Easy Zoom

Full HD 1080P AHD/TVI/CVI 3.5X Easy Zoom Camera

- 1/3" Sony 2.2M Exmor CMOS Sensor
- Color: 0.1 Lux, B/W: 0.06 Lux, IR On: 0 Lux @F1.6
- AHD/TVI/CVI or CVBS Signal output available via setting OSD menu
- Support Multi-CoC Protocol mapping for major AHD/TVI/CVI DVRs
- Built-in f3.0~10.5mm Zoom Lens makes zoom & focus adjustment easy
- Auto Focus works when Day/Night mode switches
- Window WDR & True WDR up to 90dB achieves proper exposure for the best result of images
- Adjustable LED light level available with the help of IR Optimizer
- Lens Shading Compensation: Corners are brightened without affecting brightness in the center
- Transmission distance compensation



AHD, TVI, CVI & CVBS
4 in 1


AHD/TVI/CVI Camera

Video	Video System	PAL / NTSC Selectable
	Image Sensor	1/3" Sony 2.2M CMOS Sensor
	Resolution	1920(H)x1080(V)
	Frame Rates	1920x1080P@25/30fps
	Minimum Illumination	Color: 0.1 Lux, B/W: 0.06 Lux, IR On: 0 Lux @F1.6
	Wide Dynamic Range	90dB
	FHD Video Output	AHD / TVI / CVI 1080P or CVBS via OSD Switchable
	Analog Video Output	Available via OSD Switchable
	Signal to Noise Ratio	More than 50dB (AGC off)
	Audio	N/A
	Mechanical IR Cut Filter	Automatically Switches (Switching Lux Level can be adjusted)
	IR LED; Working Distance (Meter)	24pcs LEDs, 12-15M
Function	OSD Menu	OSD Control / CoC + UTC
	Title	Title (Location)
	Day & Night Mode	Color / B&W / Auto / IR SYNC
	Electronic Shutter	Auto: 1/25(30)~1/30, 000 Sec, Manual: 1/25(30), 1/50(60), 1/100(120), 1/240, 1/500, 1/1000, 1/2000, 1/4000, 1/8000, 1/16000, 1/30000 Sec
	Auto Gain Control	0~20 Steps
	White Balance	ATW / AWB / PWB (Push Lock) / Manual
	WDR; BLC; HLC	High (Max 90dB) / Middle / Low / Off; Program; On / Off
	Flickerless	N/A
	Fog Reduction	Auto / Manual / Off; Level: High / Middle / Low
	Dynamic Noise Reduction	High / Middle / Low / Off
	Sense Up	On (x2, x4, x8, x16, x32) / Off
	Digital Image Stabilizer	N/A
	Language	English, Japanese, Traditional Chinese, Simplified Chinese
	Image Setting	Sharpness / Mirror / Flip
	Privacy Zone Mask	16 Zones Programmable
General	Motion Detection	On: Sensitivity, Programmable / Off
	Camera Control Interface	Support CoC / UTC and AHD-C, Hikvision-C, CVI & PELCO-D Protocol
	Lens	3.5X Optical Zoom f3.0mm(Wide)~10.5mm(Tele), F1.6
	Angle of View	H: 92°(Wide) ~ 29°(Tele), V: 52°(Wide) ~ 16.5°(Tele)
	Minimum Working Distance	1 Meter
	Focusing System	Auto Focus; Day / Night Switch Re-Auto Focus
	Water Resistance	IP66
	Power Supply; Consumption	12Vdc/650mA; 7.8W
	Operation; Storage Temp.	-10°C ~ 50°C; -20°C ~ 60°C
	Operation; Storage Humidity	Maximum: RH80%; RH90%
	Dimensions	133(DIA) x 101mm
	Net Weight	650g



Dimensions

Tol: ±0.5 Unit: mm

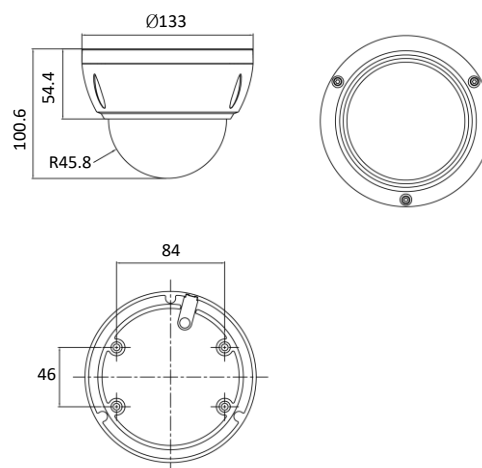

Options



MCU-UTC001AHD
UTC Controller



SSR-AM21
AHD Converter



MTB-423
Bracket

*Specifications are subject to change without notice. _1541_v02_181211