

SZC-HD8110

EX-SDI Starlight Full HD 1080P WDR PoC Speed Dome

- EX-SDI 1920 (H) x 1080 (V) Zoom Camera
- 1/2.8" Sony 2.1M STARVIS CMOS Sensor
- Color: 0.02Lux@F1.6, B/W: 0.005Lux@ F1.6
- Optical 10X Zoom: f5-50mm / F1.6
- Push AF & Auto IRIS Zoom Lens
- OSD Menu Control (CoC)
- Powerful WDR & Anti-Headlight (HLC)
- Fog Reduction & 3D/2D Noise Reduction
- Power over Cable Supply System




Video	Video System	PAL / NTSC Selectable
	Image Sensor	1/2.8" Sony 2.1M STARVIS CMOS Sensor
	Resolution	1920(H) x 1080(V)
	Frame Rates	1920 x 1080P@25/30fps
	Minimum Illumination	Color: 0.02Lux@F1.6, B/W: 0.005Lux@ F1.6
	Wide Dynamic Range	120dB
	FHD Video Output	EX-SDI 1080p
	Analog Video Output	N/A
Function	Mechanical IR Cut Filter	Automatically Switches (Switching Lux Level can be adjusted)
	OSD Menu	CoC Control
	Day & Night Mode	Color / B&W / Auto
	IRIS; Electronic Shutter	Auto Iris; Auto: 1/25(30)~1/30, 000 Sec; Manual: 1/25(30), 1/50(60), 1/100(120), 1/200(240), 1/500, 1/1000, 1/2000, 1/4000, 1/8000, 1/16000, 1/30000 Sec
	Auto Gain Control	Auto (0~20 Steps)
	White Balance	ATW / AWB / PWB(Push Lock) / Manual
	WDR; BLC; HLC	High (Max 120dB) / Middle / Low / Off; Program; On/Off
	Flickerless	PAL 50Hz / NTSC 60Hz / Off
	Fog Reduction	Auto / Manual / Off; Level: High / Middle / Low
	Dynamic Noise Reduction	Smart DNR / 3D & 2D (High / Middle / Low / Off)
	Sense Up	On (x2, x4, x8, x16, x32) / Off
	Language	English, Japanese, Traditional Chinese, Simplified Chinese
	Image Setting	Sharpness / Mirror / Flip
	Privacy Zone Mask	16 Zones Programmable
	Motion Detection	On: Sensitivity, Programmable / Off
Control	Auto Trace	8 Groups (accommodates preset #1~#16)
	Home Function	Yes
	System Memory	Yes
	Panning Rang & Speed	360° Continuous; 40° / sec.
	Tilt Rang & Speed	0°~90° (Mechanical Rotate); 20° / sec.
	Preset Positions	128 Positions
General	Focusing System	Manual / Push AF
	Camera Control Interface	CoC (Pelco D)
	Lens	10X Optical Zoom, f5mm (Wide)~50mm(Tele), F1.6
	Angle of View	Pan: 54°(Wide)~4.9°(Tele); Tilt: 31°(Wide)~4°(Tele)
	Minimum Focus Distance	0.1m(Wide)~1m(Tele)
	Maximum Transmission Distance	250m Via 5C-FB or 5C-2V (Single core copper wire ,168 series copper mesh)
	Water Resistance	N/A
	Power Supply; Consumption	DC Jack: 12Vdc; 8.4W(Max)
	Operation; Storage Temp.	-10°C ~ 50°C; -20°C ~ 60°C
	Operation; Storage Humidity	RH80%; RH90%
	Dimensions	140 x 135mm
	Net Weight	950g



Dimensions

Tol:±0.5Unit:mm

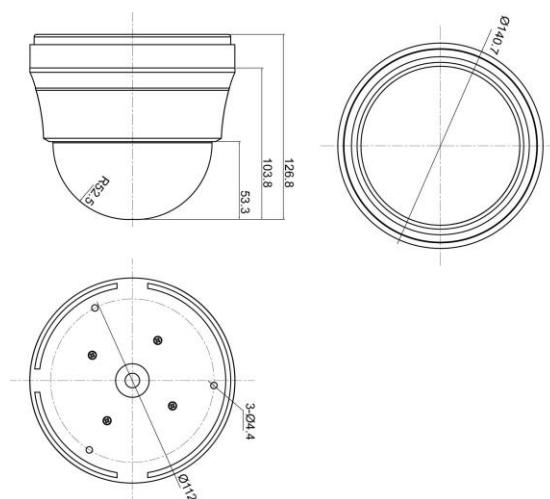

Option



MTB-413
Wall-Mount
(Outdoor)

*Specifications are subject to change without notice. 1082_v01_190214