

SNC-LHA6210MD-3C

1080P 2M 10X Zoom Darklight LPR (ITS) Camera

- 1920 (H) x 1080 (V)@25/30fps 10X Zoom Camera
- 1/2.8" Sony 2.1M 2nd Generation STARVIS Sensor (Darklight Level)
- Color: 0.01Lux@F1.6, B/W: 0.005Lux@F1.6, IR On: 0Lux@F1.6
- Optical 10X (f5~50mm) AF, F1.6 Zoom Lens, and Digital Zoom 8X
- Programmable Self-Defined Max. and Min. Shutter Speed Range
- Smart DNR, 3D / 2D DNR, Sense up, Fog Reduction
- Super WDR 120dB & Anti-Headlight (HLC)
- 12pcs Hi-Power Array LED up to 80 Meter & LED light level Adjustable
- Dual Fan and Temperature Control On/Off
- Day/Night Switch Re-auto Focus or Preset Focus

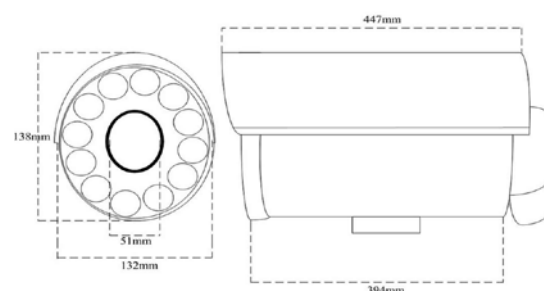
Darklight


10X Zoom
SNC-HD6211MDZ-3C

Video	Image Sensor	1/2.8" Sony 2.1M 2nd Generation STARVIS Sensor (Darklight Level)
	Video Frame Rate (Maximum)	1920x1080p@50/60fps, 1280x720p@60fps
	Video Compression	H.265: Main Profile / H264:Baseline / Main Profile / High Profile/MJPEG
	Minimum Illumination	Color: 0.01Lux@F1.6, B/W: 0.005Lux@F1.6 IR On: 0Lux@F1.6
	Wide Dynamic Range	120dB
Function	IR LED ; Working Distance (Meter)	12pcs Hi-Power Array LEDs (Ø22), up to 80 meter & LEDs Light Level Adjustable
	Day & Night	Day / Night: Auto Smart On, On, Off Programmable
	Auto Electronic Shutter	Auto 1/25(30)~1/30,000 sec; Flickerless
	Manual Electronic Shutter	1/25(30), 1/50(60), 1/100(120), 1/150 (180), 1/200 (1/ 240), 1/450, 1/500, 1/600, 1/750, 1/1000, 1/1500, 1/2000, 1/4000, 1/8000, 1/16000, 1/30000 sec
	Sense up	On (x2, x4, x8, x16, x32) / Off
	White Balance	AWB / ATW / PWB(Push Lock) / Manual
	WDR & BLC Functions; HLC	HWDR; WDR; BLC; LWDR
	Fog Reduction	Auto / Manual / Off; Level: High / Middle / Low
	Text Overlap	Support Channel, Date / Time / Bit Rate, Position Adjustable
	Language	English / Japanese / Traditional Chinese / Simplified Chinese
	E-Zoom	1.0X~8.0X (step 0.1)
	Image Setting	Sharpness / Saturation / Gamma / Black Level / Mirror / Flip
	Privacy Zone Masks	4 Zones Programmable
	Motion Detection	On: Sensitivity, Area Program / Off
	Lens Shading Compensation	On / Off
Network	Streaming	CBR, VBR, FIX QP
	DNR	2D/3D: High / Middle / Low / Off; SMART: On / Off
	ROI	4 Zones
	Data Storage	Manual, Auto Cycle, Timing, Alarm Switch, Motion Detection)
	Alarm Trigger	File upload via FTP and e-mail / Notification via e-mail, HTTP
	Protocols	TCP IP, UDP, HTTP, SMTP, FTP, NTP, DNS, DHCP, PPPoE, ARP, UPnP, RTSP, RTP,SNMP, TRAP, Ethernet (RJ-45 Wired 10/100 Base-TX)
	ONVIF Compatibility	ONVIF 2.4 Profile S, CGI
	Browser	IE11.0 or Above (Build in Web Server)
General	Multicast	Support Multicast Function
	Focusing System	Zoom & Auto Focus; Day / Night Focus Preset
	Connector	Audio, RJ45, DC Power, BNC, DI/DO/RS485, Reset Button, Micro SD Slot (Max Support 128GB)
	Automatic IRIS	DC IRIS
	Lens	Optical 10X (f5~50mm) AF, F1.6 Zoom Lens, Digital Zoom 8X
	Angle of view	H: 54°(Wide) ~ 5.0°(Tele), Mini distance of one meter
	Water Resistance	IP66
	Power Supply ; Consumption	AC100-220V; 60W max
	Operation; Storage Temp.	-10°C ~ 50°C; -20°C ~ 60°C
	Operation; Storage Humidity	Maximum: RH80% ; RH90%
	Net Weight	450mm (L) x 140mm (W) x 135mm (H)


Dimensions

Tol: ±0.5 Unit: mm

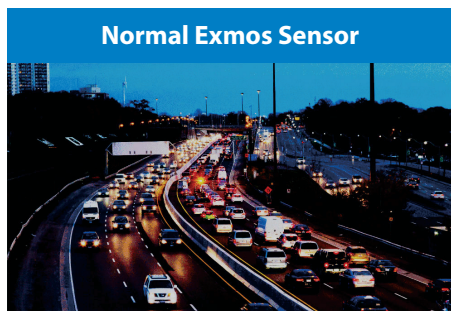

Option

*Specifications are subject to change without notice. LH15L_v05_190314

2M Darklight (H265) Camera

Features

- Latest Darklight Sensor: Used Sony 2ND General STARVIS sensor (Back Illuminated + NIR) that sensitivity increases more than 20% exist STARVIS sensor



- Built-in f5-50mm/F1.6-F1.8 AF optical zoom with day /night Preset function
- Programmable Self-Defined Min. & Max. Shutter Speed Range
- Day / Night AGC, Brightness Setting
- Advance 3D Anti-Strong head light, Noise Reduce & without rolling shutter image

Function



SHANY Advance 3D Noise Reduction



Other Cameras

- Built -in 12pcs Array White LED distance up to 60 Meter & Light level adjustable by Camera OSD
- Dual fan design and temperature control fan on/off
- True WDR up to 120dB
- 3D/2D Noise Reduce & Sensor up
- Auto/Manual Defog



SHANY ELECTRONIC CO., LTD.

4F, No.92, Section 1, Neihsu Road, Neihsu District, Taipei City 114, Taiwan
Tel: +886 2 2659-0071 FAX: +886 2 2658-4626

SHANY