

SNC-HDL6204MDZ

2M Darklight, HDR and 10X Auto-focus Camera

- Full HD 1920x1080P@25/30fps
- 2.1M Sony 2nd Generation STARVIS Sensor (Darklight Level)
- Color: 0.01Lux@F1.6, B/W: 0.005Lux@F1.6, IR On: 0Lux@F1.6
- Optical 10X (f5~50mm) AF, F1.6 Zoom Lens, and Digital Zoom 8X
- Programmable Self-Defined Min. & Max. Shutter Speed Range
- True WDR up to 120dB
- Day/Night Switch Re-auto Focus or Preset Focus
- 2D/3D Smart DNR & Sense up • Fog Reduction Auto/Manual Mode
- Support PoE or DC12V
- IP66 Waterproof

Darklight

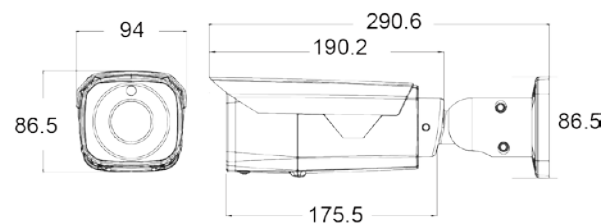

IP Camera

Video	Image Sensor	1/2.8" 2.1M Sony 2nd Generation STARVIS Sensor (Darklight Level)
	Multi-Streaming	Main Stream: 1920 * 1080@25/30fps, 1280*720@25/30fps Sub-Stream: 1920 * 1080@25/30fps, 1280*720@25/30fps, 704*576@25/30fps, 704*480@25/30fps, 352*288@25/30fps, 352*240@25/30fps 3rd Stream: 704*576@25/30fps, 704*480@25/30fps, 352*288@25/30fps, 352*240@25/30fps
	Video Compression	H.265, H.264 & MJPEG, 3 kinds of compressed streaming
	Lens	Optical 10X (f5~50mm) AF, F1.6 Zoom Lens, and Digital Zoom 8X
	Digital Zoom	
	Minimum Illumination	Color: 0.01Lux@F1.6, B/W: 0.005Lux@F1.6, IR On: 0Lux@F1.6
	Wide Dynamic Range	120dB
Function	LEDs; Working Dist.	Hi-Power IR LEDs: 30 M
	ICR	Yes
	Day & Night	Day / Night: Auto Smart On, ON, Off Programmable
	Auto Electronic Shutter	Auto 1/25(30)~1/30,000 sec
	White Balance	AWB / ATW / PWB(Push Lock) / Manual
	WDR & BLC Functions	Off/ HLC / D-WDR / WDR / BLC
	DNR	2D/3D Smart DNR
	Text Overlap	Support Channel, Date/Time/Bit Rate, Position Adjustable
	ROI	4 Zones
Network	Privacy Zone Mask	4 Zones
	Motion Detection	4 Zones
	Bit Rate	32Kbps-20Mbps Supported CBR,VBR & QP
	Intelligent Video (Option)	Support: Defocus & Cover Optional: Scene Change, Direction Detection, Tripwire Detection, Virtual Fence, Loitering, Abandoned Object Detection, Missing Object
	Protocols	TCP/IP, UDP, RTP, RTSP, RTCP, HTTP, DNS, DDNS, DHCP, FTP, NTP, PPPOE, SMTP, UPNP
	ONVIF Compatibility	ONVIF Profile S, CGI
	Alarm Trigger	File upload via FTP and e-mail / Notification via e-mail, HTTP
	Audio In/Out	1 Line in (5V/0.1A) / 1 Line Out
General	Alarm In/Out	1/1
	Day & Night In/Out	N/A
	Memory Slot	N/A
	Water Resistance	IP66
	Max. Breaking Strength	N/A
	Power Supply ; Consumption	DC12V/PoE;12.5W
	Operation; Storage Temp.	-10°C ~ 50°C ; -20°C ~ 60°C
	Operation; Storage Humidity	Maximum: RH80%; RH90%
	Dimension	94(W) x 86.5(H) x 290.6 (L)mm
	Net Weight	1320g
	Others	Anti-Spider web



Dimensions

Tol: ±0.5 Unit: mm



Options

*Specifications are subject to change without notice. v01_18S_191111