

SHC-L251KC

5M AHD/TVI/CVI Hybrid Bullet Camera

- Max 5M@20fps Color Camera
- 1/2.5" 5M CMOS Sensor
- Color: 0.1Lux@F2.0, IR On: 0Lux
- Video Output: 5M, 4M, 1080P or CVBS Switchable
- Digital WDR
- 2D/3D Noise Reduction
- Smart IR




Video	Image Sensor	1/2.5" 5M CMOS Sensor
	Video Frame Rate (Maximum)	5M@20fps
	Minimum Illumination	Color: 0.1Lux@F2.0, IR On: 0Lux
	Video Output	5M@20fps: AHD or TVI, 4M@25/30fps: AHD, TVI, CVI 1080P: AHD, TVI, CVI or CBVS Switchable
	Mechanical IR Cut Filter (ICR)	Yes
	IR LED; Working Distance (Meter)	6pcs Array High Power LEDs ; 15-20M
	S/N Ratio	More Than 50dB (AGC Off)
Function	OSD Menu	Via CoC Control
	Day & Night Mode	Smart IR
	Auto Electronic Shutter	Auto 1/25 (1/30~1/50,000 Sec)
	White Balance	AWB/ATW/AWC
	WDR	D-WDR
	Dynamic Noise Reduction	2D/3D
	Lens Shading Compensation	Yes
	Language	English, Chinese, Russian, Portuguese, Spanish
General	Lens Mount	M12
	Lens, Angle of View	Standard f3.6mm; Optional f6.0mm
	Water Resistance	N/A
	Power Supply; Consumption	12Vdc; 5.5W
	Operation; Storage Temp.	-10°C ~ 50°C; -20°C ~ 60°C
	Operation; Storage Humidity	Maximum: RH80%; RH90%
	Dimensions (mm)	113 (Dia)× 84.8 (H)
	Net Weight	280g



Dimensions

Tol: ±0.5 Unit: mm

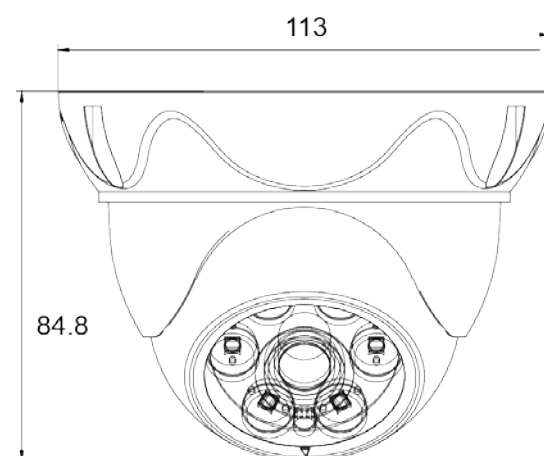

*Specifications are subject to change without notice. 533_v05_190627