

SNC-WDL65033MS

Smart Defog 5.0 Megapixel WDR IP StarLight Fisheye Camera

- 1/1.8" Sony 5.0 Megapixel Progressive Exmor CMOS Sensor
- 2592x1944@30fps ; H.265, H.264, M-JPEG
- Color: 0.001Lux@F1.2, IR On: 0Lux@F1.2
- 3D Noise Reduction to Get More Clear Image
- Various Motion Detection Capability
- Support Multicast Streaming Transmission
- Exclusive Smart Defog function
- Support 12Vdc Power Supply
- Support ONVIF Profile S




Video	Image Sensor	1/1.8" Sony 5.0 Megapixel Progressive Exmor CMOS Sensor
	Video Resolution	2592x1944@30fps, 2560x1920@30fps, 2048x1536@30fps, 1920x1080@30fps, 704x576@30fps, 640x480@30fps, 320x240@30fps
	Video Frame Rate	Listed as above.
	Video Compression	H.265, H.264, M-JPEG
	Minimum Illumination	Color:0.001Lux@F1.2, B/W:0.01Lux@F1.2, IR On: 0Lux@F1.2
	WDR/HDR	80dB
	Video Output	1.0Vp-p Composite, 75Ω (BNC)
	Signal to Noise Ratio (S/N)	More than 52dB (AGC Off)
	Mechanical IR Cut Filter (ICR)	Yes
	IR LED ; Working Distance	3 units ; 10~15m
Function	Menu	Can Be Set Via Browser
	Day&Night Mode	Color / B&W / Auto
	Auto Electronic Shutter	1/25 (30)~ 1/8000 seconds
	Manual Electronic Shutter	1/25(30), 1/50, 1/100, 1/150(60), 1/100(120), 1/150(180), 1/200, 1/250(240), 1/300, 1/400, 1/500, 1/1000, 1/2000, 1/4000, 1/6000, 1/8000 sec.
	White Balance	Auto/Manual
	DNR ; Sense Up	3D DNR ; Yes
	Language	English / Tradition Chinese / Simplified Chinese
	Image Setting	Brightness / Contrast / Saturation / Hue/ Sharpness / Gamma / Auto White / Balance / WDR / Mirror / Rotation / Defog
	Integrated Video Detection	Motion Detection / Sensor Detection / Network Detection
	Timer Clock	Yes
Network	Camera Control Interface	Pelco D, Pelco P, Customer
	Browser	IE 8.0 or Above
	Ethernet	10/100M Auto Negotiation
	Bit Rate	32 up to 16,384 Kbps
	Protocols	TCP IP, UDP, HTTP, SMTP, FTP, NTP, DNS, DHCP, PPPoE, UPnP, RTSP, RTP, Ethernet (RJ-45 Wired 10/100 Base-TX)
	Video Streaming	H.264, H.265 and M-JPEG Dual Streaming
	Audio Broadcast	N/A
	Users	Support 9 Users
	Security	ID/Password Protection
	Alarm Trigger	File Upload via FTP and Email/Notification via Email, HTTP, External Digital Output Activation
General	Multicast	Support Multicast Function
	Connector	RJ45, DC Power, BNC, Reset Button
	Alarm In / Out	N/A
	Automatic IRIS ; Connector	N/A
	Lens Adapter	Built-in Fisheye Lens
	Lens	Built-in Fisheye Lens
	Water Resistance	N/A
	Max. Breaking Strength	N/A
	Power Supply ; Consumption	12Vdc ; 3.4W, LED On: 9W
	Operation ; Storage Temp.	-10°C ~ 50°C ; -20°C ~ 60°C
	Operation ; Storage Humidity	Maximum: RH80% ; RH90%
	Dimensions	120.5(DIA)x68(H) mm
	Net Weight	380g



Dimensions

Tol: ±0.5 Unit: mm

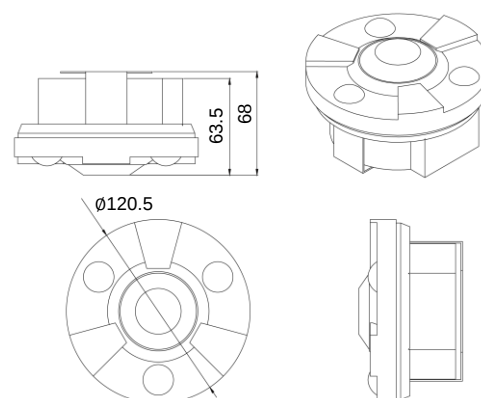

Options

*Specifications are subject to change without notice._Fisheye_20170223.