

SNC-WD2132MS-II

1.3MP Starlight Varifocal


1.3M WDR Starlight IP Indoor Dome

- 1/3" Sony 1.3M Progressive Exmor CMOS Sensor
- 1280x1024@30fps (SXGA) ; H.264, MPEG4, M-JPEG
- Color:0.02Lux@F1.2, B/W:0.005Lux@F1.2, IR On: 0Lux@F1.2
- Smart Auto Defog
- WDR & Light Compensation Functions
- 2D/3D DNR
- Motion Detection
- Two-way Audio & Multicast Support
- Support Micro SD/SDHC Card
- Support 12Vdc/PoE (15W Switch) Power Input
- Support ONVIF Profile S




IP Camera

Video	Image Sensor	1/3" Sony 1.3M Progressive Exmor CMOS Sensor
	Video Resolution	1280x1024@30fps (SXGA) ; 1280x960@30fps, 1280x720@30fps, 720x480@30fps
	Video Frame Rate	Listed as above.
	Video Compression	H.264, MPEG4, M-JPEG
	Minimum Illumination	Color:0.02Lux@F1.2, B/W:0.005Lux@F1.2, IR On: 0Lux@F1.2
	WDR/HDR	Yes
	Video Output	1.0Vp-p Composite, 75Ω (BNC)
	Signal to Noise Ratio (S/N)	More than 52dB (AGC off)
	Mechanical IR Cut Filter (ICR)	Automatically Switches (B/W Mode<2Lux, Color Mode>5Lux); External
	IR LED ; Working Distance (Meter)	N/A
Function	Menu	Can Be Set Via Browser
	Day&Night Mode	Color / B&W / Auto / External
	Auto Electronic Shutter	1/25(30)~1/100(120) sec ; Flickerless
	Manual Electronic Shutter	1/25(30), 1/50(60), 1/100(120), 1/240, 1/500, 1/1000, 1/2000, 1/4000, 1/8000, 1/16000, 1/30000 sec
	White Balance	ATW / AWB / PWB(Push Lock) / Manual
	WDR ; BLC ; DNR	D-WDR / WDR / BLC / HLC ; 2D/3D DNR
	Fog Reduction	Auto/Manual/Off ; Level: High / Middle / Low
	Language	English / Japanese / Traditional Chinese / Simplified Chinese / Russian / Hungarian / German / Persian / Spanish / Polish / Dutch
	Image Setting	Sharpness/Mirror/Flip ; Lens Shading Compensation: On/Off
	Motion Detection	On: Sensitivity, Area Program/Off
	Privacy Zone Masks	12 Zones Programmable (4x3)
	Camera Control Interface	Pelco D, Pelco P, Customer
Network	Browser	IE 9.0 or Above
	Ethernet	10/100M Auto Negotiation
	Bit Rate	64 up to 12,000 Kbps
	Protocols	TCP, UDP, HTTP, SMTP, FTP, NTP, DNS, DHCP, PPPoE, ARP, UPnP, RTSP, RTP
	Video Streaming	H.264, MPEG4 and M-JPEG Dual/Triple Streaming
	Audio Broadcast	Two-way Audio ; G.711 (uLaw), 8KHz/16KHz Sample Rate
	Users	Support 9 Users
	Security	ID/Password Protection
	Alarm Trigger	File Upload via FTP and Email/Notification via Email, HTTP, External Digital Output Activation, micro SD Recording
	Multicast	Support Multicast Function
	Connector	Audio , RJ45, DC Power, BNC, Reset Button, DI/DO/RS485
	Alarm In / Out	DI/DO
General	Automatic IRIS ; Connector	DC
	Lens Adapter	Built-in Varifocal Lens
	Lens	f2.8~12mm
	Water Resistance	N/A
	Max. Breaking Strength	N/A
	Power Supply ; Consumption	12Vdc / PoE (15W Switch) ; 4W
	Operation; Storage Temp.	-10° C ~ 50° C ; -20° C ~ 60° C
	Operation; Storage Humidity	Maximum:RH80% ; RH90%
	Dimensions	140(DIA)x112(H)mm
	Net Weight	500g

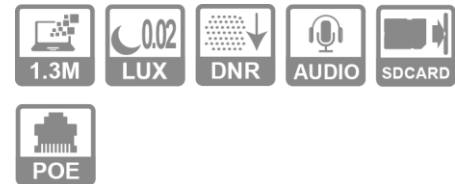

Dimensions

Tol: ±0.5 Unit: mm

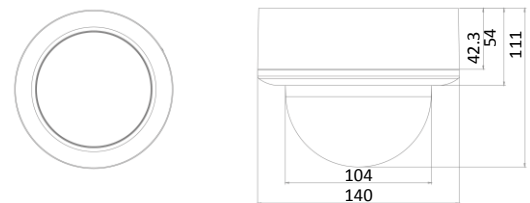

Options



MTB-201
Wall-Mount (Indoor)



MTB-504
Ceiling-Mount

*Specifications are subject to change without notice.1031_2017323.