

SSC-WDL3203EM


- Full HD 1920x1080P@25/30fps
- 1/3" Sony 2.2 Megapixel Progressive Exmor CMOS Sensor
- Color: 0.05Lux@F1.2, B/W: 0.02Lux@F1.2, IR ON: 0Lux@F1.2
- Video output: HD-SDI/EX-SDI
- OSD / CoC(Via the coax/applied on non-PoC model)
- WDR from 2500° K~10000° K
- Smart DNR to prevent image sticking
- WDR Compensation technology more than 90dB
- 0.1x Precision Digital Zoom
- Mechanical IR Cut Filter (ICR)



Video	Image Sensor	1/3" Sony 2.2 Megapixel Progressive Exmor CMOS Sensor
	Video Frame Rate (Maximum)	1920X1080p@25/30fps, 1280x720p@30fps
	Minimum Illumination	Color: 0.05Lux@F1.2, B/W: 0.02Lux@F1.2, IR ON: 0Lux@F1.2
	Wide Dynamic Range	90dB
	Video Output	BNC Connector (HD-SDI/EX-SDI)
	Mechanical IR Cut Filter (ICR)	Yes
	IR LED; Working Distance	30 units ; 10~20m
	Audio	---
Function	OSD Menu	OSD / CoC(Via the coax/applied on non-PoC model)
	Day&Night Mode	Color / B&W / Auto / External
	Auto Electronic Shutter	1/25(30)~1/30, 000 Sec; Flickerless
	Manual Electronic Shutter	1/25(30), 1/50(60), 1/100(120), 1/240, 1/500, 1/1000, 1/2000, 1/4000, 1/8000, 1/16000, 1/30000 Sec
	White Balance	ATW / AWB / PWB(Push Lock) / Manual
	WDR;BLC;HLC	HIGH (Max 90dB) / MIDDLE / LOW / OFF ; Program ; ON/OFF
	Fog Reduction	Auto/Manual/Off; Level: High/Middle/Low
	DNR	HIGH / MIDDLE / LOW / OFF
	Sense up	ON (x2, x4, x8, x16, x32) / OFF
	Language	ENGLISH, JAPANESE, TRADITIONAL CHINESE, SIMPLIFIED CHINESE
	E-Zoom	1.0x~8.0x (step 0.1)
	Image Effects	SHARPNESS / MIRROR / FLIP
	Privacy Zone Masks	18 Zones Programmable
	Motion Detection	ON:sensitivity, programmable /OFF
	Lens Shading Compensation	ON/OFF
General	Automatic IRIS; Connector	DC
	Lens Adapter	Built-in Varifocal Lens
	Lens	f2.8~12mm
	Lens Option	---
	Water Resistance	IP66
	Max. Breaking Strength	656.1kgf
	Power Supply; Consumption	12Vdc: 7.2W, 12Vdc/24Vac: 8.2W, PoC (Option)
	Operation; Storage Temp.	-10° C~50° C ; -20° C~60° C
	Operation; Storage Humidity	Maximum: RH80% ; RH90%
	Dimensions	140(DIA)x112mm
	Net weight	1000g

Dimensions

Tol:±0.5 Unit:mm

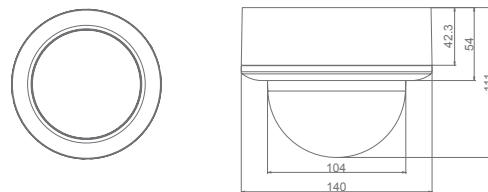

Bracket Options



MTB-413
Wall-Mount



MTB-504
Ceiling Mount

Accessories



SSD-RX010
Receiver



SSD-RX010N
Network Receiver



SSD-RX011
Receiver with PoC



SSD-RX011N
Network Receiver with PoC



SSD-RX041
4ch Receiver with PoC