

SSD-RX081

- SDI Standards HD-SDI(SMPTE 292M) & 3G-SDI(SMPTE 424M)
- Real-time High Quality Digital Video Transmission ; OSD Control
- SDI BNC Input Connector x8, SDI BNC Output Connector x8
- Support SDI/HDMI:
Full HD 1080P@25/30fps
- Unique Power over Coaxial Transmission Technology
- Operate OSD by 5-way button
- Adjust Zoom/Motorized Camera on panel




Dimension

Tol:±0.5 Unit:mm

SDI Standards	HD-SDI (SMPTE 292M), 3G-SDI(SMPTE 424M)
Cable Transmission Distance	HD-SDI 120 meter (Recommend 5C-FB or RG59 Cable)
SDI Input	SDI BNC Input Connector x8
PoC Technology	Video/Power/Control
SDI Resolution	Full HD 1080P@25/30fps
SDI Output	SDI BNC Output Connector x8
HDMI Resolution	Full HD 1080P@25/30fps
HDMI Output	HDMI(1.3a)Type A Connector (Output) x1
Analog Video Output	BNC Connector (1.0Vp-p Composite, 75Ω) x1
Audio Input	Audio In (3.5mm) x1
Audio Output	Audio out (3.5mm) x1
RS-485 Input	RS-485 +/- x1
RS-485 Output	RS-485 +/- x1
DI/DO	Dlx1 / DOx1
Ethernet	NA
Video compression	NA
H.264	NA
Bit Rate Transmission	NA
Power Supply	90~260Vac ; Enable PoC: 24Vdc, Max.12W/per ch
Operating ; Storage Temp.	-10° C~50° C ; -20° C~60° C
Operation ; Storage Humidity	Maximum: RH80% ; RH90%
Dimensions	426(W)x48(H)x274.5(L)mm
Net Weight	4.5Kg

*Specifications are unfixed and do not apply to customized projects. 150912

Diagram

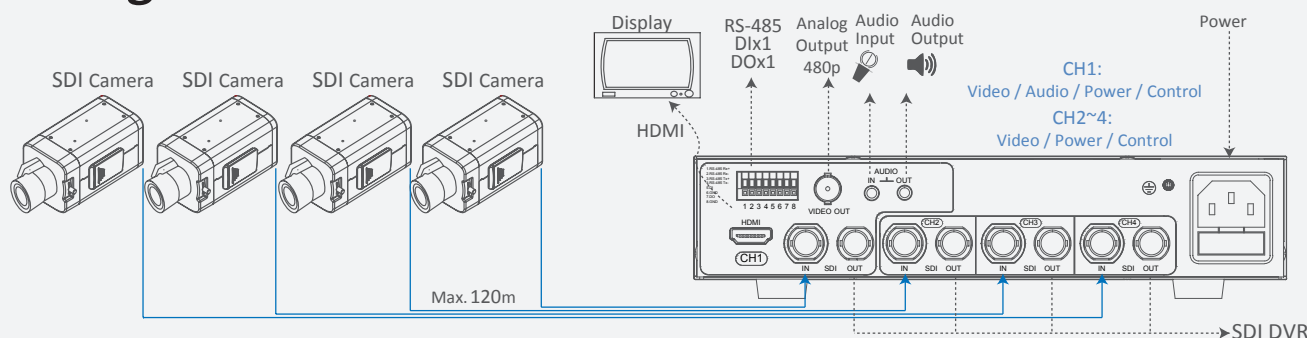

*Specifications are unfixed and do not apply to customized projects. 150912