

SAC-HDL5203MOC

Starlight Full HD 1080P AHD Dome Camera

- Full HD 1920x1080P@25/30fps
- 1/3" Sony 2.1M STARVIS Sensor
- Color: 0.02Lux@F1.2, B/W: 0.005Lux@F1.2, Sense-up:0.001Lux@F1.2, IR On: 0 Lux
- Lens Shading Compensation
- Smart DNR, 3D/2D DNR, Sense Up, Fog Reduction
- True HDR up to 120dB, D-WDR
- 0.1x Step Digital Zoom, Up to 8X
- Transmission Distance Compensation Setting
- Support CoC/UTC/PELCO-D Multi-Coaxial Control Protocol
- OSD / CoC (Via the coax)
- Mechanical IR Cut Filter (ICR)
- Simultaneous Video Output: AHD and CVBS (Composite)



AHD Camera


Video	Image Sensor	1/3" Sony 2.1M STARVIS Sensor
	Video Frame Rate (Maximum)	1920x1080P@25/30fps, 1280x720P@30fps
	Minimum Illumination	0.02Lux@F1.2, B/W: 0.005Lux@F1.2, Sense-up:0.001Lux@F1.2, IR On: 0 Lux
	Wide Dynamic Range	120dB
	Video Output	Simultaneous Video Output, AHD and CVBS (Composite)
	Mechanical IR Cut Filter	YES
	Audio	N/A
Function	IR LED; Working Distance	Standard: 30pcs Hi-Bright, 16~20M Option: 4pcs Hi-Power + 26pcs Hi-Bright, 20~25M
	OSD Menu	OSD Control / CoC (Via the coax)
	Day&Night Mode	Color / B&W / Auto / IR Sync
	Auto Electronic Shutter	1/25(30)~1/30, 000 sec; Flickerless
	Manual Electronic Shutter	1/25(30), 1/50(60), 1/100(120), 1/240, 1/500, 1/1000, 1/2000, 1/4000, 1/8000, 1/16000, 1/30000 Sec
	White Balance	ATW / AWB / PWB (Push Lock) / Manual
	WDR; BLC; HLC	High (Max 120dB) / Middle / Low / Off; Program; On / Off One cable Version without WDR Function
	Fog Reduction	Auto / Manual / Off ; Level : High / Middle / Low
	Dynamic Noise Reduction	High / Middle / Low / Off
	Sense Up	On (x2, x4, x8, x16, x32) / Off
	Language	English, Japanese, Traditional Chinese, Simplified Chinese
	E-Zoom	1.0x~8.0x (Step 0.1)
	Image Setting	Sharpness / Mirror / Flip
	Privacy Zone Mask	16 Zones Programmable
	Motion Detection	On: Sensitivity, Programmable / Off
	Lens Shading Compensation	On / Off
General	Automatic IRIS; Connector	DC
	Lens Adapter	Built-in Varifocal Lens
	Lens	f2.8~12mm
	Lens Option	N/A
	Water Resistance	IP66
	Max. Breaking Strength	IK10
	Power Supply; Consumption	PoC/12Vdc: 7.2W
	Operation; Storage Temp.	-10°C ~ 50°C; -20°C ~ 60°C
	Operation; Storage Humidity	Maximum: RH80%; RH90%
	Dimensions	140(DIA)x112mm
	Net Weight	1000g

*Specifications are subject to change without notice. 0721_20170725



Dimensions

Tol: ±0.5 Unit: mm

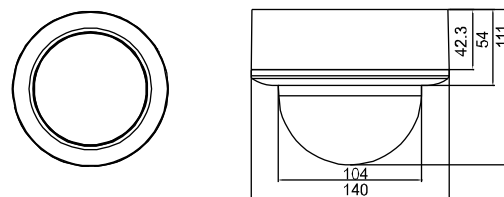

Options



MTB-413
Wall-Mount



MTB-504
Ceiling-Mount

One Cable Options



MOP-UH114S
PoC Device



MOP-UH118S
PoC Device