

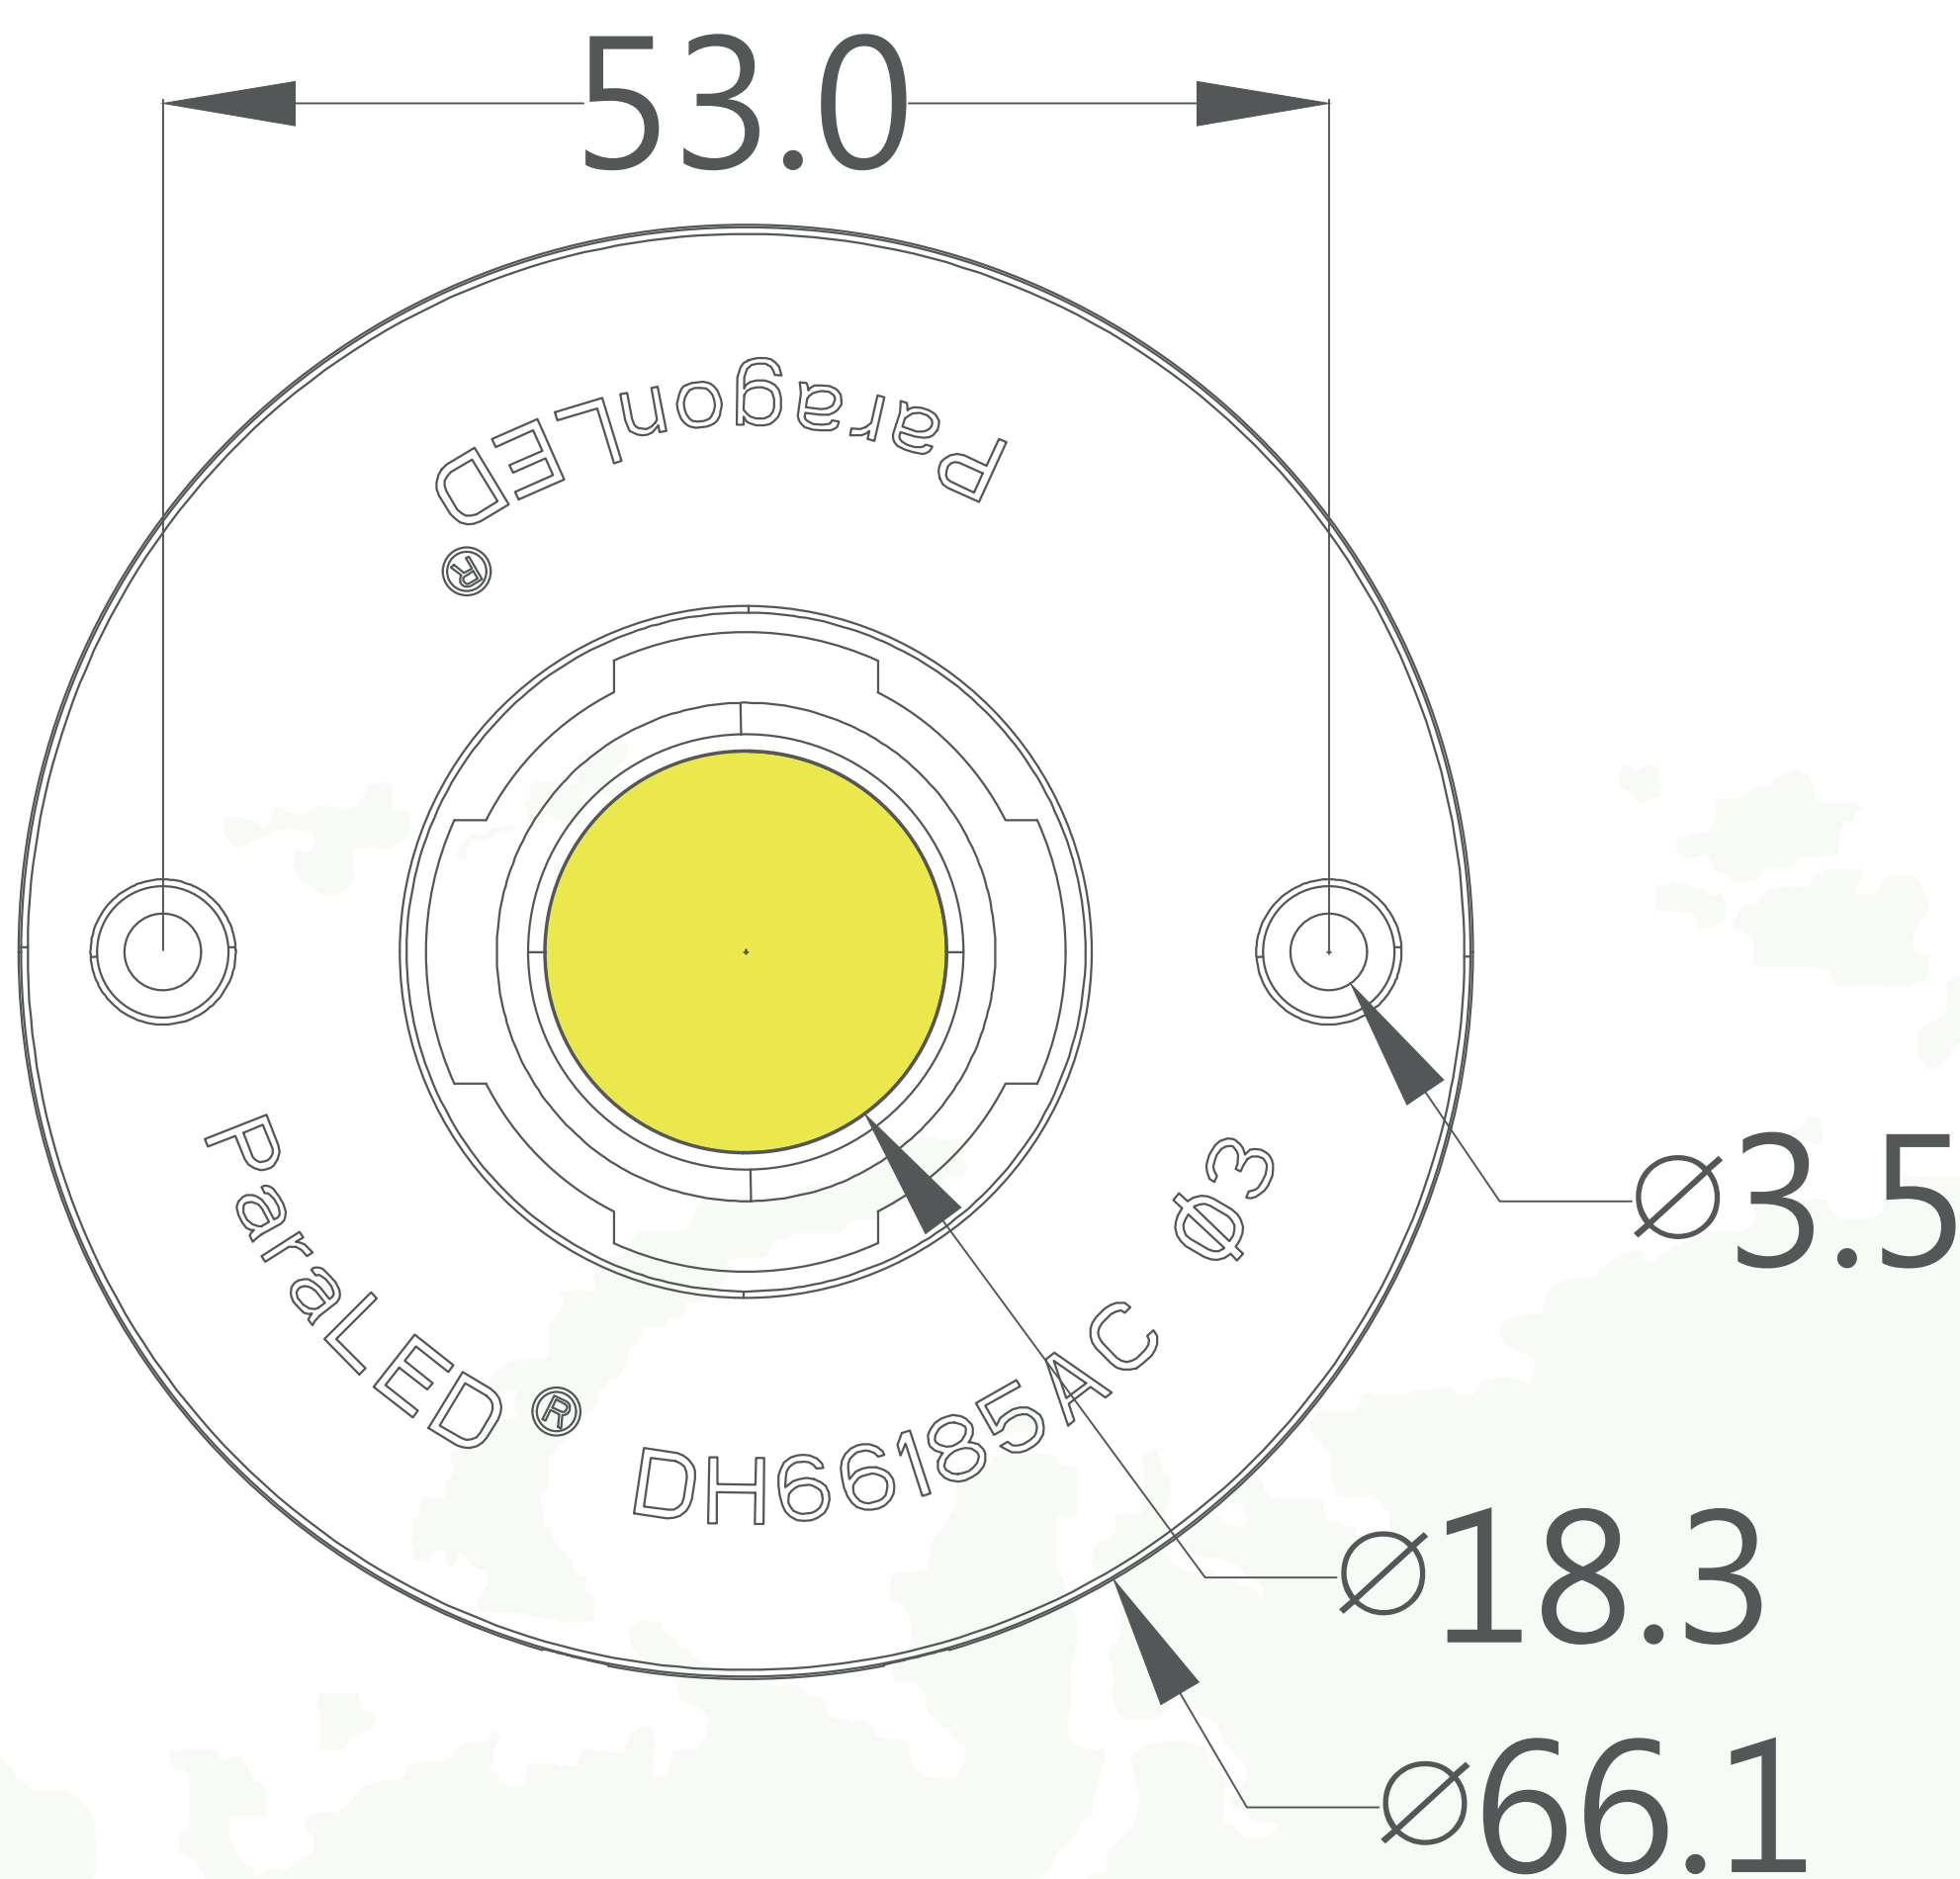


COB / SMD G2.1

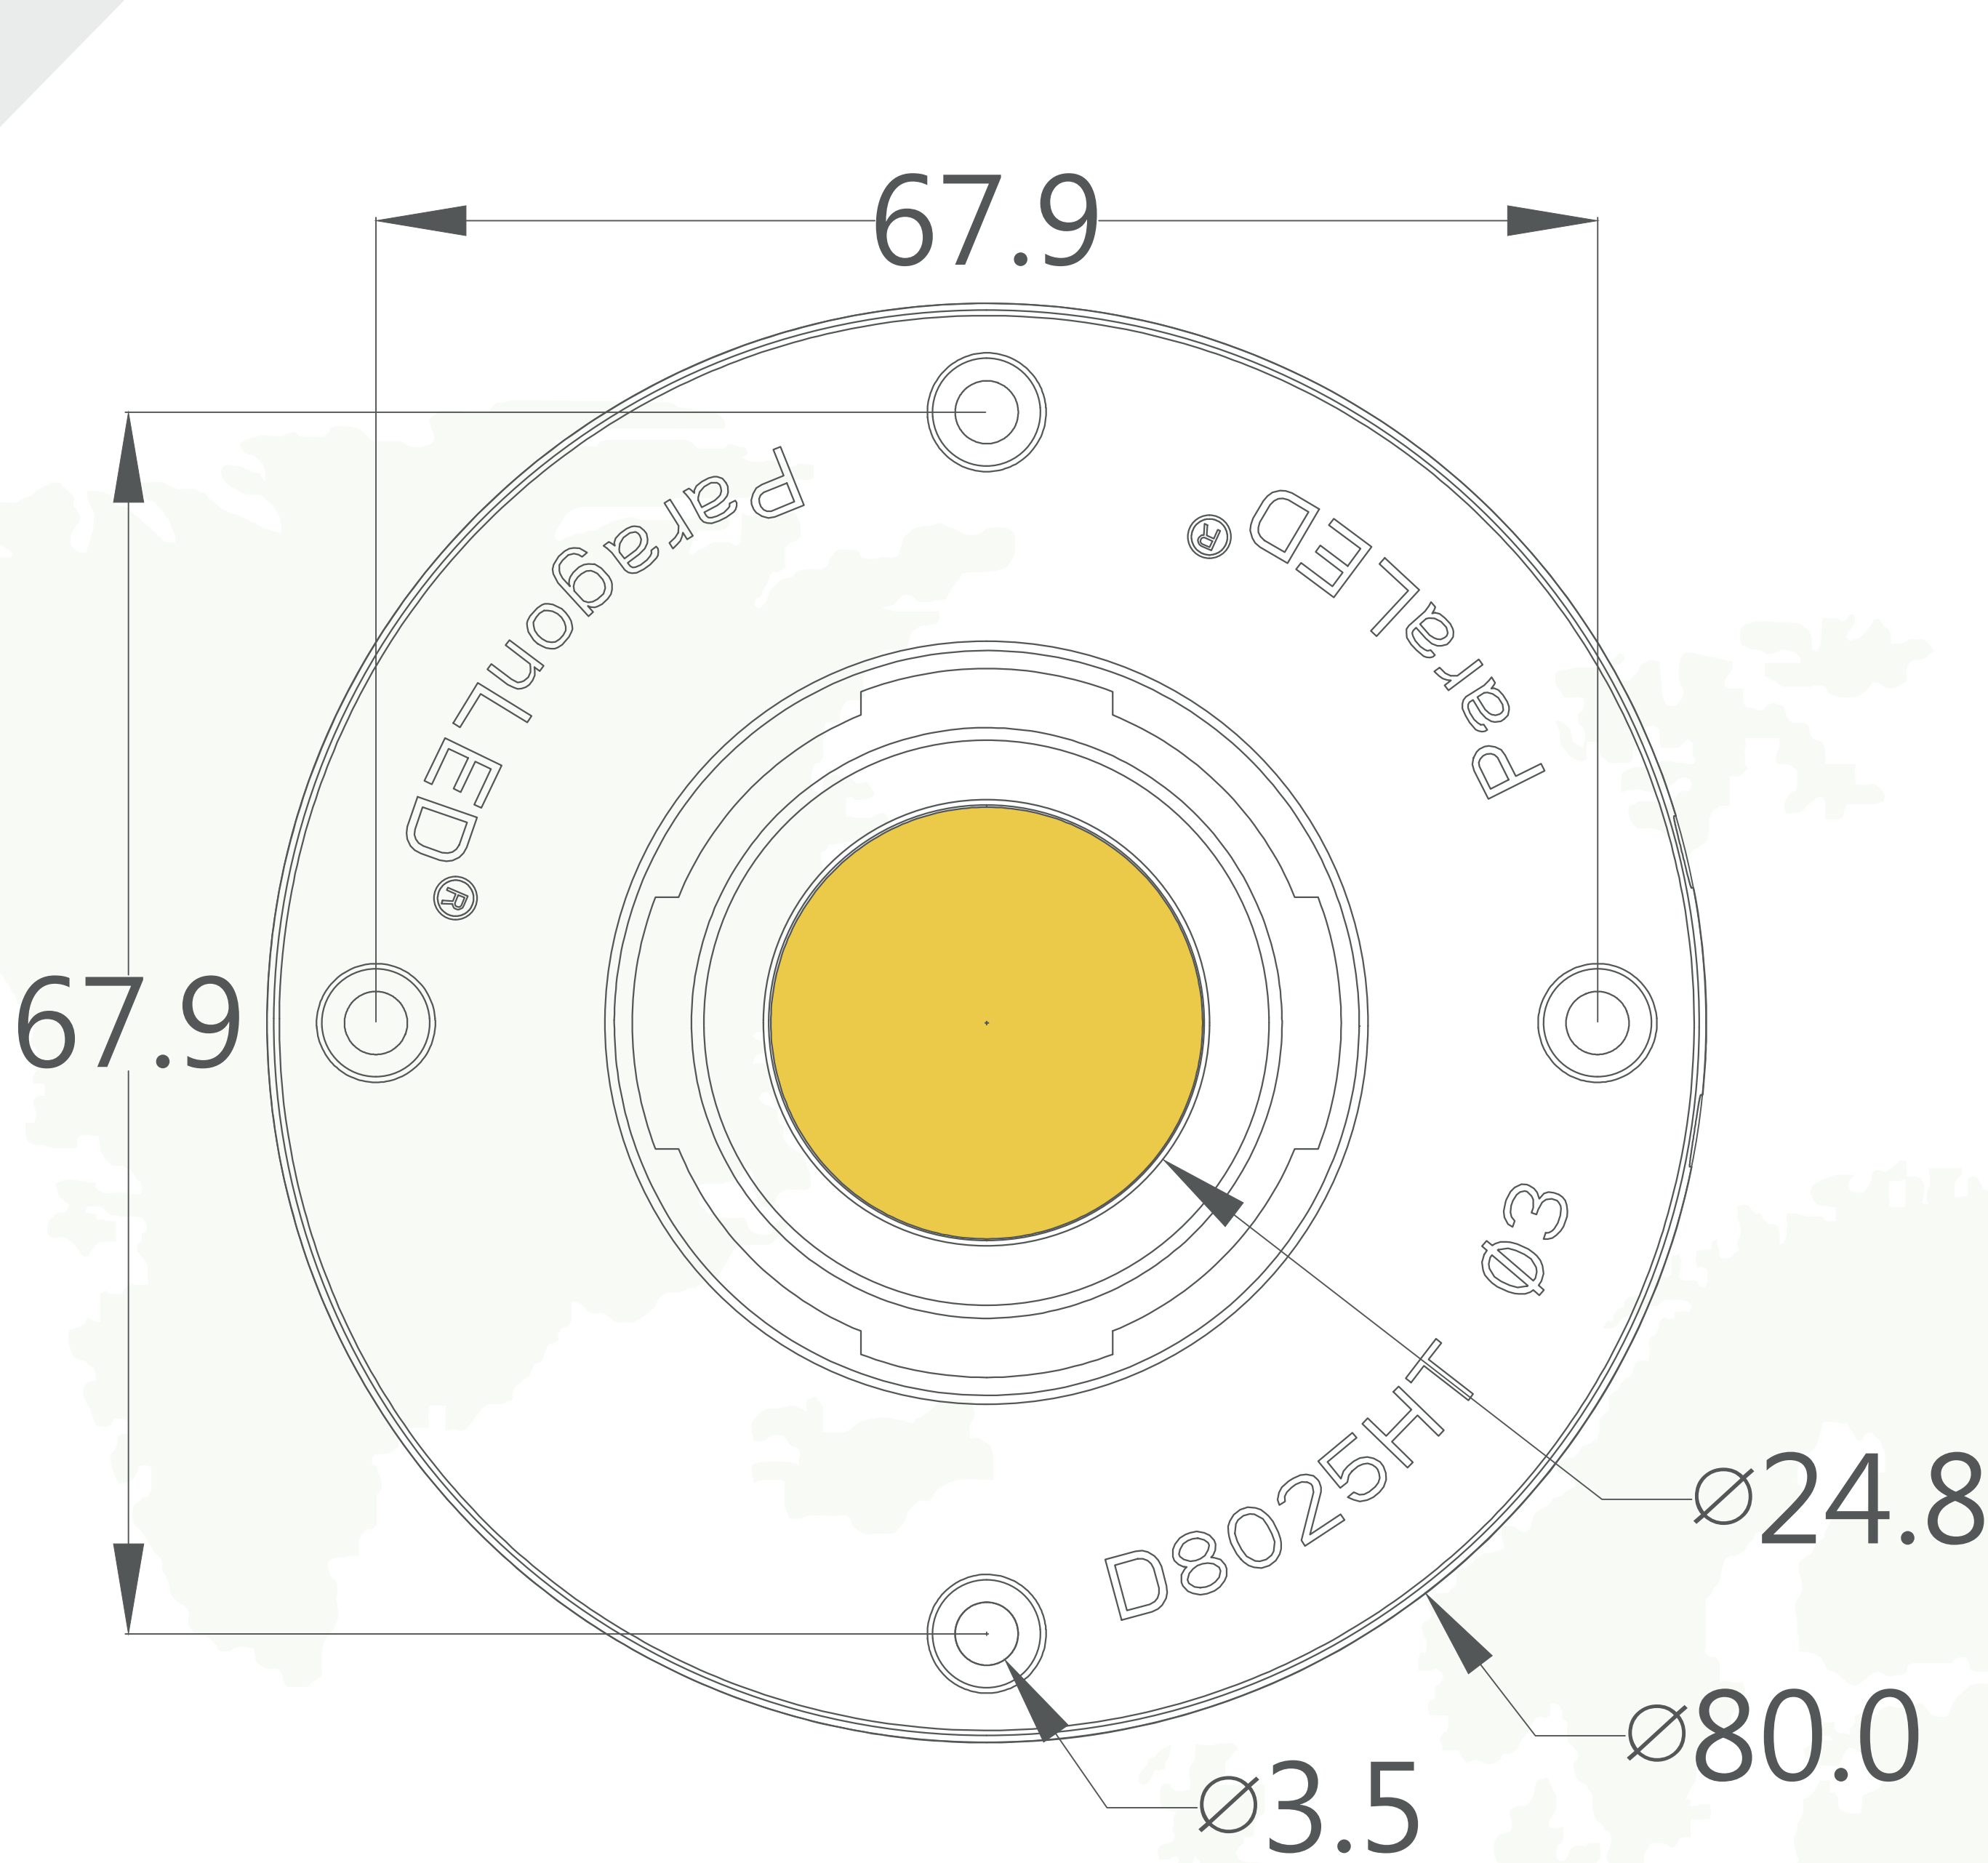

Features

- Dimmable
- Assemble easily
- Easier for luminary design
- LM80 Certificated
- UL E355751

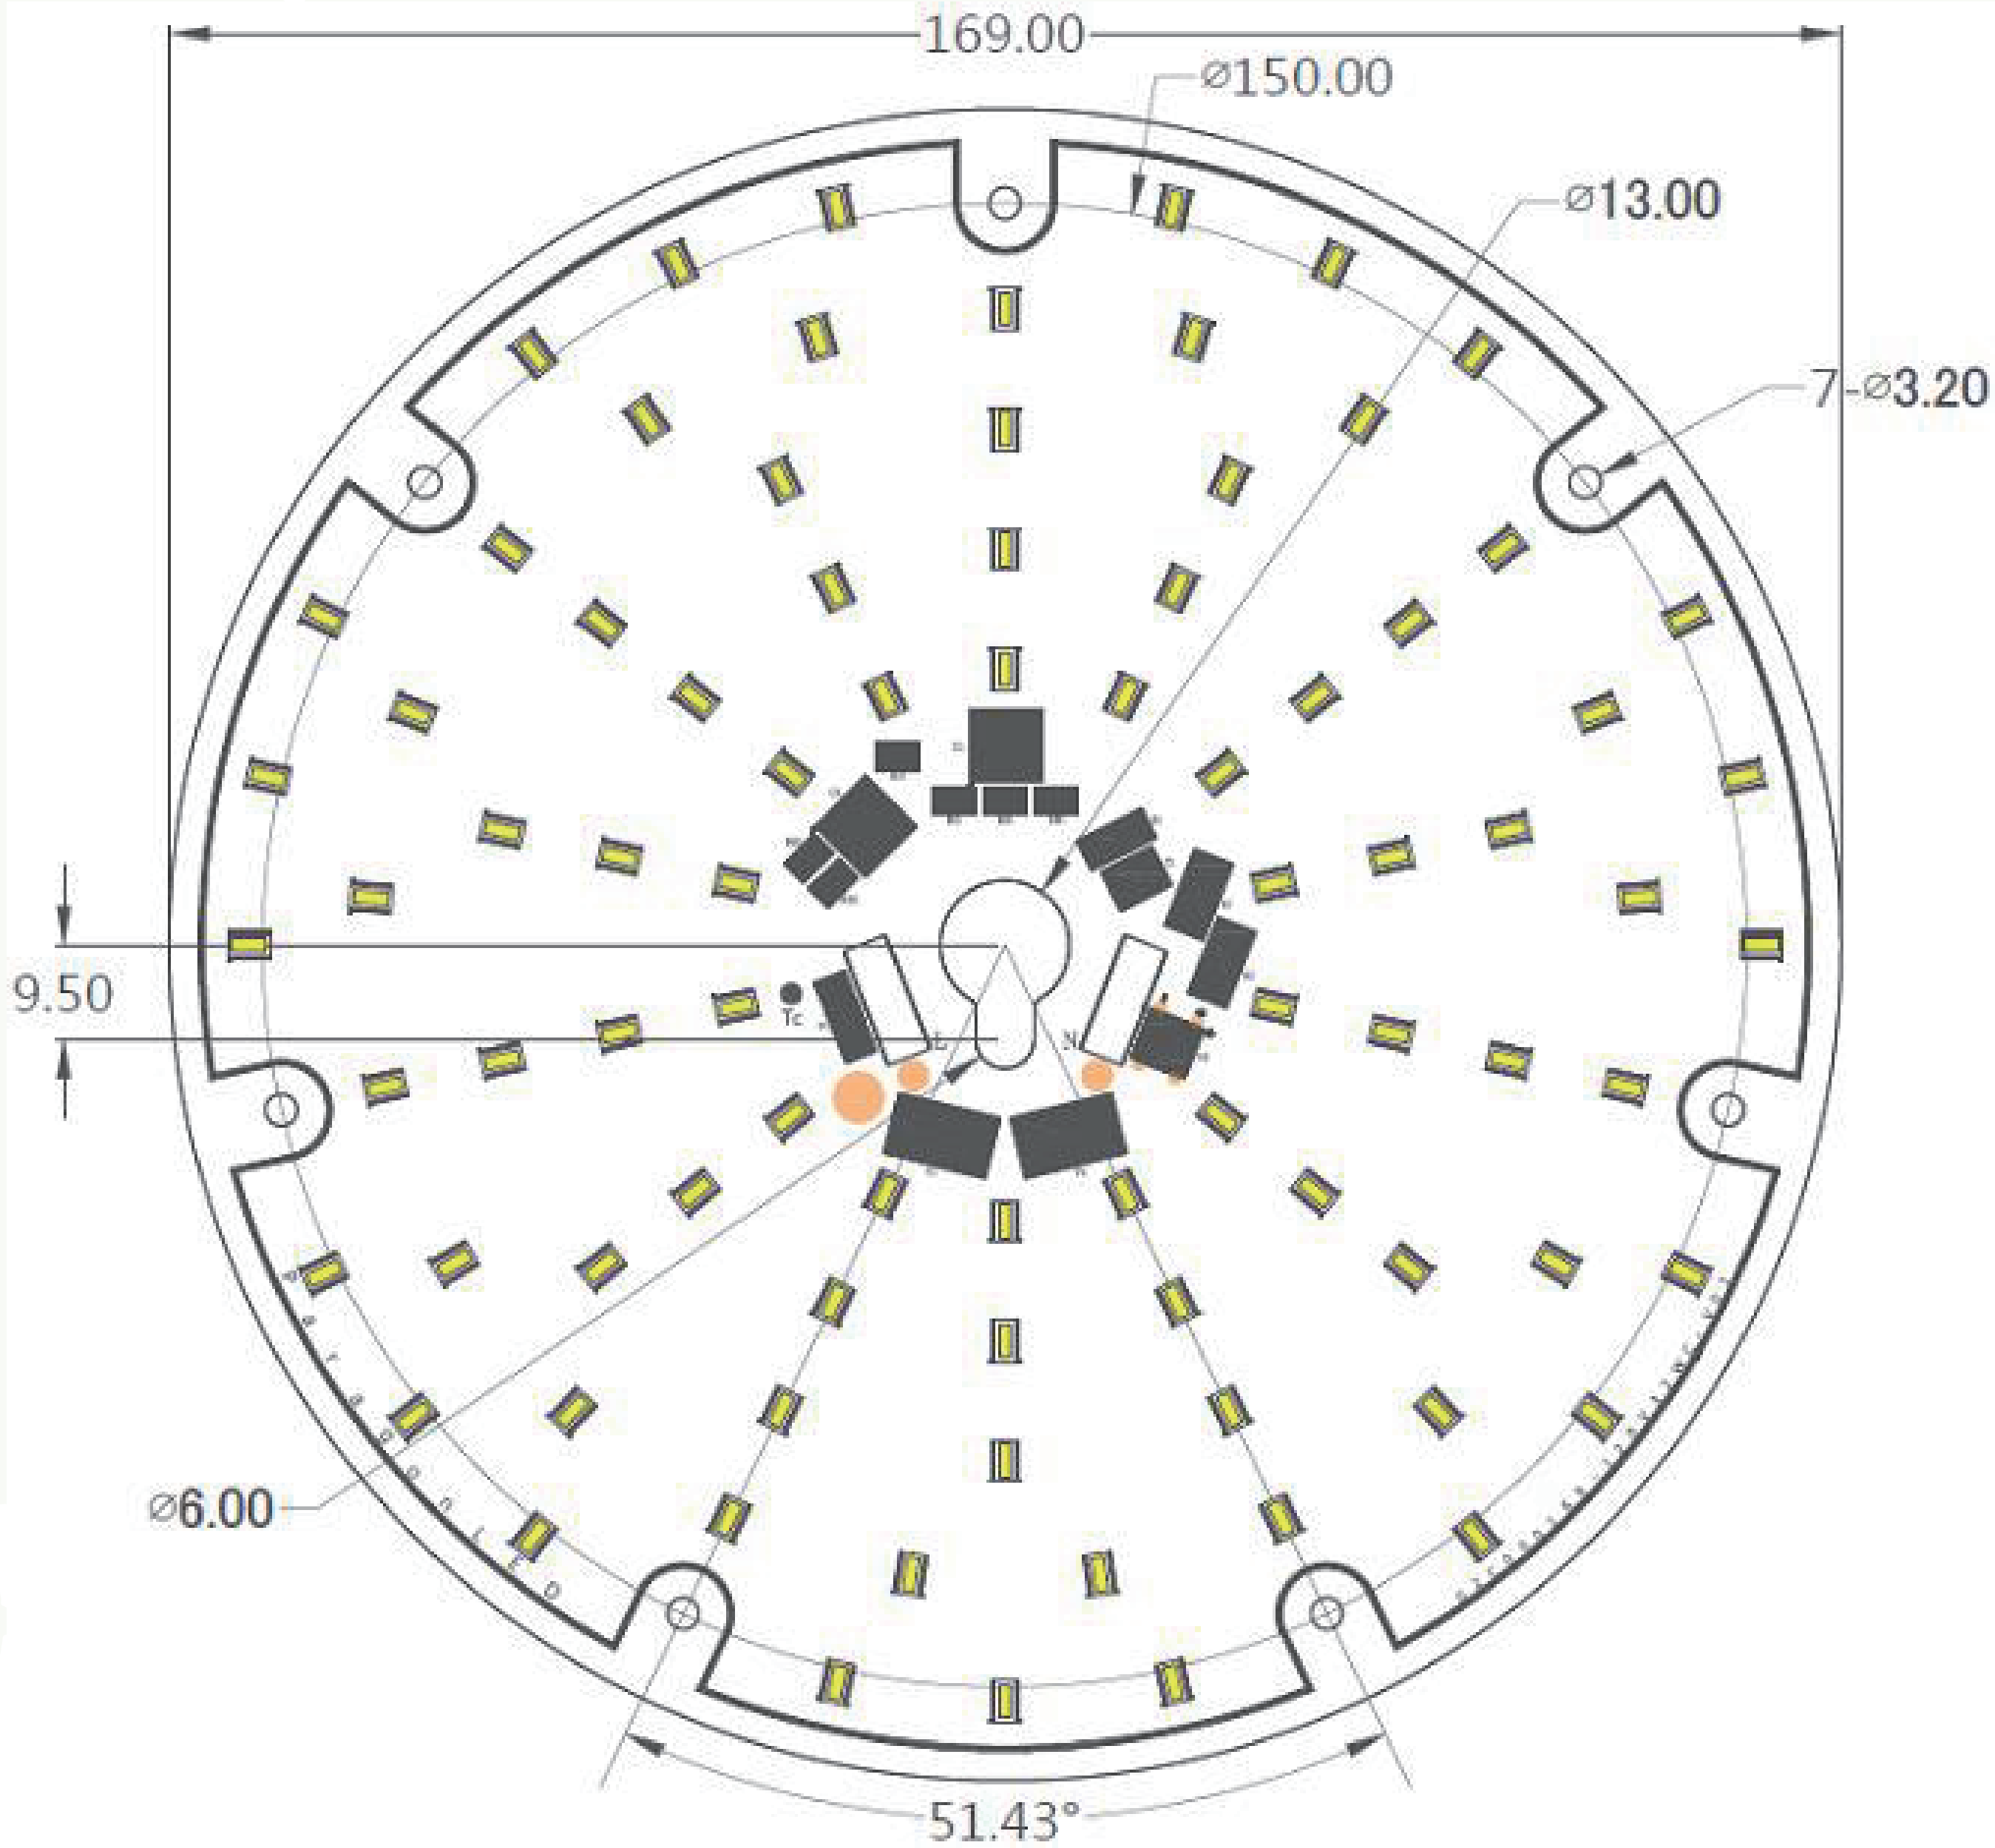

Type	Watts (W)	Dimmable	Volts (V)	Transient Protection (KV)	Lumen	PF	CCT	THD
COB	12	Traic Dimming	120	2.5KV	810	>0.99	3000K	<20%
COB	18	Traic Dimming	120	2.5KV	1215	>0.99	3000K	<20%
COB	24	Traic Dimming	120	2.5KV	1730	>0.99	3000K	<20%
COB	36	Traic Dimming	120	2.5KV	2595	>0.99	3000K	<20%
SMD	12	Traic Dimming	120	2.5KV	950	>0.99	3000K	<20%
SMD	32	Traic Dimming	120	2.5KV	2560	>0.99	3000K	<20%



EN62471

LM80

ErP