
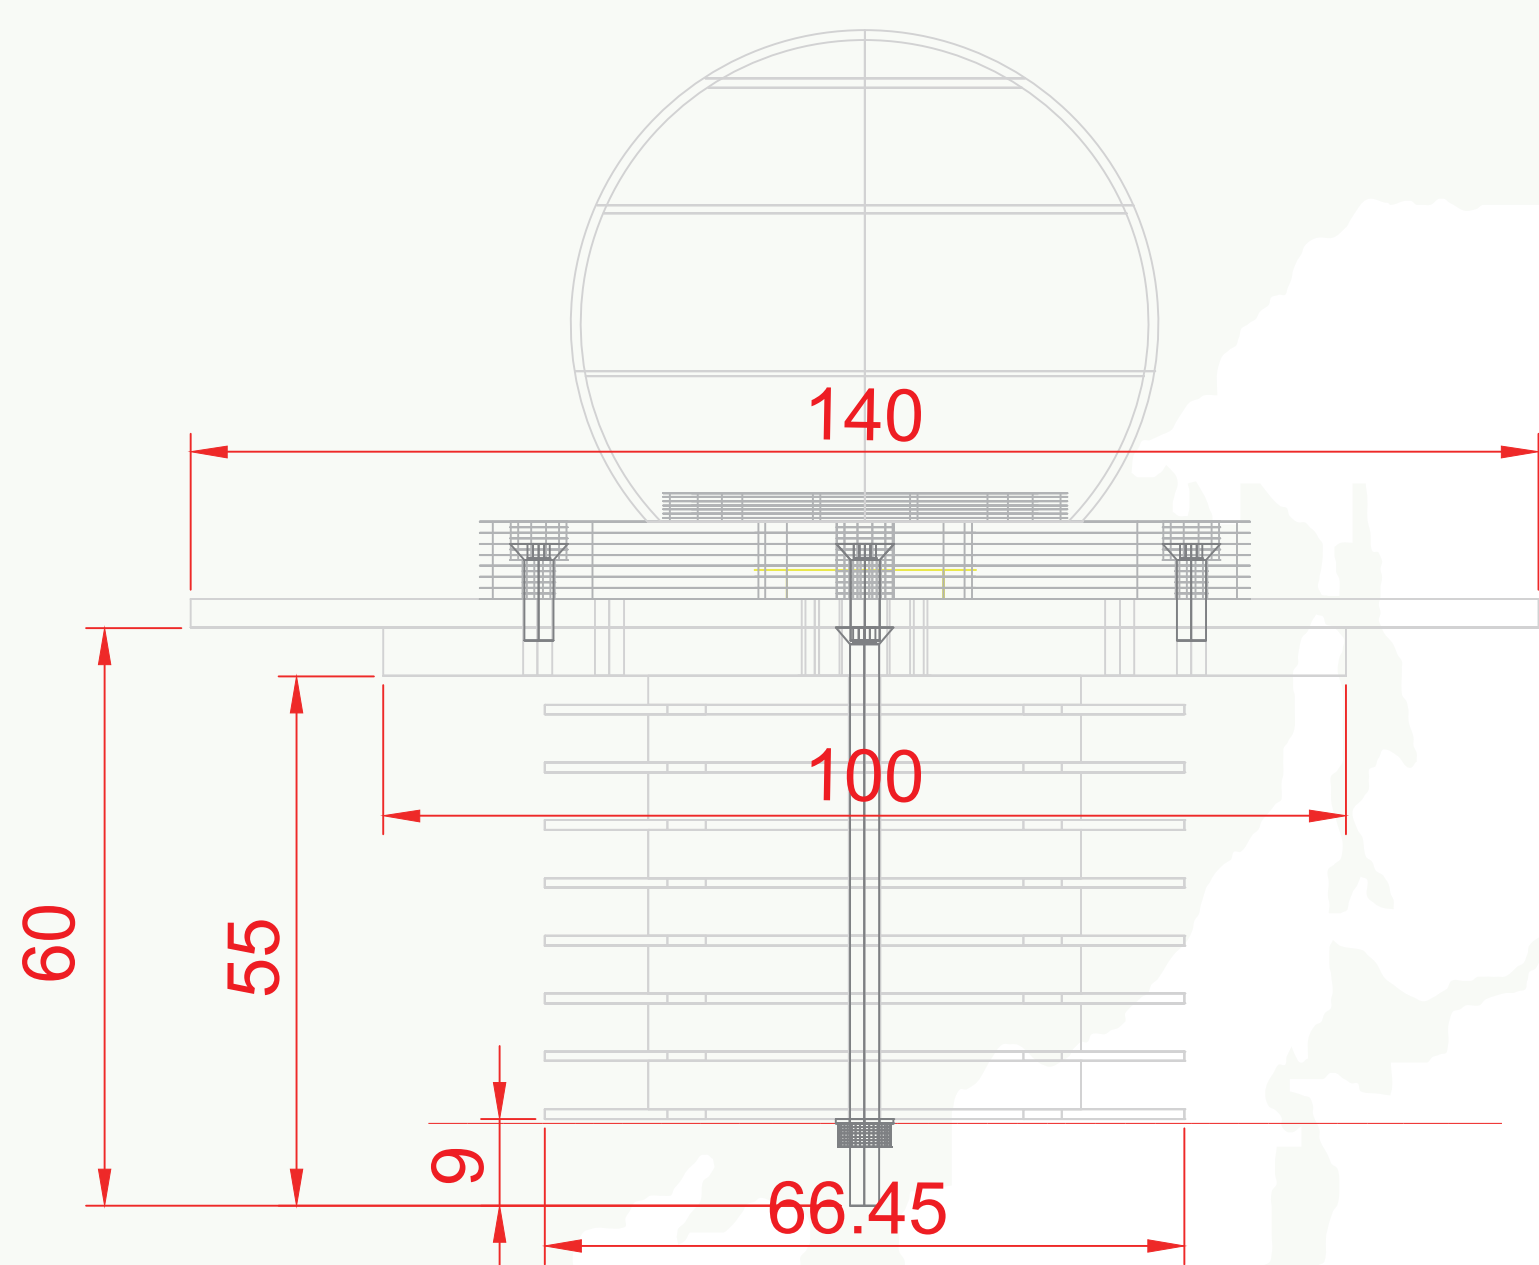
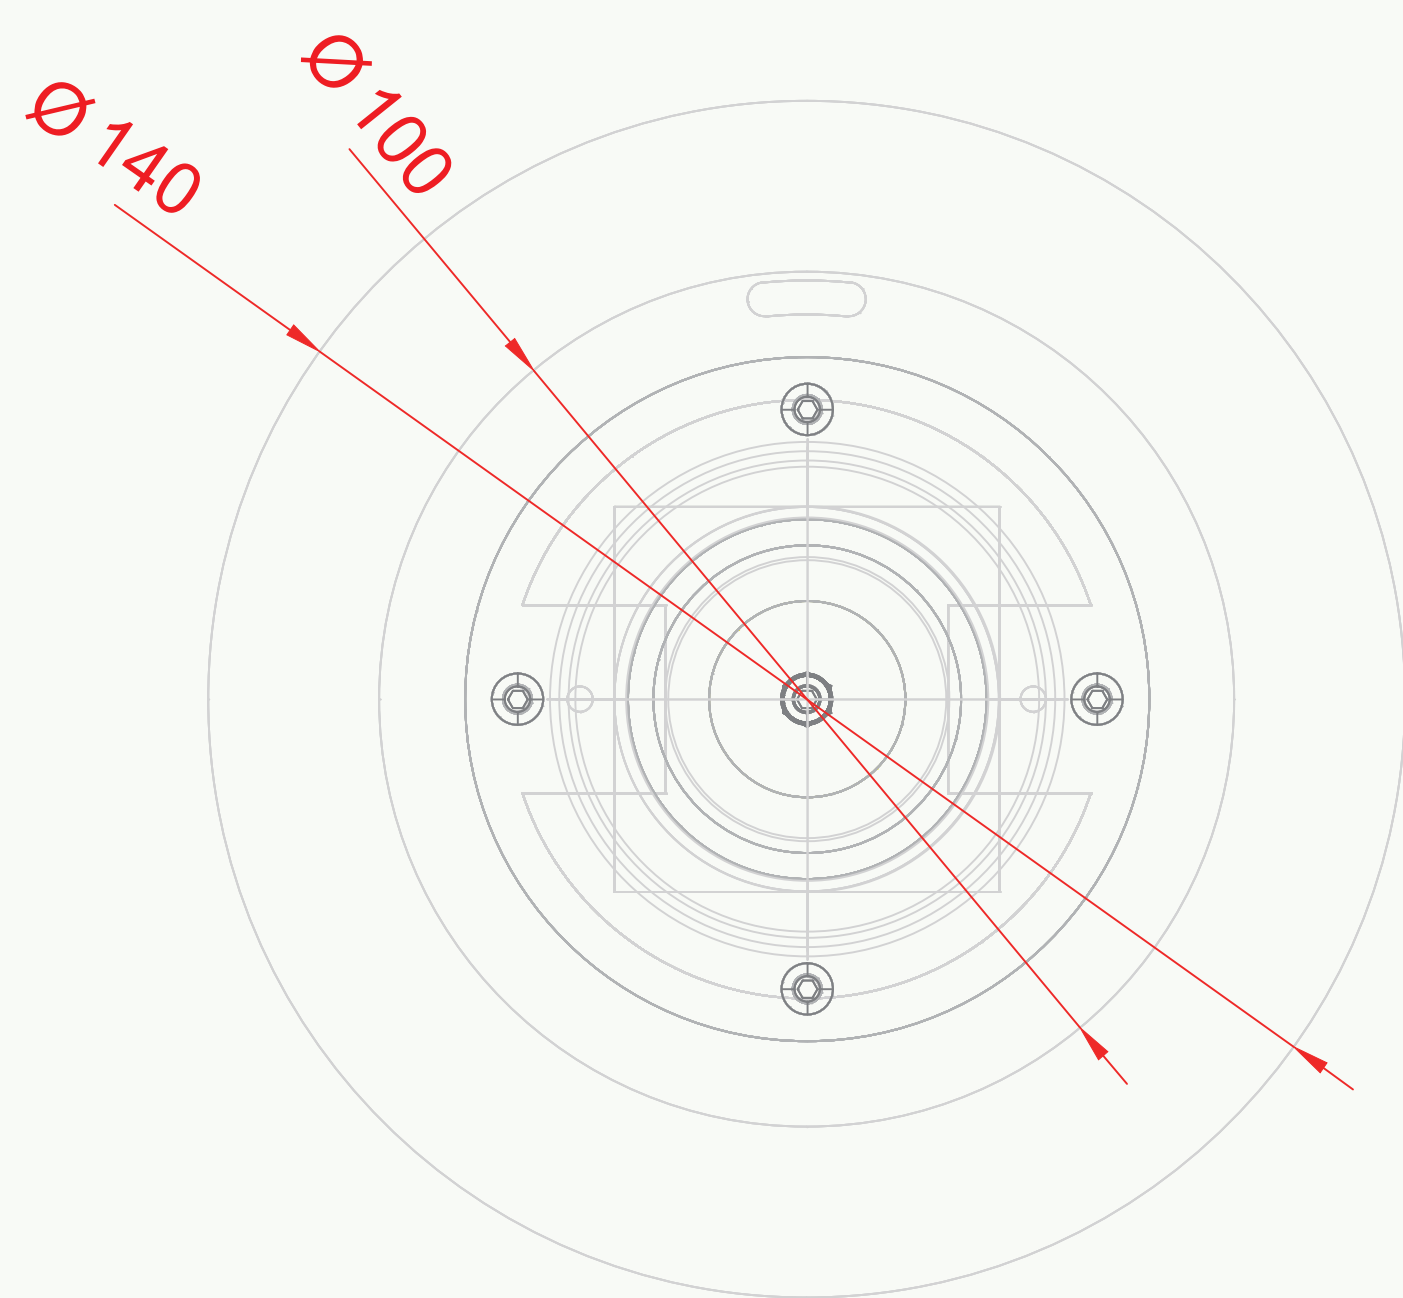
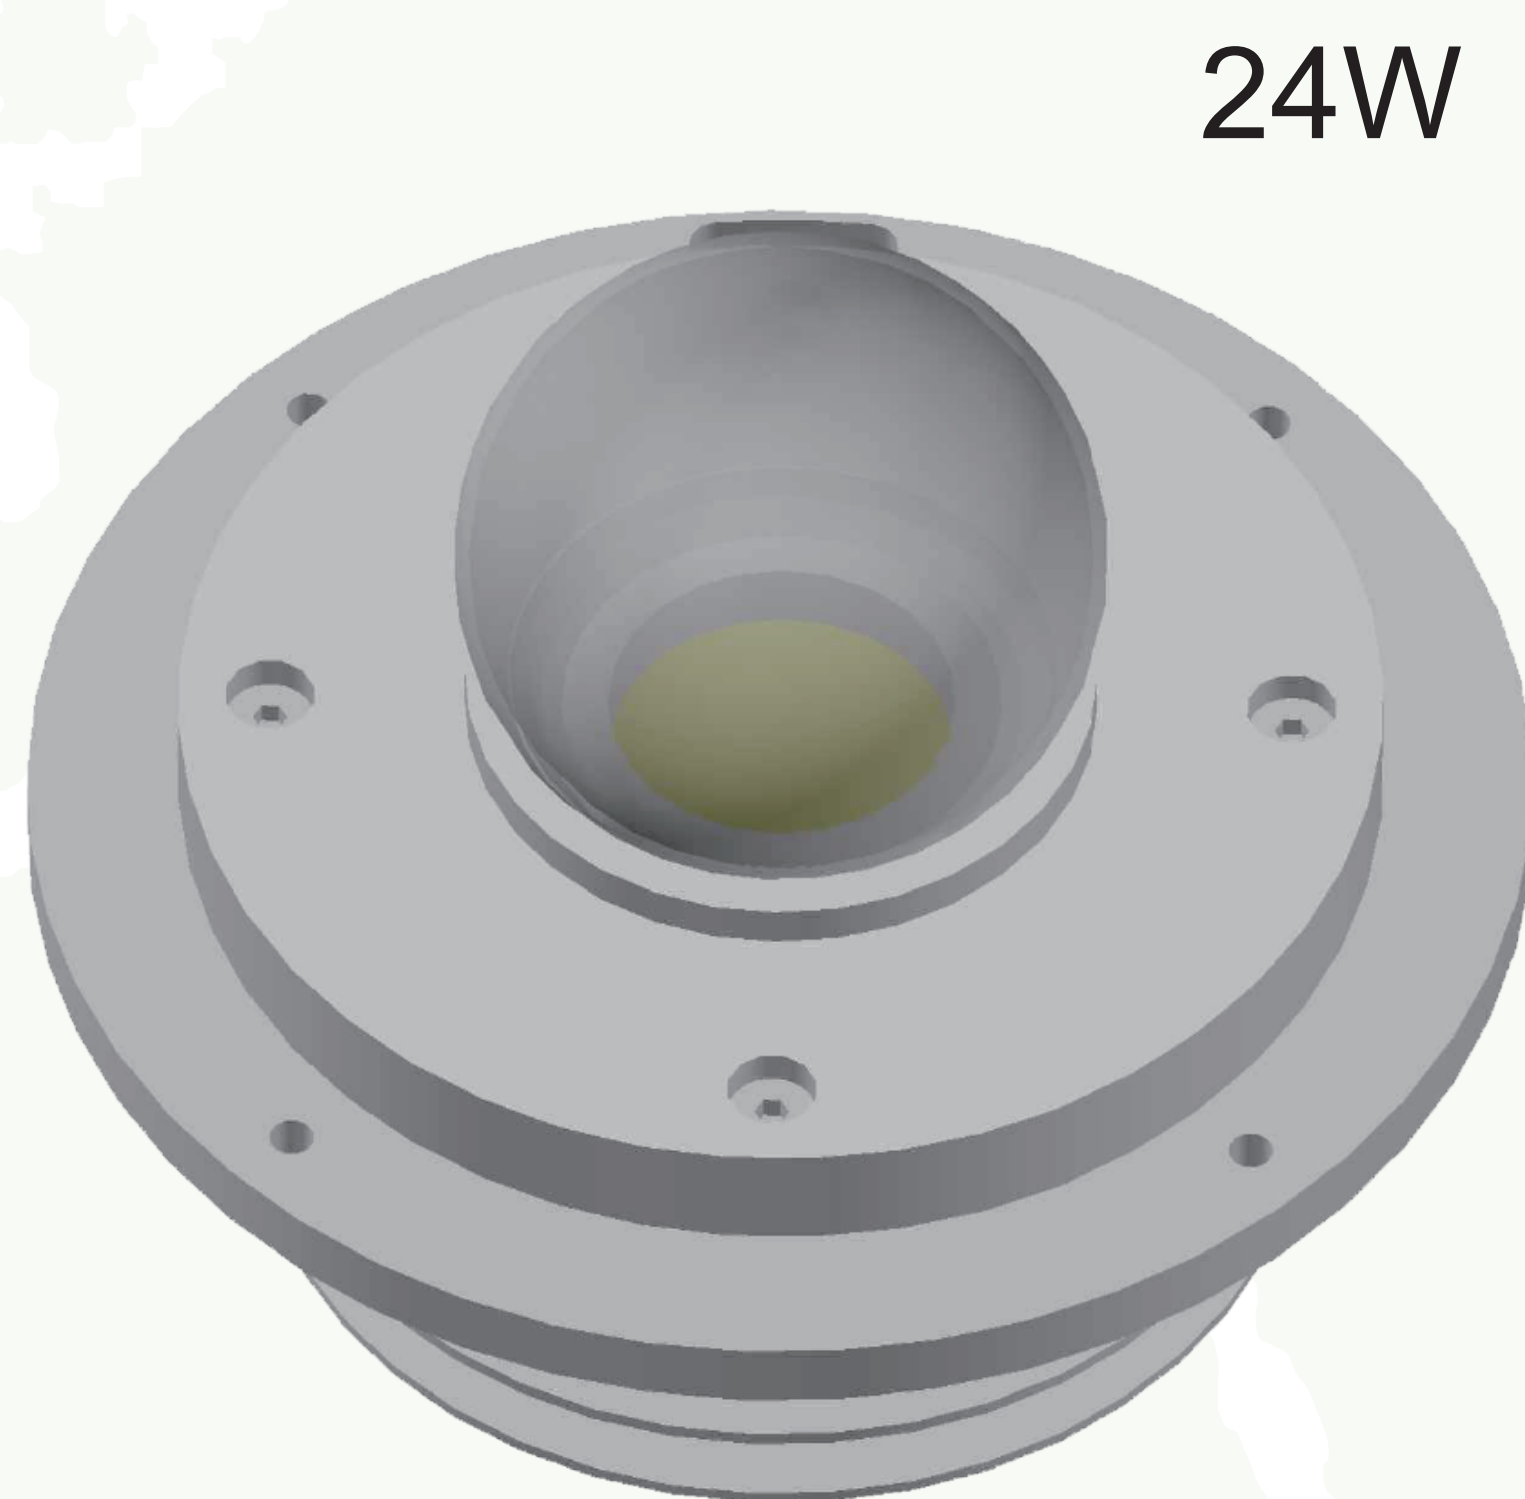
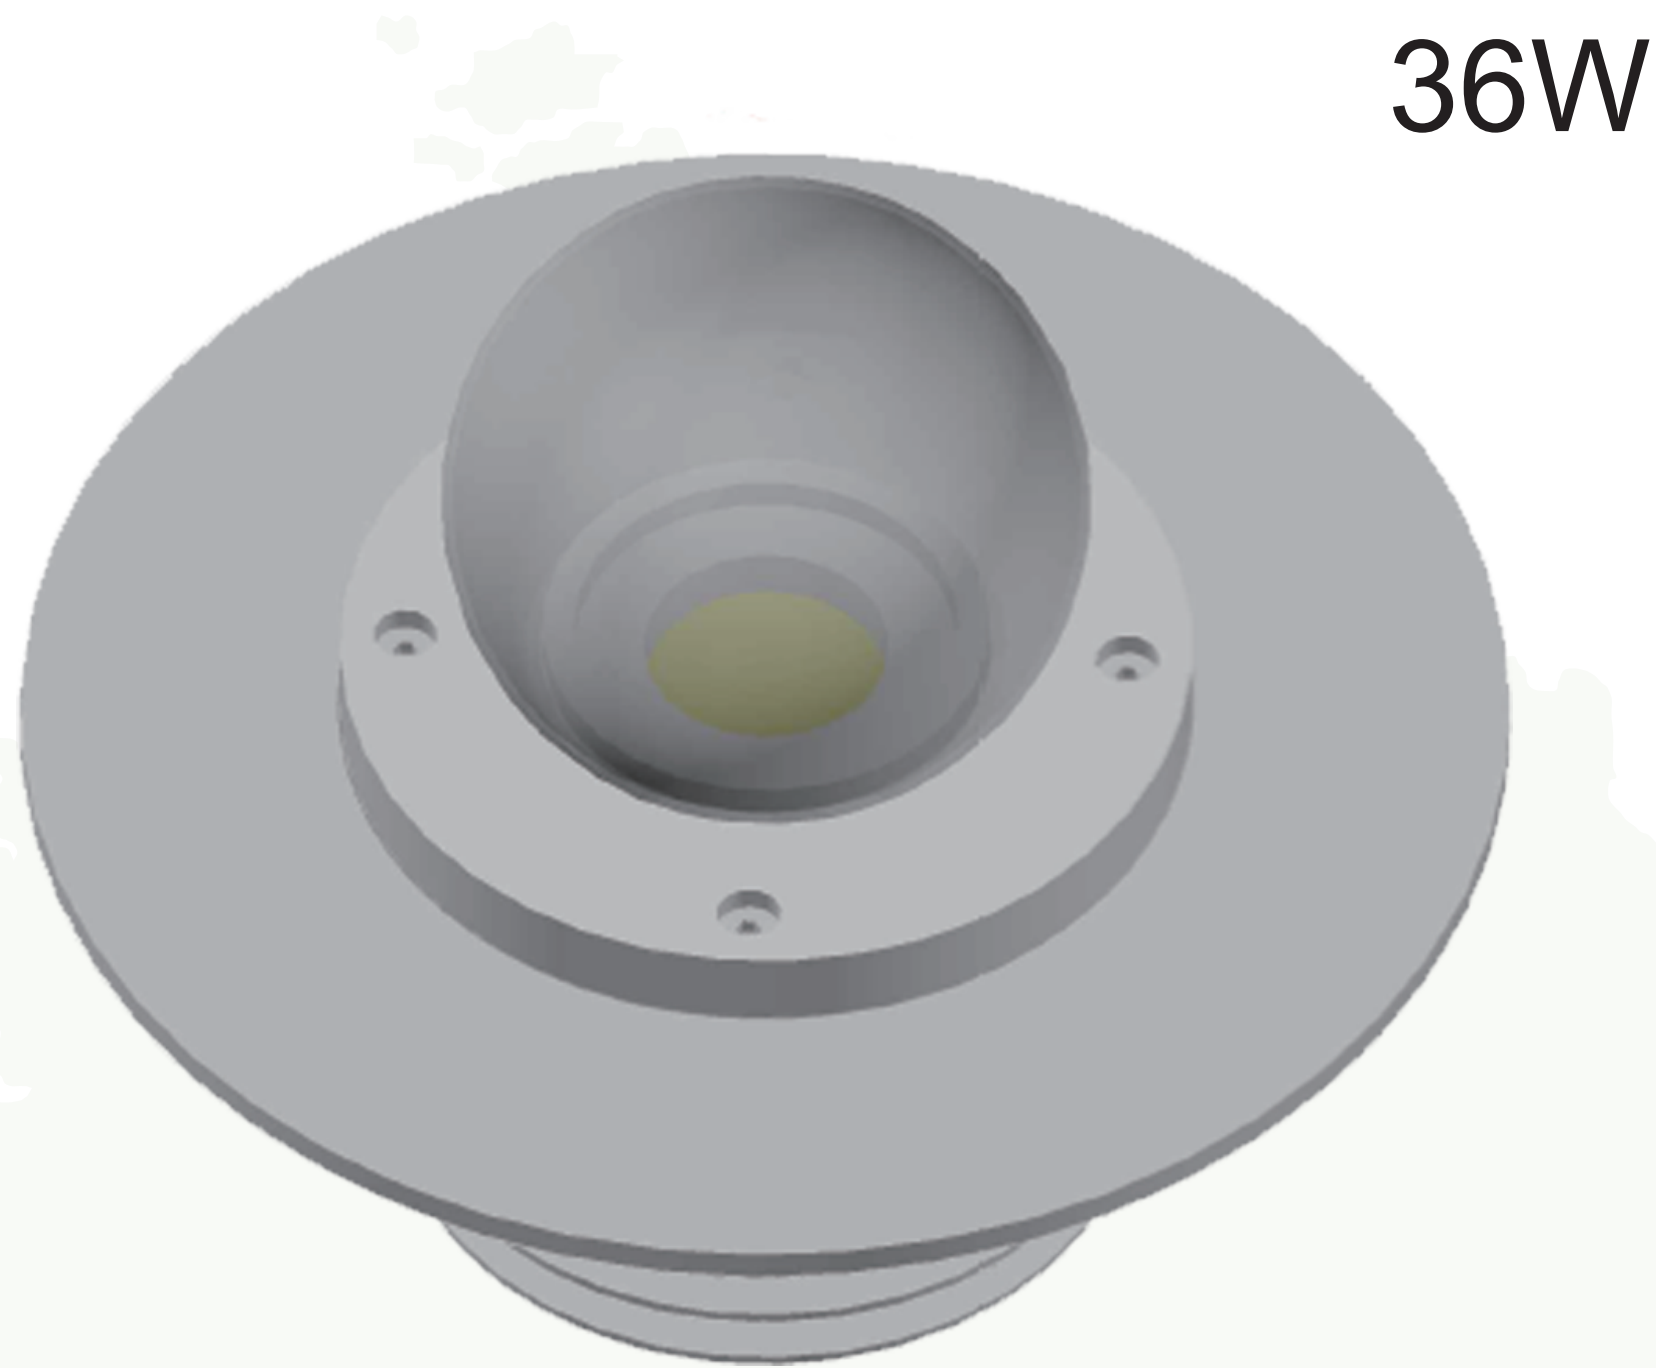
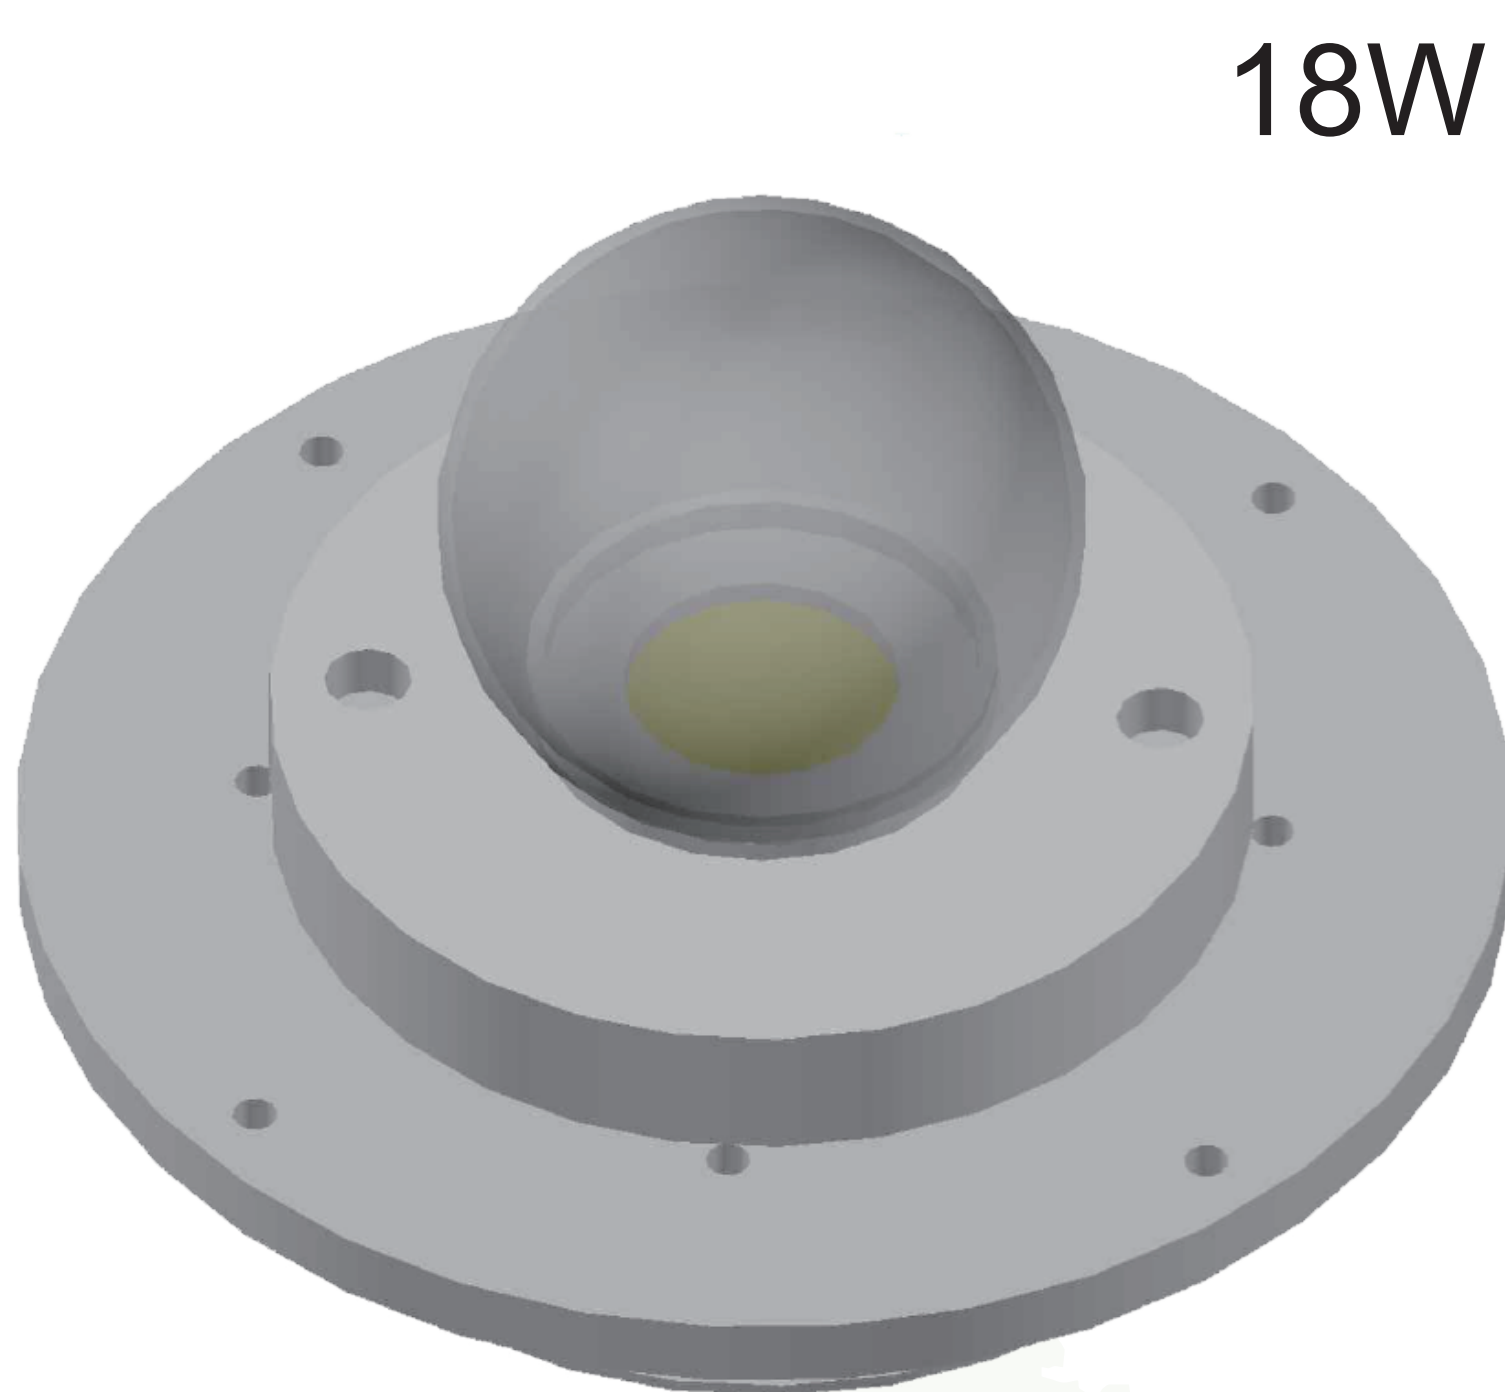
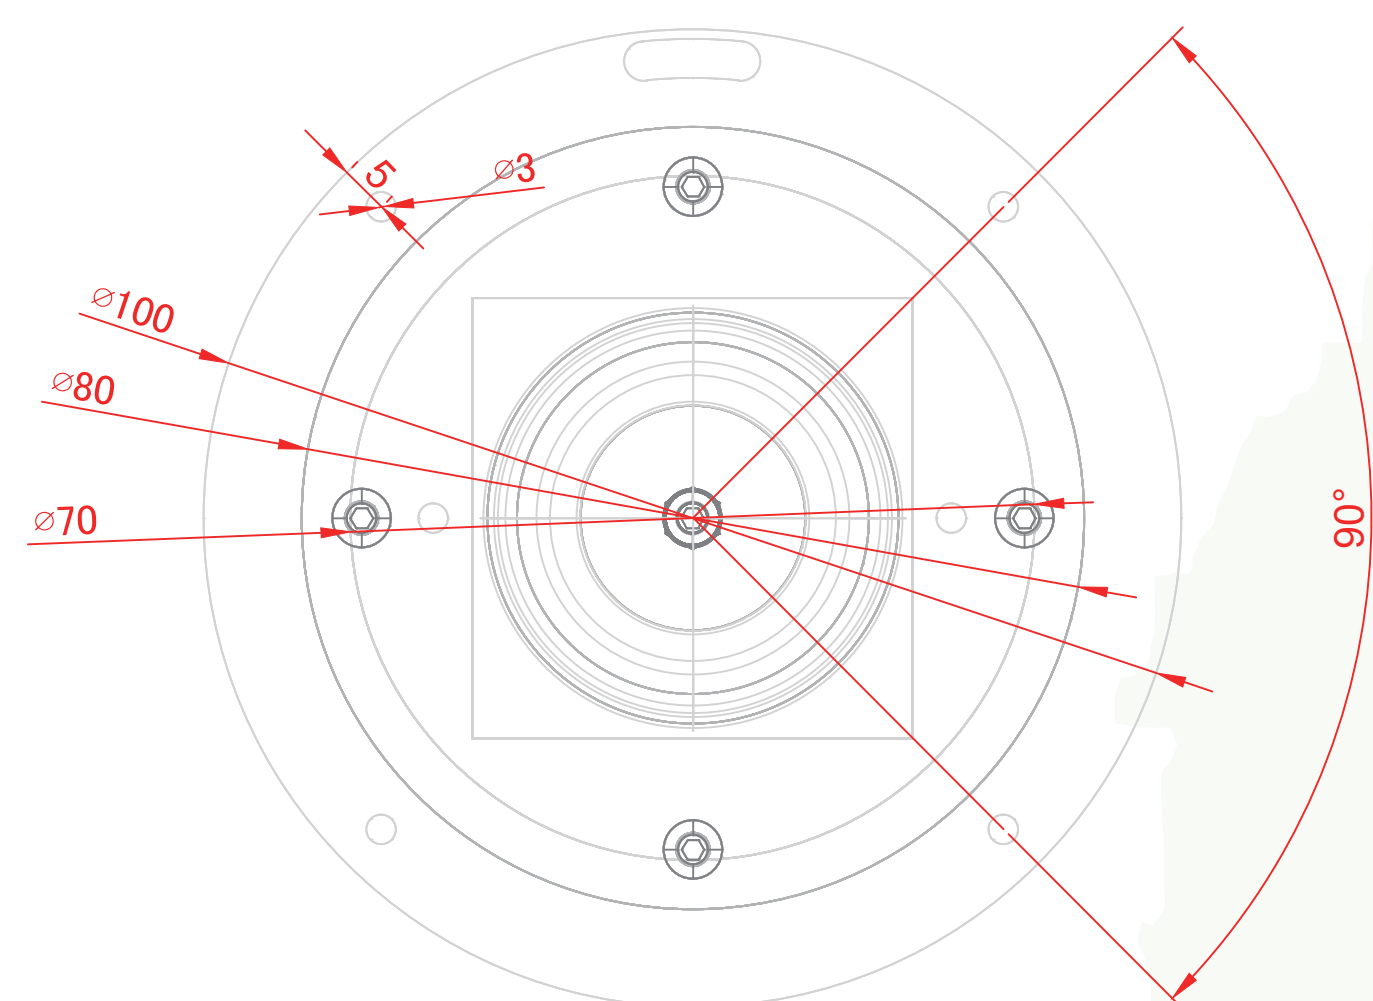
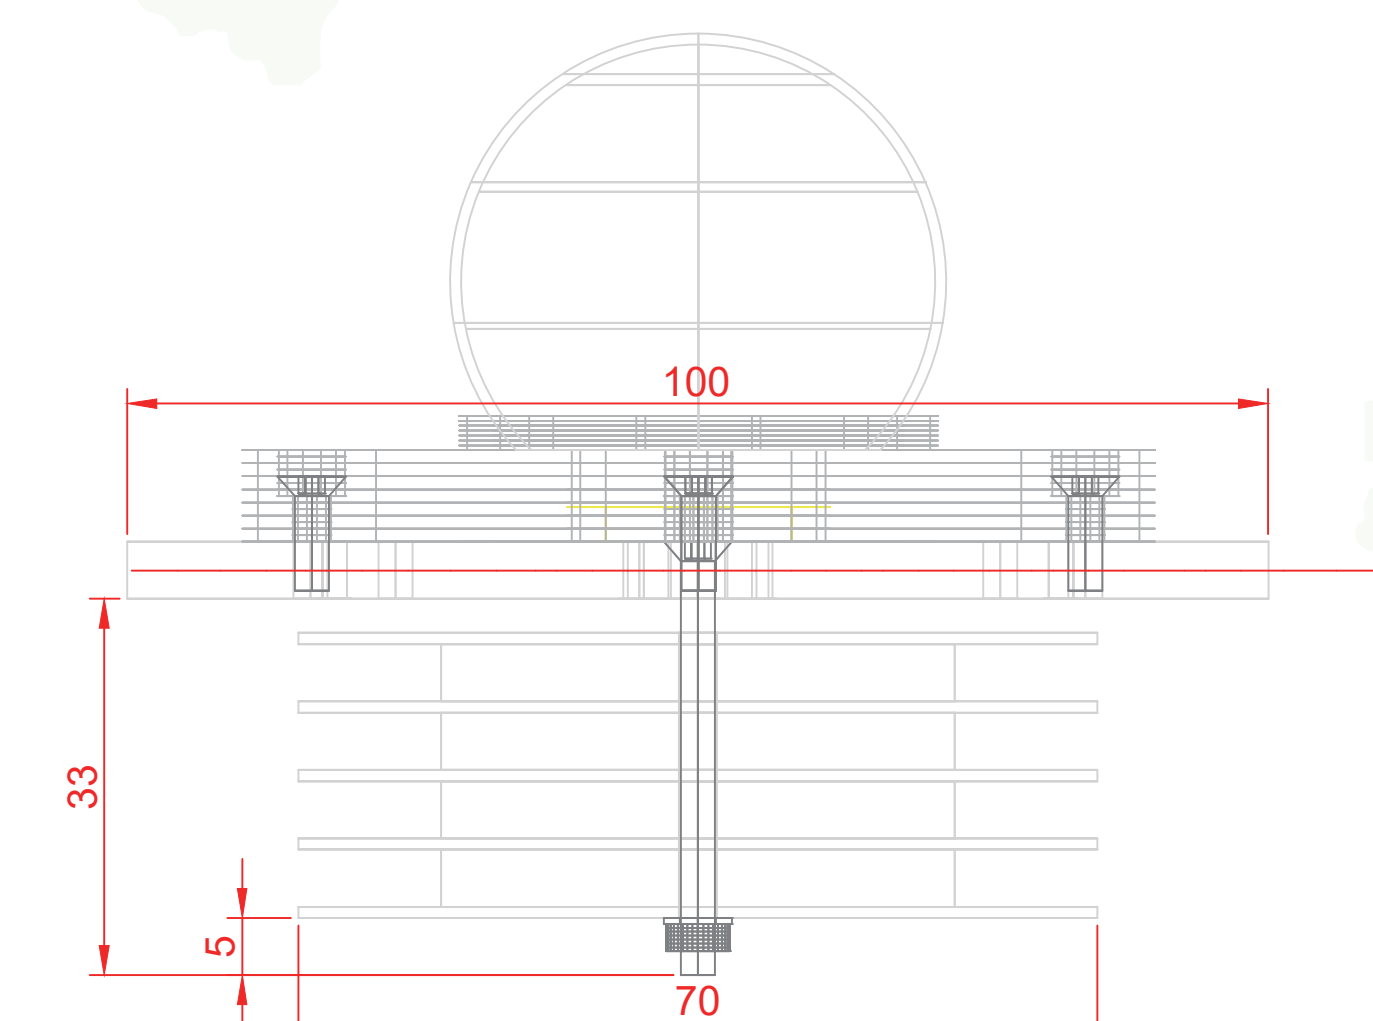
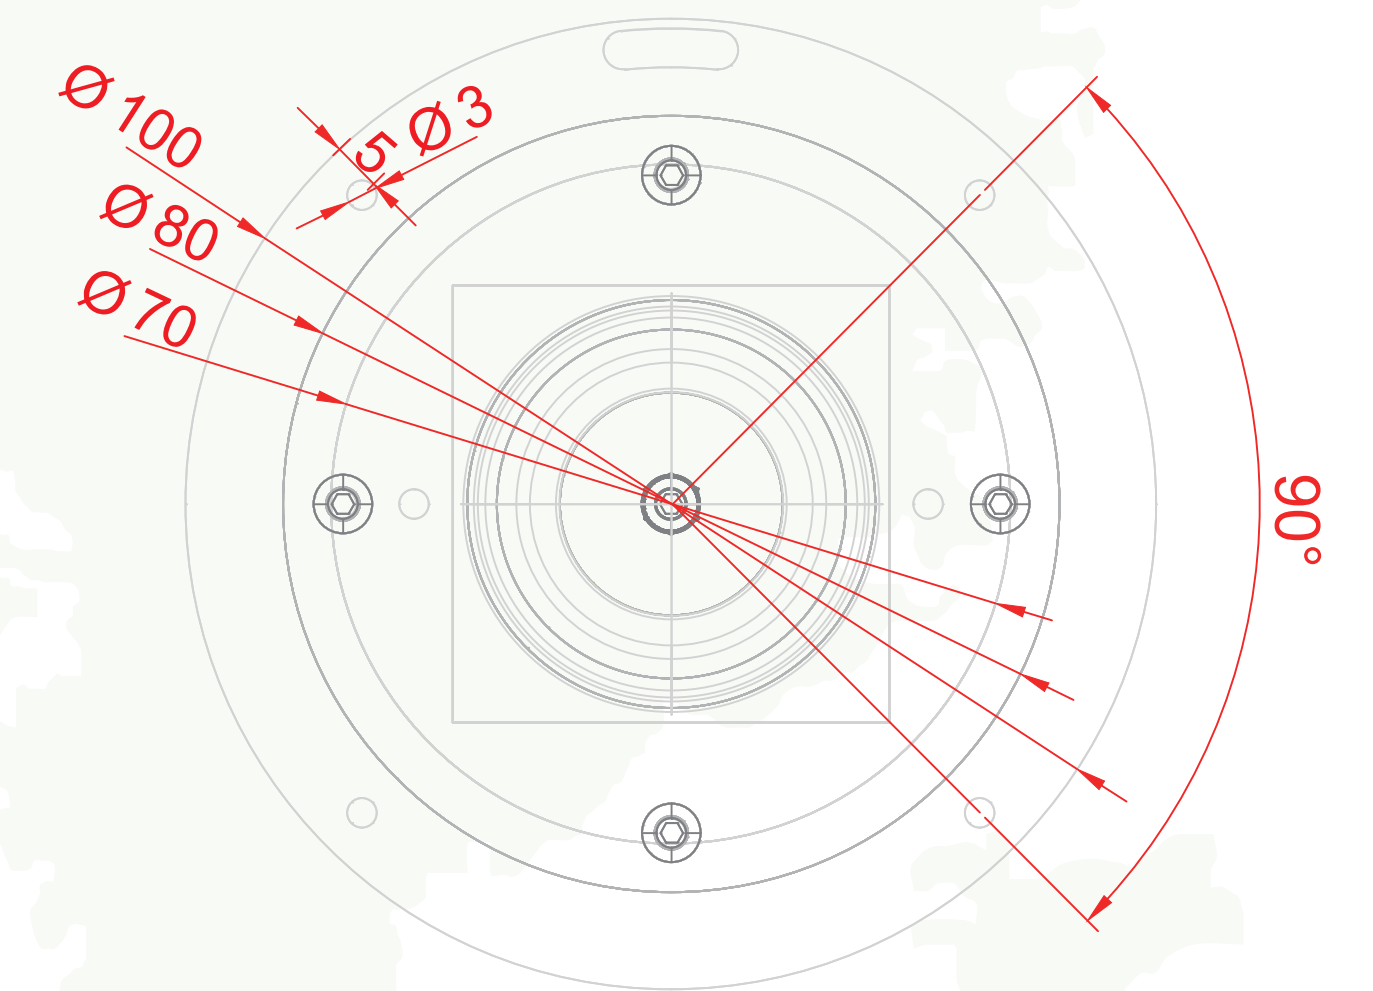


CPDT G2.1 Series

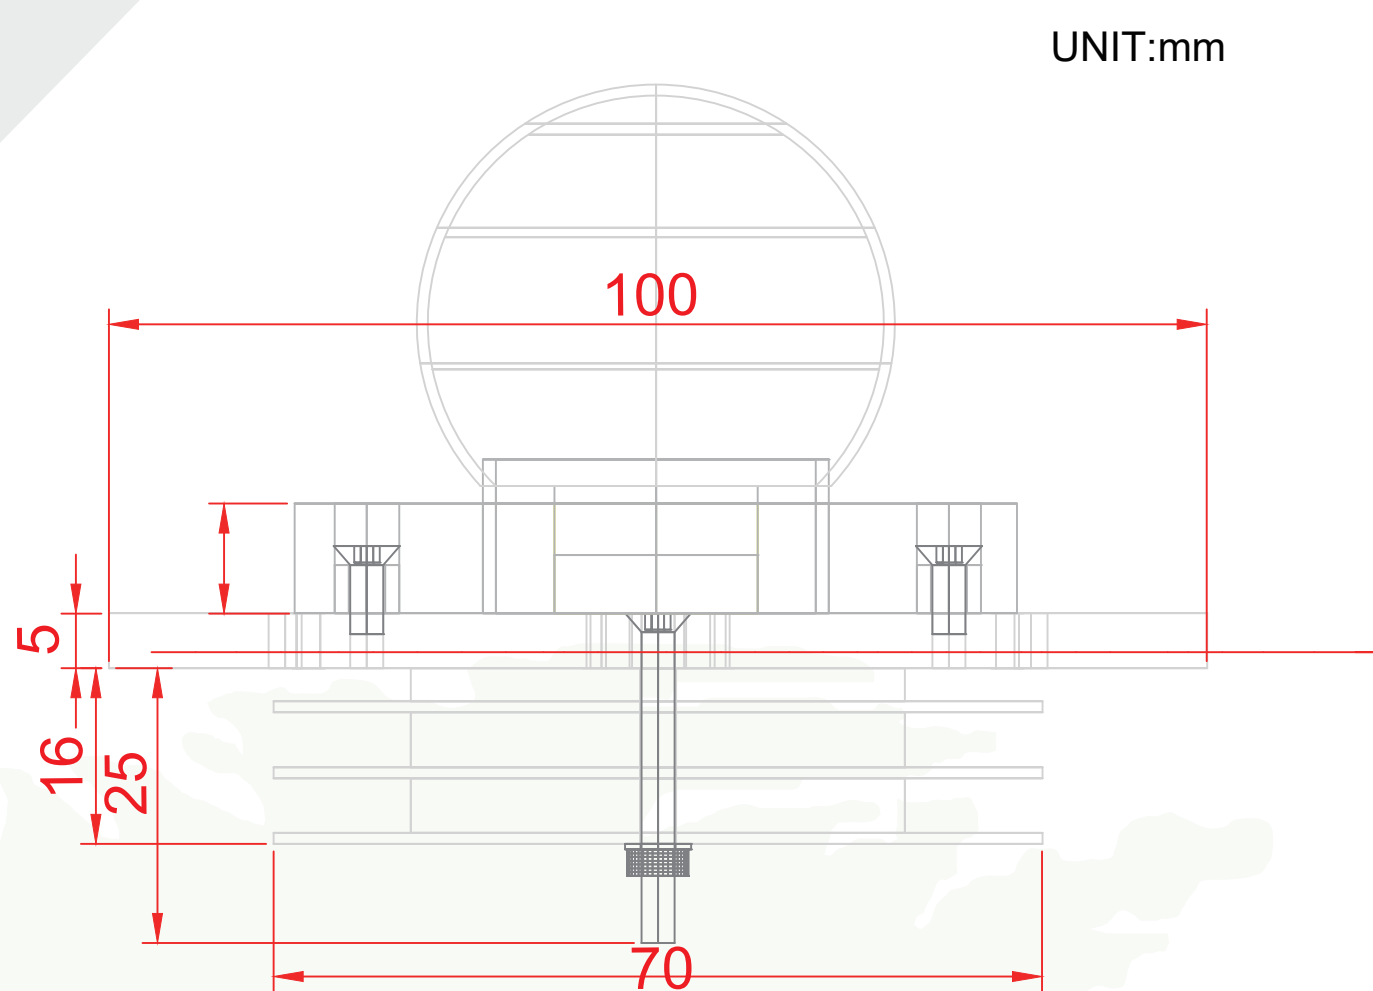

Features

- UL E355751
- Assemble easily
- Thermal managemant solution

Type	Watts (W)	Dimmable	Volts (V)	Transient Protection (KV)	Lumen	PF	CCT	THD
COB	18	Traic Dimming	120	2.5KV	1215	>0.99	3000K	<20%
COB	24	Traic Dimming	120	2.5KV	1730	>0.99	3000K	<20%
COB	36	Traic Dimming	120	2.5KV	2595	>0.99	3000K	<20%



EN62471

LM80

ErP