


Title 24 Solution G2.2

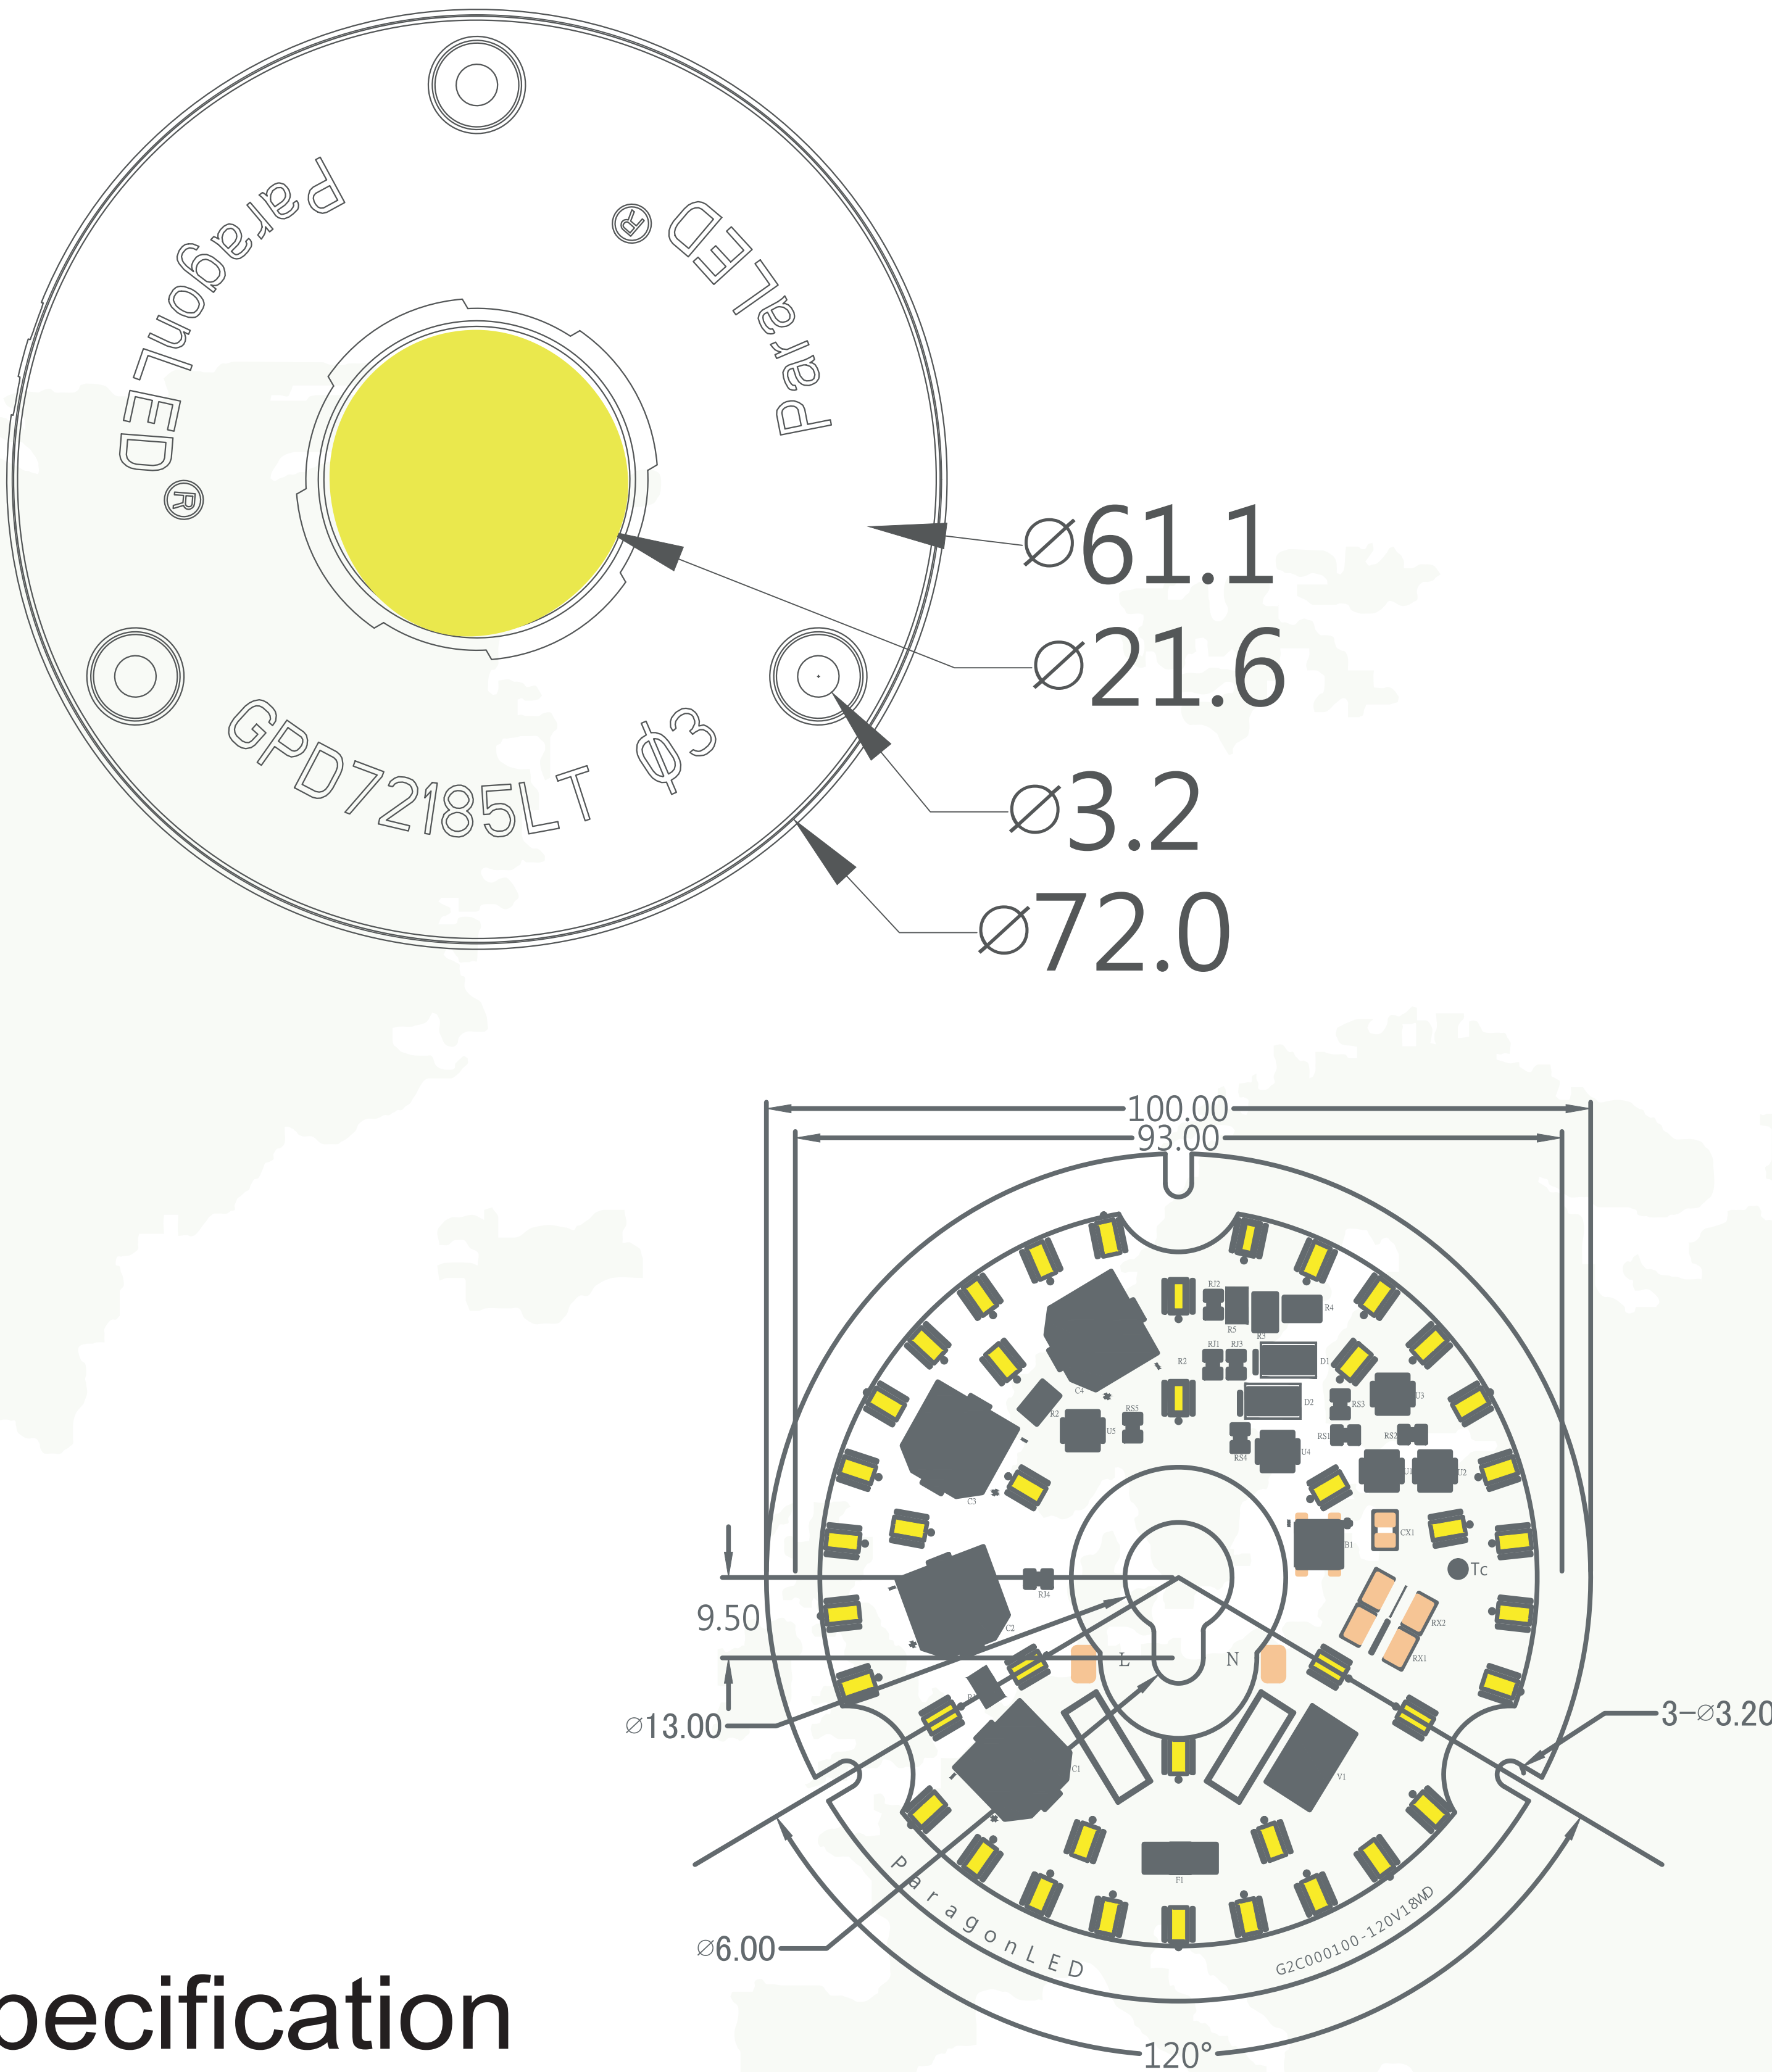

- ▶ LM80 Certificate
- ▶ UL E355751
- ▶ Dimmable , Flicker <28%
- ▶ EMC Certified
- ▶ Structure Patent US9803846B2
- ▶ Energy Star 4.0
- ▶ NEMA 77-2017
- ▶ CA Title 24 Solution

● Specification

Type	Watts (W)	Dimmable	Volts (V)	Transient Protection (KV)	Hi-Pot (KV)	Lumen	PF	Ra R9	CCT	*Flicker@200Hz Dm 100%*	*Flicker@200Hz Dm 20%*
COB	12	Traic Dimming	120V/230V	2.5KV	1.5KV	860	>0.95	>90 >50	3000K	14%	17%
COB	18	Traic Dimming	120V/230V	2.5KV	1.5KV	1300	>0.95	>90 >50	3000K	12%	20%
SMD	18	Traic Dimming	120V/230V	2.5KV	1.5KV	1400	>0.95	>90 >50	3000K	12%	20%
SMD	24	Traic Dimming	120V/230V	2.5KV	1.5KV	1900	>0.95	>90 >50	3000K	14%	21%
SMD	30	Traic Dimming	120V/230V	2.5KV	1.5KV	2300	>0.95	>90 >50	3000K	17%	24%
SMD	36	Traic Dimming	120V/230V	2.5KV	1.5KV	2800	>0.95	>90 >50	3000K	16%	26%

*JA10 Compliant

● Candle Power Distribution & Cartesian Coordinate

