
DST DUAL Fastener 30x10

1-045DST

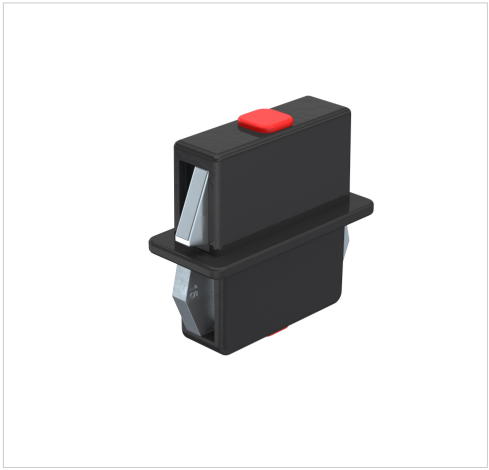

Advantages

- The Dual Fastener with DIRAK-SNAP-Technology has one fixed side and one detachable side.
- Tool-less installation.
- Application: joining 2 sheet metal panels.
- The DUAL Fastener keep the door in position and prevent vibration of the door.
- The cutout for the fixed side is 30x10mm.
- For the detachable side a cutout of 28x10mm to 30x16mm is possible.
- Vibration-proof.

Material

- **Dual Fastener:** PA, black or zinc die, black
- **Snap wedges:** sintered steel

Remarks

1. installed
2. removed
3. cutout for fixed side
4. cutout for detachable side / tolerance dimension
5. possible misalignment of the 2 cutouts

The sheet thicknesses (S) can be designed differently.

F = pull-off force


Fastener, zinc die, black

Product number	Clamping range (S)	Pull-off force	Installation type	Delivery Unit
295-9001.33-10001	0.7 - 1.2 mm	~15N	tool-less	10 pcs.
295-9001.33-10003	0.7 - 1.2 mm	~30N	tool-less	10 pcs.

Product number	Clamping range (S)	Pull-off force	Installation type	Delivery Unit
295-9001.33-10005	0.7 - 1.2 mm	~50N	tool-less	10 pcs.
295-9001.33-15001	1.2 - 1.7 mm	~15N	tool-less	10 pcs.
295-9001.33-15003	1.2 - 1.7 mm	~30N	tool-less	10 pcs.
295-9001.33-15005	1.2 - 1.7 mm	~50N	tool-less	10 pcs.
295-9001.33-20001	1.7 - 2.2 mm	~15N	tool-less	10 pcs.
295-9001.33-20003	1.7 - 2.2 mm	~30N	tool-less	10 pcs.
295-9001.33-20005	1.7 - 2.2 mm	~50N	tool-less	10 pcs.
295-9001.33-25001	2.2 - 2.7 mm	~15N	tool-less	10 pcs.
295-9001.33-25003	2.2 - 2.7 mm	~30N	tool-less	10 pcs.
295-9001.33-25005	2.2 - 2.7 mm	~50N	tool-less	10 pcs.
295-9001.33-30001	2.7 - 3.2 mm	~15N	tool-less	10 pcs.
295-9001.33-30003	2.7 - 3.2 mm	~30N	tool-less	10 pcs.
295-9001.33-30005	2.7 - 3.2 mm	~50N	tool-less	10 pcs.

Fastener, PA black

Product number	Clamping range (S)	Pull-off force	Installation type	Delivery Unit
295-9001.52-10001	0.7 - 1.2 mm	~15N	tool-less	10 pcs.
295-9001.52-10003	0.7 - 1.2 mm	~30N	tool-less	10 pcs.
295-9001.52-10005	0.7 - 1.2 mm	~50N	tool-less	10 pcs.
295-9001.52-15001	1.2 - 1.7 mm	~15N	tool-less	10 pcs.
295-9001.52-15003	1.2 - 1.7 mm	~30N	tool-less	10 pcs.
295-9001.52-15005	1.2 - 1.7 mm	~50N	tool-less	10 pcs.
295-9001.52-20001	1.7 - 2.2 mm	~15N	tool-less	10 pcs.
295-9001.52-20003	1.7 - 2.2 mm	~30N	tool-less	10 pcs.
295-9001.52-20005	1.7 - 2.2 mm	~50N	tool-less	10 pcs.
295-9001.52-25001	2.2 - 2.7 mm	~15N	tool-less	10 pcs.
295-9001.52-25003	2.2 - 2.7 mm	~30N	tool-less	10 pcs.
295-9001.52-25005	2.2 - 2.7 mm	~50N	tool-less	10 pcs.
295-9001.52-30001	2.7 - 3.2 mm	~15N	tool-less	10 pcs.
295-9001.52-30003	2.7 - 3.2 mm	~30N	tool-less	10 pcs.
295-9001.52-30005	2.7 - 3.2 mm	~50N	tool-less	10 pcs.

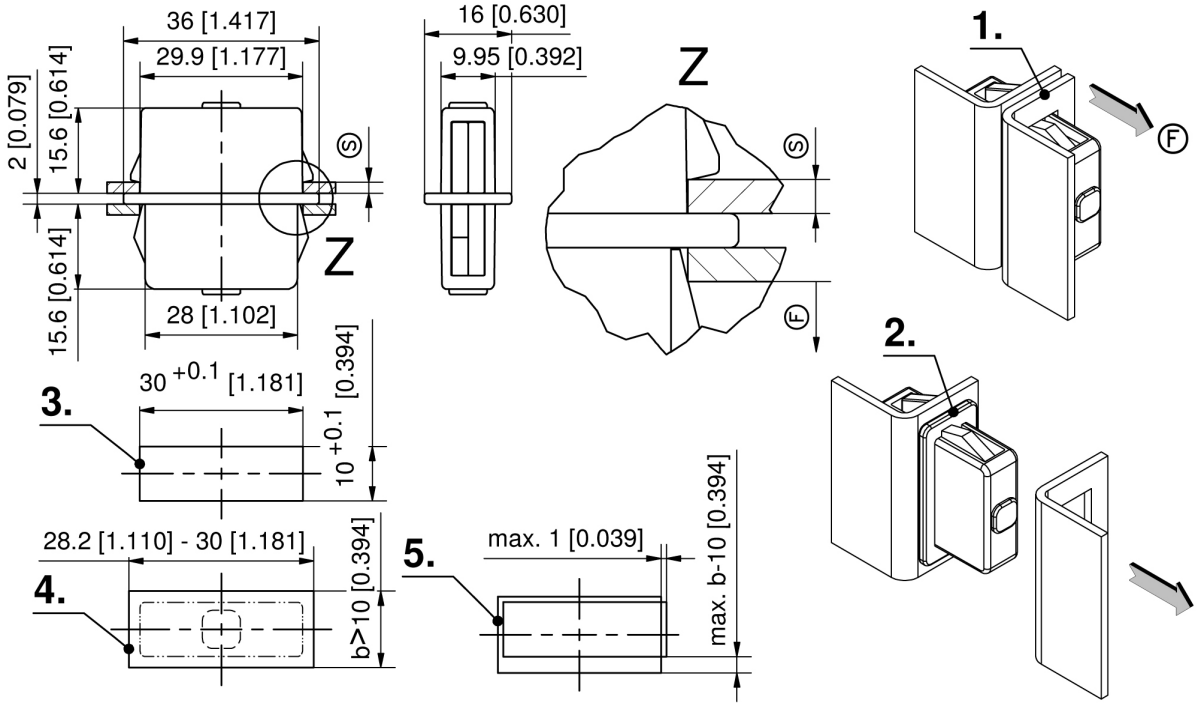
36 [1.417]
29.9 [1.177]
2 [0.079]
15.6 [0.614]
15.6 [0.614]
28 [1.102]
Ⓢ
Z
16 [0.630]
9.95 [0.392]
Z
Ⓢ
Ⓕ
1.
Ⓕ
2.
3.
30 +0.1 [1.181]
10 +0.1 [0.394]
4.
28.2 [1.110] - 30 [1.181]
b>10 [0.394]
5.
max. 1 [0.039]
max. b-10 [0.394]