
DST Fastener 30x10

1-046DST

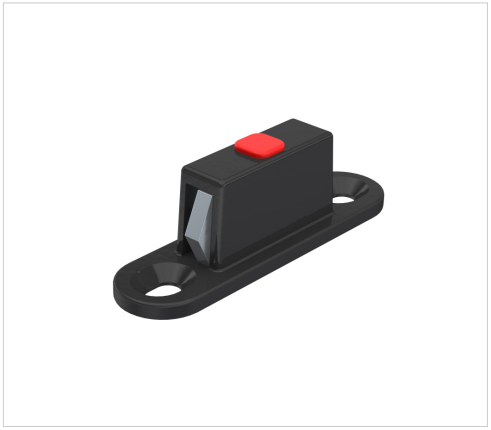

Advantages

- With DIRAK-SNAP-Technology for a one-sided fixed and a one-sided detachable connection.
- For cutout 30x10.
- The width of the cutout can be enlarged for adjusting.
- Blind assembly in closed profiles.
- Vibration-proof.
- The fastener can be screwed on for flush applications in a recess (metal sheet / wood)

Material

- **Fastener:** zinc die, black
- **Snap wedges:** sintered steel, zinc plated

Remarks


F = pull-off force

Fastening with countersunk screws M4 or wood screws.

1. cutout for detachable side / tolerance dimension
2. e.g. sheet metal
3. e.g. wood

Fastener

Product number	Clamping range (S)	Pull-off force	Installation type	Delivery Unit
295-9002.00-00001	0.8 - 3.0 mm	~15N	tool-less / screw-on	10 pcs.
295-9002.00-00003	0.8 - 3.0 mm	~30N	tool-less / screw-on	10 pcs.
295-9002.00-00005	0.8 - 3.0 mm	~50N	tool-less / screw-on	10 pcs.

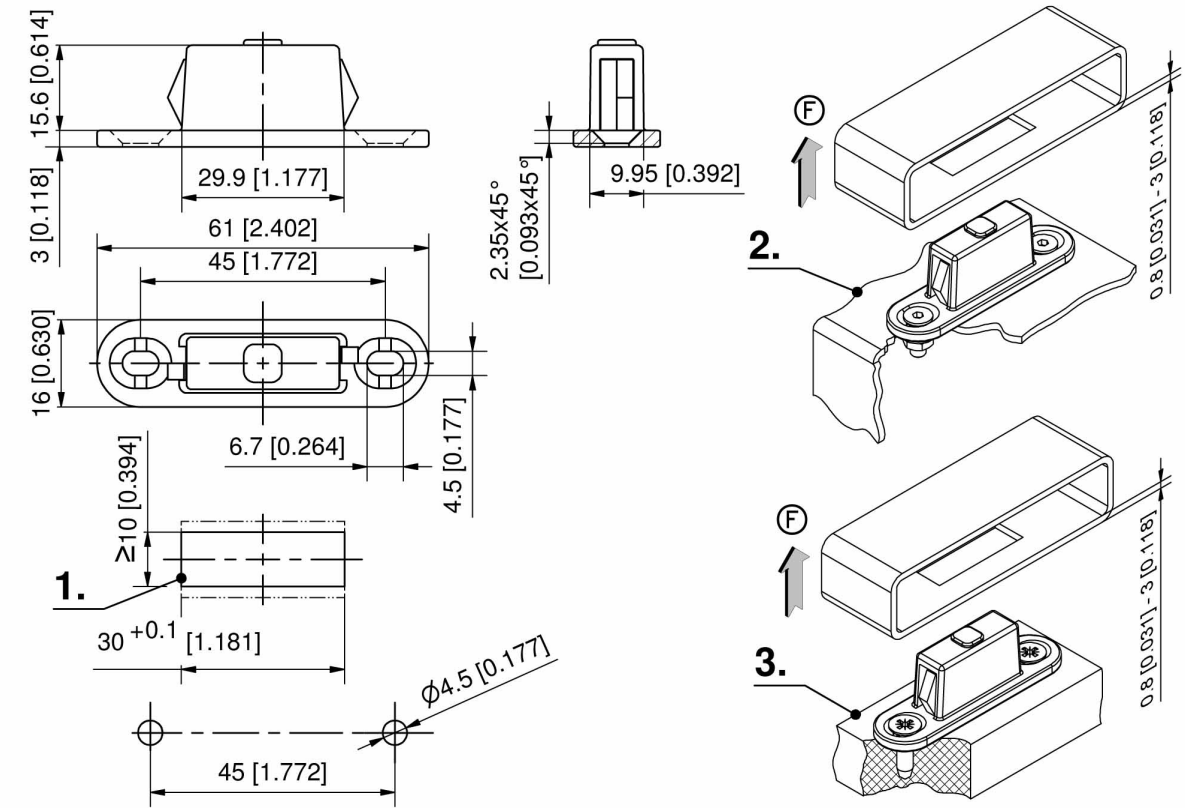
15.6 [0.614]
3 [0.118]
29.9 [1.177]
61 [2.402]
45 [1.772]
16 [0.630]
6.7 [0.264]
4.5 [0.177]
≥10 [0.394]
1.
30 +0.1 [1.181]
ϕ4.5 [0.177]
45 [1.772]
2.35x45°
[0.093x45°]
9.95 [0.392]
F
2.
0.8 [0.031] - 3 [0.118]
F
3.
0.8 [0.031] - 3 [0.118]