
Tenon Blocks and Anti-twist Protection

4-248

RoHS WEEE

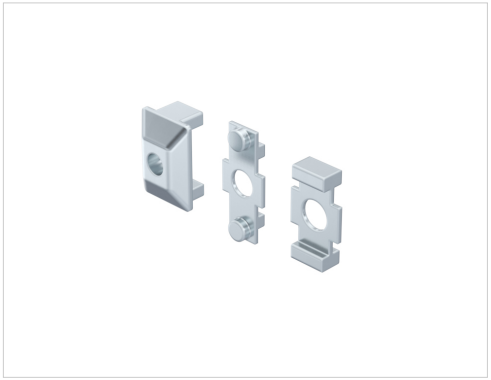

Advantages

- For application with hinges 4-247 and 4-247.01.
- Tenon blocks for 8 or 10mm groove.
- Fastening by M6.
- Anti-twist protection for sheet metal construction.
- For vertical or horizontal applications.
- Tolerance compensation possible by oblong holes.


Material

- **Tenon blocks and anti-twist protection:** zinc die, untreated

Remarks

Tenon Blocks and Anti-twist Protection

	Product number	Name	Groove width	Cutout	Thread size	Door-thickness (S)	Delivery Unit
a)	265-1001.00-00000	Tenon blocks with anti-twist protection	8 mm	8 x 20 to 25 mm	M6	0 mm - 3.2 mm	10 pcs.
b)	265-1002.00-00000	Tenon blocks with anti-twist protection	10 mm	10 x 20 to 25 mm	M6	0 mm - 3.2 mm	on request
c)	265-1101.00-00000	Anti-twist protection for square	8 mm	8 x 20 to 25 mm			10 pcs.
d)	265-1102.00-00000	Anti-twist protection for square	10 mm	10 x 20 to 25 mm			on request
e)	265-1103.00-00000	Anti-twist protection for drill-holes		3 options, see drawing			10 pcs.

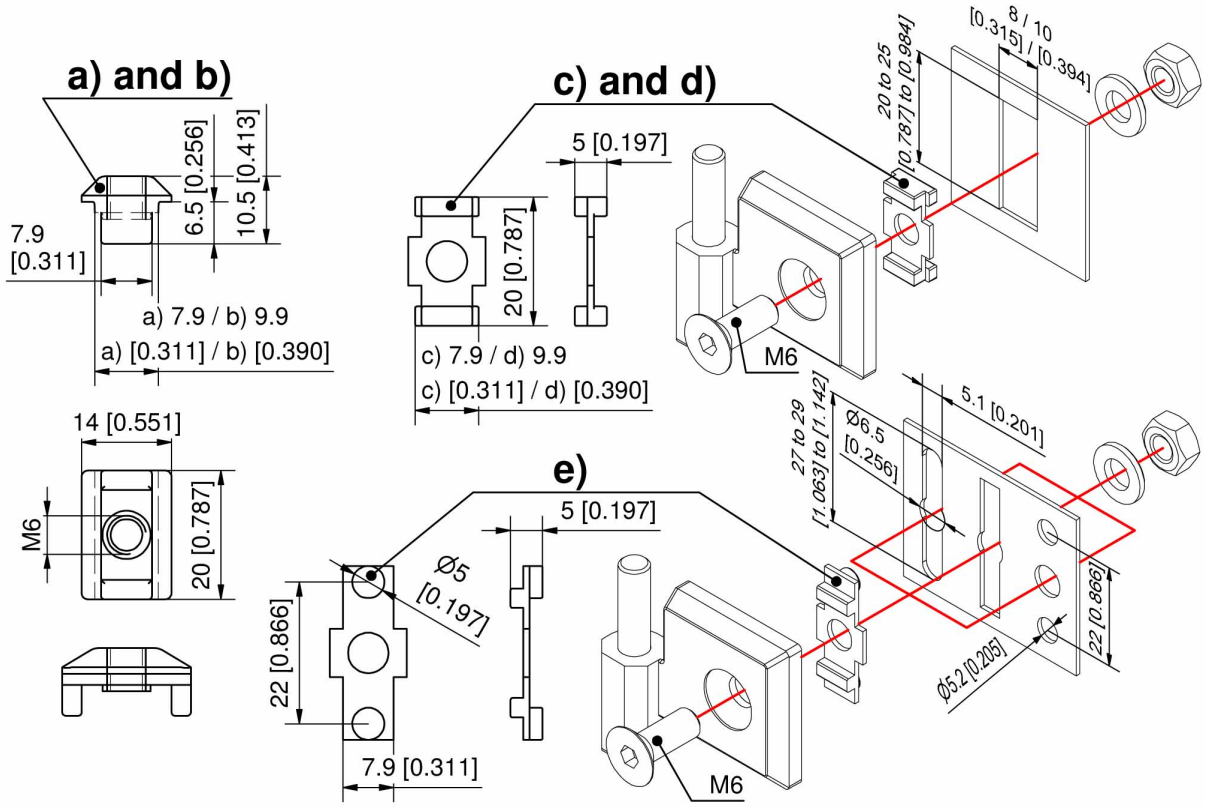
a) and b)
7.9
[0.311]
6.5 [0.256]
10.5 [0.413]
a) 7.9 / b) 9.9
a) [0.311] / b) [0.390]
c) and d)
5 [0.197]
20 [0.787]
c) 7.9 / d) 9.9
c) [0.311] / d) [0.390]
20 to 25
[0.787] to [0.984]
8 / 10
[0.315] / [0.394]
M6
14 [0.551]
M6
20 [0.787]
e)
5 [0.197]
Ø5
[0.197]
22 [0.866]
7.9 [0.311]
M6
27 to 29
[1.063] to [1.142]
Ø6.5
[0.256]
5.1 [0.201]
Ø5.2 [0.205]
22 [0.866]