


CPD T24 G2.2 Series

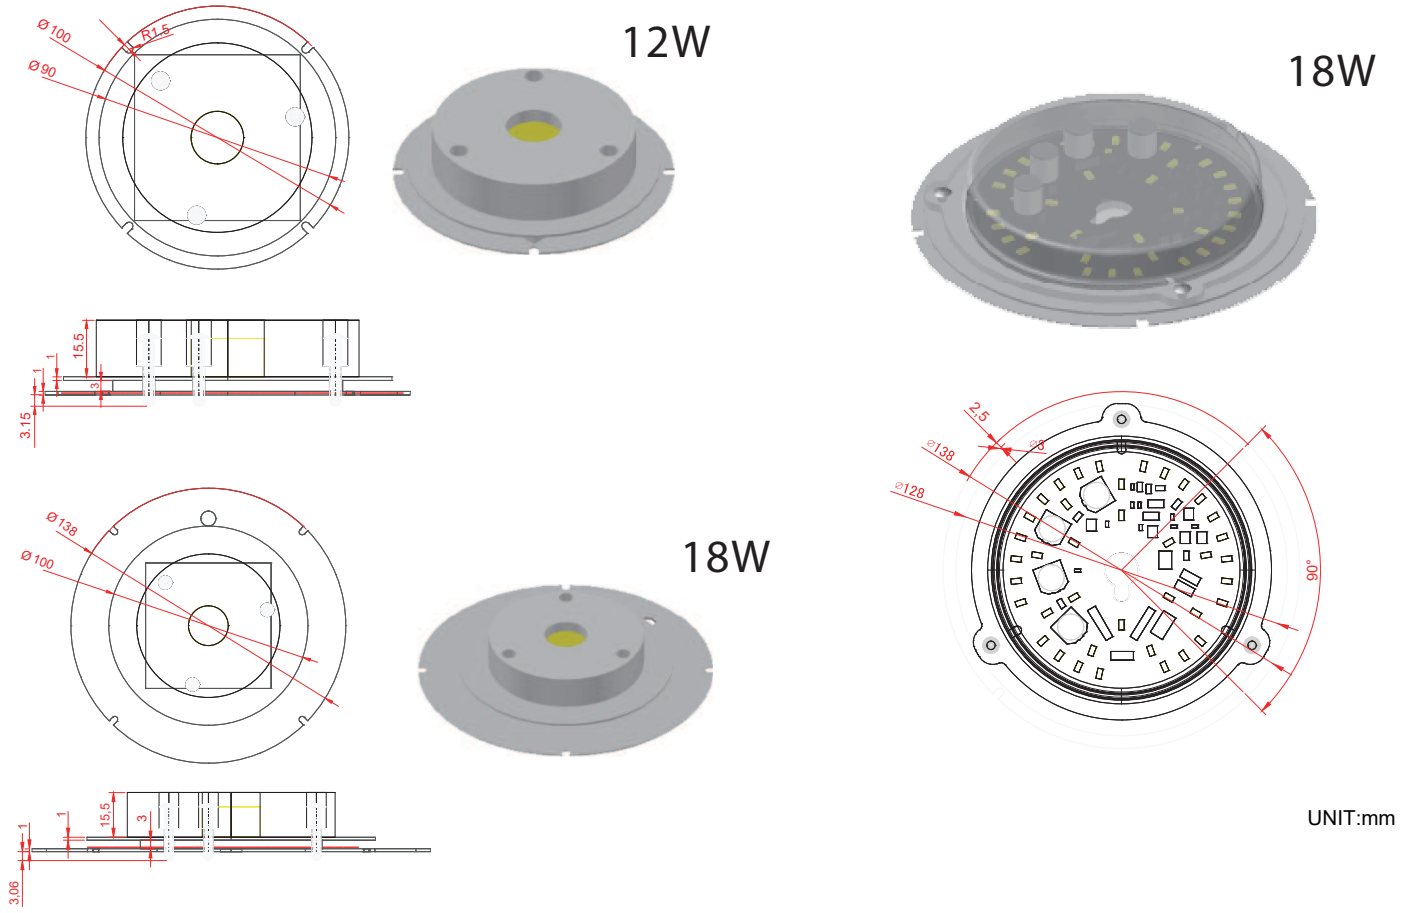

UNIT:mm

Features

- CA Title 24 Solution
- LM80 Certificated
- NEMA 77-2017
- EMC Certified
- Assemble easily
- UL E355751
- Thermal managemant solution

Type	Watts (W)	Dimmable	Volts (V)	Transient Protection (KV)	Hi-Pot (KV)	Lumen	PF	Ra R9	CCT	*Flicker@200Hz Dm 100%*	*Flicker@200Hz Dm 20%*
COB	12	Traic Dimming	120V/230V	2.5KV	1.5KV	860	>0.95	>90 >50	3000K	14%	17%
COB	18	Traic Dimming	120V/230V	2.5KV	1.5KV	1300	>0.95	>90 >50	3000K	12%	20%
SMD	18	Traic Dimming	120V/230V	2.5KV	1.5KV	1400	>0.95	>90 >50	3000K	12%	20%

*JA10 Compliant



EN62471

LM80

ErP