

2.5" SATA-III DATASHEET

2.5" SATA SOLID STATE DRIVE



The information and specification provided in this document should be used for comparative analysis and reference purposes. The contents of this document are subject to change without prior notice.

TABLE OF CONTENTS

Table of Figures.....	3
Table of Tables	3
1.0 Product Description	4
1.1 Product Overview	4
1.2 Product Features.....	4
2.0 Product Ordering Part Numbers	5
2.1 Ordering Part Structure	5
2.2 Valid Ordering Part Numbers.....	5
3.0 Physical Specifications	5
3.1 Mechanical Specifications(PCBA).....	5
4.0 Electrical Specifications.....	6
4.1 Performance Specifications	6
4.2 ABSOLUTE MAXIMUM RATINGS	7
4.3 Power Consumption Test for Result	7
5.0 Environmental Specifications	8
6.0 Quality And Reliability Specifications	8
7.0 Compliance Specifications	9
8.0 Pin Descriptions	9
8.1 DATA PIN ASSIGNMENTS	9
8.2 CONFIGURATION DESCRIPTIONS	9
9.0 Supported ATA Command Set	10
9.1 ATA Command Register	10

10.0 Installation	12
Change Record	13

TABLE OF FIGURES

Figure 1: 2.5" SATAIII SSD Outline Drawing	5
--	---

TABLE OF TABLES

Table 1: Ordering Part Structure.....	5
Table 2: Valid Ordering Part Numbers.....	5
Table 3: Data Transfer Time Specifications.....	7
Table 4: Absolute Maximum Ratings	7
Table 5: Power Consumption Test for Result	7
Table 6: Compatibility Test Config	8
Table 7: Data Pin Signal Assignment	9
Table 8: Configuration Description	9
Table 9: ATA Command table	10
Table 10: Change Record	13

1.0 PRODUCT DESCRIPTION

1.1 PRODUCT OVERVIEW

A Solid State Disk (SSD) is a storage device that is based on semiconductors rather than rotating magnetic platters. Most SSDs, including Super Talent's offerings, are based on NAND Flash chips because they are fast, highly reliable, widely available and are non-volatile.

SSDs are 100% compatible with standard hard disk drives, using both industry standard dimensions and a standard hard drive interface. While typical spinning HDDs are the weakest point when it comes to withstanding extremes, an SSD drive is an asset. Along with its durability and reliability, the SSD brings unparalleled performance.

- Casino Gaming
- Embedded/Industrial Systems
- Enterprise Computing
- Notebook
- Medical Industry
- Military and Aerospace

1.2 PRODUCT FEATURES

- Capacity: 256GB,512GB,1TB,2TB
- Form Factor: 2.5"(HDD compatible)
- Supports 1-port 1.5/3.0/6.0Gbps SATA I/II/III interface.
- SMART feature set and 48-bit Address feature set
- Compatibility: Full SATA hard disk compatible
- Ultra rugged and reliable
- High-speed performance
- Silent, no moving parts
- Data retention: JESD47 compliant
- Proprietary wear leveling algorithms
- 100% tested hardware and software

Operating Voltage Requirement: $V_{cc} = 5.0V \pm 10\%$

Operating System: Supported by all operating systems

Interface: SATA 6.0Gbps (SATA-III) or SATA 3.0Gbps (SATA-II) or SATA 1.5Gbps (SATA-I)

Installation Requirements:

- System Hardware which supports SATA-II/SATA-III standards
- System Hardware includes SATA socket or transfer board

2.0 PRODUCT ORDERING PART NUMBERS

2.1 ORDERING PART STRUCTURE

Table 1: Ordering Part Structure

<u>Prefix</u> X	<u>Product</u> XX	<u>Controller</u> XX	<u>Density</u> XXXX	<u>Flash Comp.</u> XX	<u>Temp. & Remark</u> X
A	SA- SATA III 2.5 inch SSD	SA-SM2258XT MA-MAS0902A	128G - 128GByte 256G - 256GByte 512G - 512GByte 001T - 1024GByte 002T - 2048GByte	XT - TLC	C-Commercial

2.2 VALID ORDERING PART NUMBERS

Table 2: Valid Ordering Part Numbers

Product Family	Capacity	Flash	Form Factor	Part Number
2.5" SATA	128GB	TLC	2.5"	ASASA128GXTC
	256GB			ASASA256GXTC
	512GB			ASASA512GXTC
	1TB			ASASA001TXTC
	2TB			ASAMA002TXTC

3.0 PHYSICAL SPECIFICATIONS


3.1 MECHANICAL SPECIFICATIONS(PCBA)

Length: 100.00 ± 0.20 mm

Width: 69.85± 0.20 mm

Thickness: 7.0 ± 0.20 mm

Figure 1: 2.5" SATAIII SSD Outline Drawing

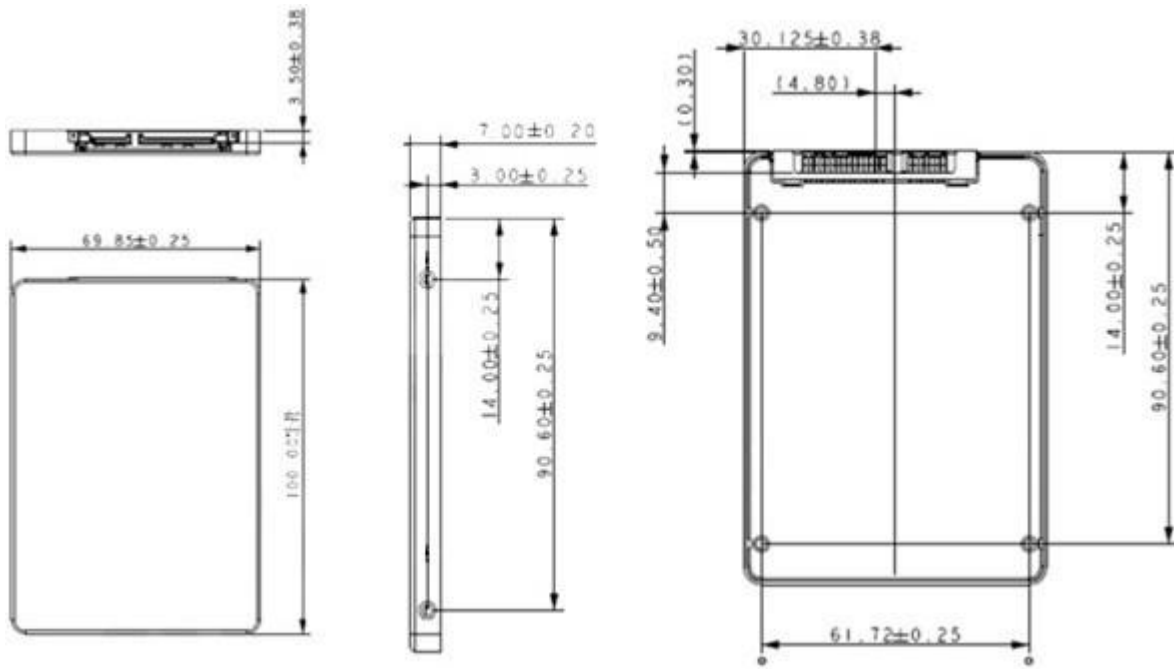

4.0 ELECTRICAL SPECIFICATIONS

Operating Voltage: $V_{cc} = 5.3V \pm 10\%$

Modes: SATA 6.0Gbps (SATA-III) or SATA 3.0Gbps (SATA-II) or SATA 1.5Gbps (SATA-I) standards

4.1 PERFORMANCE SPECIFICATIONS

Access Time: 0.1 ms

Seek Time: 0 ms

Mount Time: Dependent on system HW and SW

Power on to Ready: Dependent on system HW and SW

Data Transfer Time: Rated Data Transfer Speeds are maximums based on Crystal Disk Mark

* 2.5" SATAIII SSD Port and the installation of an enhanced driver required for maximum speed

Table 3: Data Transfer Time Specifications

Device	Sequential Read Max (MB/Sec)	Sequential Write Max (MB/Sec)
ASASA120GXTC	555	499
ASASA256GXTC	560	509
ASASA512GXTC	558	511
ASASA001TXTC	555	513

4.2 ABSOLUTE MAXIMUM RATINGS

Table 4: Absolute Maximum Ratings

Symbol	Rating	Value	Unit
V _{CC}	Power Supply Voltage	-0.3 to +6.5	V
V _{IN}	Input Voltage	-0.5 to V _{CC} +0.5	V
T _{STG}	Storage Temperature	-55 to 115	°C
T _{OPR}	Commercial Grade	0 to +70	°C

4.3 POWER CONSUMPTION TEST FOR RESULT

Table 5: Power Consumption Test for Result

Test software: Crystal Disk Mark6.0.0		Device: 2.5" SATA SSD 1TB			
Times	1	2	3	Power (W=U*I)	
Static current (Idle mode current)				5V*0.075A=0.38W	
Dynamic current (R/W mode current)	Seq. read	561.3	562.0	561.7	5V*0.262A=1.31W
	Seq. write	514.6	515.1	514.3	5V*0.248A=1.24W
	4K Q8T8 read	407.3	408.5	407.5	5V*0.19A=0.627W
	4K Q8T8 write	360.2	360.9	361.5	5V*0.29A=0.957W
	4K Q32T1 read	325.3	326.7	324.5	5V*0.164A=0.82W
	4K Q32T1 write	305.6	307.5	306.2	5V*0.156A=0.78W
	4K Q1T1 read	41.99	42.6	41.46	5V*0.296A=1.48W
	4K Q1T1 write	121.8	124.2	120.9	5V*0.203A=1.02W

5.0 ENVIRONMENTAL SPECIFICATIONS

Operating Temperature:

Commercial Grade: 0°C to +70°C

Humidity: 5% to ~98% RH

Operating Shock: 1500G

Operating Vibration: 16G

Operating Altitude: Operation: 120,000ft

6.0 QUALITY AND RELIABILITY SPECIFICATIONS

Data Retention: JESD47 compliant

Wear Leveling: Static and dynamic wear-leveling algorithm.

Bad Block Management: Failed Blocks of Flash will be replaced with new ones by the SSD.

ECC/EDC (Error Correction Code/Error Detection Code):

- Hardware ECC engine: LDCP ECC engine On-the-fly operation
- 16bit CRC to ensure storage-data integrity between controller and NAND Flash device

MTBF: >1,000,000 hours

Power Cycle: 1000 times

Table 6: Compatibility Test Config

Test Platform: Compatibility Test Config				
Test Items	Total Times	PASS Times	Fail Times	Log Photo
Cycles	1000 times	1000 times	0 times	
Random	1000 times	1000 times	0 times	

7.0 COMPLIANCE SPECIFICATIONS

All 2.5" SATA-III SSD are compliant with the following standards and regulations:

- RoHS

8.0 PIN DESCRIPTIONS

8.1 DATA PIN ASSIGNMENTS

Table 7: Data Pin Signal Assignment

Pin	Signal Name	Description
S1	GND	
S2	PxP	Differential Signal Pair for Receiver
S3	RxN	Differential Signal Pair for Receiver
S4	GND	

8.2 CONFIGURATION DESCRIPTIONS

Table 8: Configuration Description

Pin	Symbol	Description
P1	Not Used(3.3V)	N/A
P2	Not Used(3.3V)	N/A
P3	Not Used(3.3V Precharge)	
P4	GND	1st mate
P5	GND	2nd mate
P6	GND	
P7	5V Precharge	5V Power
P8	5V Precharge	5V Power
P9	5V Precharge	
P10	GND	
P11	Reserved	
P12	GND	
P13	Not Used(12V Precharge)	N/A
P14	Not Used(12V)	
P15	Not Used(12V)	

9.0 SUPPORTED ATA COMMAND SET

9.1 ATA COMMAND REGISTER

2.5" SATA-III SSD supports the command show in the following tables.

Table 9: ATA Command table

Command Name	Code (Hex)	PARAMETERS USED					
		SC	SN	CY	DR	HD	FT
CHECK PWER MODE	E5h	X	X	X	O	X	X
EXECUTE DIAGNOSTICS	90h	X	X	X	O	X	X
FLUSH CACHE	E7h	X	X	X	O	O	X
IDENTIFY DEVICE	ECh	X	X	X	O	X	X
IDLE	E3h	O	X	X	O	X	X
IDLE IMMEDIATE	E1h	X	X	X	O	X	X
INITIALIZE DEVICE PARAMETERS	91h	O	X	X	O	O	X
READ DMA	C8h	O	O	O	O	O	X
READ DMA EXT	25h	O	O	O	O	O	X
READ FPDMA QUEUED	60h	O	O	O	O	O	X
DEAD LOG DMA EXT	47h	O	O	O	O	O	X
READ LOG EXT	2Fh	O	O	O	O	O	X
READ MULTIPLE	C4h	O	O	O	O	O	X
READ SECTOR(S)	20h or 21h	O	O	O	O	O	X
READ VERIFY SECTOR(S)	40h or 41h	O	O	O	O	O	X
RECALIBRATE	10h	X	X	X	O	X	X
SECURITY DIS ABLE PASSWORD	F6h	X	X	X	O	X	X
SECURITY ERASE PREPARE	F3h	X	X	X	O	X	X
SECURITY ERASE UNIT	F4h	X	X	X	O	X	X
SECURITY FREEZE LOCK	F5h	X	X	X	O	X	X
SECURITY SET PASSWORD	F1h	X	X	X	O	X	X
SECURITY UNLOCK	F2h	X	X	X	O	X	X
SEEK	7Xh	X	X	O	O	O	X
SET FEATURES	EFh	O	X	X	O	X	O
SET MULTIPLE MODE	C6h	O	X	X	O	X	X
SLEEP	7xh	X	X	O	O	O	X
SMART	B0h	X	X	O	O	X	O
STANDBY	E2h	X	X	X	O	X	X
STANDBY IMMEDIATE	E0h	X	X	X	O	X	X
WRITE DMA	CAh	O	O	O	O	O	X
WRITE DMA EXT	35h	O	O	O	O	O	X

2.5" SATA-III Datasheet Gold Edition

WRITE FPDMA QUEUED	61h	O	O	O	O	O	X
WRITE LOG DMA EXT	57h	O	O	O	O	O	X
WRITE LOG EXT	3Fh	O	O	O	O	O	X
WRITE MULTIPLE	C5h	O	O	O	O	O	X
WRITE SECTOR(S)	30h or 31h	O	O	O	O	O	X

Note:

O = Valid, X = Don't care

SC = Sector Count Register

SN = Sector Number Register

CY = Cylinder Low/High Register

DR = DEVICE SELECT Bit (DEVICE/HEAD Register Bit 4)

HD = HEAD SELECT Bit (DEVICE/HEAD Register Bit 3-0)

FT = Features Register

Table 10: Features register value and settable operating mode

Value	Function
02h	Enable write cache
03h	Set transfer mode based on value in Sector Count register
55h	Disable read look-ahead feature
82h	Disable write cache
90h	Disable use of SATA feature
AAh	Enable read look-ahead feature

10.0 INSTALLATION

BEFORE GETTING STARTED

1. Back Up Your Data

VISUAL INSPECTION

1. Before unpacking and handling the SSD, discharge the static electricity by touching the metal chassis of your computer or by using an anti-static wrist strap
2. Inspect the box and device for the following
 - a. Box is damaged or water-stained
 - b. Any damage to the SSD

HANDLING THE SSD

1. Be cautious when unpacking, installing, and handling the SSD drive. Misuse of the SSD voids all warranty. Follow the succeeding instructions when managing the SSD
2. Follow all ESD pre-cautions
3. Always operate the SSD within environmental conditions
4. Never switch DC power to the drive by plugging an electrically live source cable into the drive's power connector

INSTALLATION

System Requirements

To install the SSD in your computer, ensure that you have the following items:

1. Mounting Screws (If needed)

Install the SSD

Follow these steps to install the SSD

1. Power down the PC
2. Remove the computer system outside cover
3. Insert the SSD to the connector on motherboard
4. Replace the PC cover
5. Power on the PC

6. A BIOS sign-on message appears and displays a key sequence to enter the BIOS setup. Set up the BIOS to recognize the SSD.
7. Installation is Complete

USING THE SSD IN A MS-DOS OS

The SSD is already partitioned and formatted by NTFS, so if you want to install MS-DOS O/S on the SSD, it should be re-partitioned and re-formatted. After installing the SSD, it must be installed as a disk drive under DOS. Run the DOS commands as listed below and follow the instructions displayed for each command.

1. Run the DOS FDISK program to partition the SSD
2. Verify that the partition is active and ready for formatting
3. Run the DOS FORMAT command to high-level format the SSD

USING THE SSD IN A WINDOWS OS

No modifications need to be made to use the SSD in a Windows OS platform

USING THE SSD IN A LINUX O/S

Port driver is needed to be made to use the SSD in Linux OS platforms.

USING THE SSD IN OTHER O/S

Port driver is needed to be made to use the SSD in other OS platforms.

CHANGE RECORD

Table 10: Change Record

Version	Release Date	Changes
1.0	Jan. 04, 2019	Initial Release in new template