

SSD-TX1024

EX-SDI/HD-SDI PoC/CoC Transmitter

- Signal Cable Transmission EX-SDI/HD-SDI Video Signal, Power, OSD & Zoom Lens Control
- Auto Detect 1080P/30fps EX-SDI or HD-SDI PoC Camera input
- EX-SDI working distance up to 250 Meter via 5C2V
- Input: EX-SDI (BNC) x 1; Output: HD-SDI (BNC) x 1, HDMI Output x1
- Over Load Protection




Specifications

Model	SSD-TX1024
SDI Standard	For EX-SDI & HD-SDI One Cable Camera
Input	HD-SDI (BNC) x 1 (Golden Plated)
Cable Transmission Distance	EX-SDI PoC Camera 250 Meter Via 5F-FB or 5C2V HD-SDI PoC Camera 120 Meter Via 5F-FB or 5C2V
PoC Transmission	EX-SDI or HD-SDI Video/Power/Control (OSD & Zoom)
SDI Resolution	EX-SDI 1080P/25/30fps; HD-SDI 1080P/25/30/50/60fps
OSD Control	5 Keys buttons
Zoom/Motorized Lens Control	Zoom in/Out & Focus Near/Far via Tact Switch
SDI Output	HD-SDI (BNC) x 1 (Silver)
HDMI Output	HDMI (1.3a) Type 1 Connector x 1
HDMI Resolution	1080P@25/30/50/60fps, HD 720P@25/30/50/60fps
Power in	DC24V / 1.0A
LED indicator	Green: Power in Red: PoC Power Out
Over Load Protection	Resettable Fuse, over load auto power-down
Temperature / Humidity	-10 ~ +40°C
Case / Weight	Aluminum / 120g
Dimension	45 (W) x 60 (H) x 25 (D) mm

*Specifications are subject to change without notice. 20170713

Dimensions

Tol: ±0.5 Unit: mm

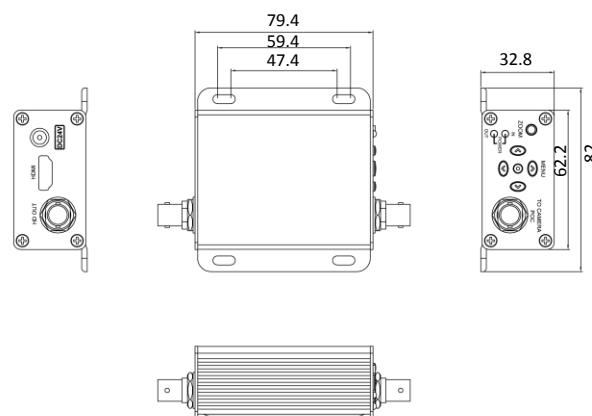

Connection Diagram

